

STONE LOOK

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE



daltile®

IMAGINE WHAT'S POSSIBLE™

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE TILE

Dramatic marble & stone look ColorBody™ porcelain tile, Vertuo™, provides the perfect answer for luxurious tastes craving durability, all while using the essential color blocks of black, white and grey. The line features several unique large sizes, an all new 8 x 48 plank size in marble look visuals, plus a chevron mosaic – all of which have coordinating colors and graphics allowing for a truly masterful design.

STONE LOOK

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR

SPECIAL FEATURES

- STEPWISE™
- TRU-EDGE™
- REVEAL SYNC3D™
- MADE IN THE U.S.A.
- LARGE FORMAT
- MOSAIC/ DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE

LOW — HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover photo features Vertuo™ Stria Maestro, 8 x 48 in a herringbone pattern and Composer 24 x 48 in a straight grid pattern on the floor with Maestro, 24 x 48 on the columns.
Above photo features Vertuo™ Stria Maestro, 8 x 48 in a herringbone pattern on the floor.

STONE LOOK

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE

SIZES:

- 24 x 48 Floor Tile
- 24 x 24 Floor Tile
- 24 x 24 Paver Tile
- 8 x 48 Floor Tile
- 12 x 24 Floor Tile
- Chevron Mosaic Tile

FINISHES: MATTE

FLOOR TILE



MAESTRO VR10

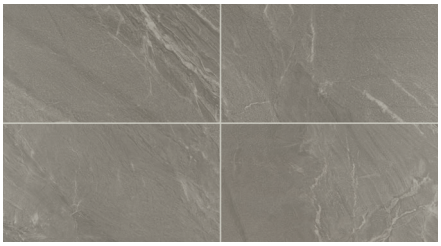

COMPOSER VR11

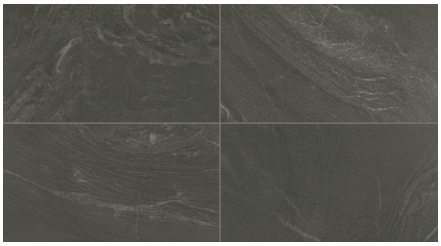

BRAVURA VR12

FLOOR TILE – STRIA

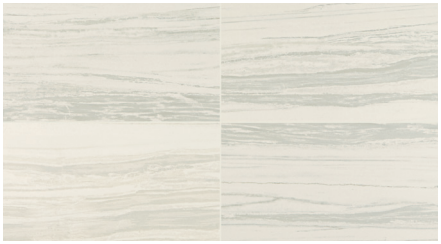

STRIA MAESTRO VR13

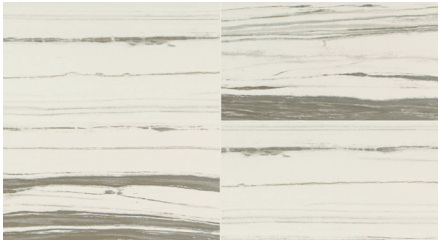

STRIA COMPOSER VR14

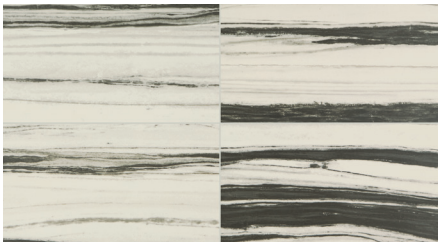

STRIA BRAVURA VR15

CHEVRON MOSAIC



MAESTRO VR10



COMPOSER VR11



BRAVURA VR12

CHEVRON MOSAIC – STRIA



STRIA MAESTRO VR13



STRIA COMPOSER VR14



STRIA BRAVURA VR15

SLIP RESISTANT

WATERPROOF

STAINPROOF

DENTPROOF

SCRATCH-RESISTANT*

*Applicable to products with Matte and Textured Finishes

FIRE-RESISTANT*

*Not Applicable to Mesh-Mounted Mosaics

CLIMATEPRO™

SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC TILE

STONE LOOK

SIZES

		Thickness	Finish	Made in the U.S.A.
24 x 48* Floor Tile	23-3/8" x 46-15/16" (59.44 cm x 119.30 cm)	5/16"	M	
24 x 24* Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M	
24 x 24** Textured Paver Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	13/16" (2 cm)	M	
8 x 48 Floor Tile	7-3/4" x 46-15/16" (19.70 cm x 119.20 cm)	5/16"	M	
12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M	
2 x 5 Chevron Mosaic Tile (Mesh-mounted)	12" x 12" Sheet (30.48 cm x 30.48 cm Sheet)	5/16"	M	

Made in the U.S.A. designation is subject to change. Please visit daltile.com for the most current manufacturing information.

M Matte Finish

* Available in VR10, VR11, & VR12 only.

** Available in VR10 & VR11 only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	✓*
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Mosaic tile only
** Paver tile only

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

	Type	Number	Size	Finish
	Bullnose	P43F9	3 x 24	M
	Cove Base*	P36C9	6 x 12	M
	Cove Outcorner*	PC36C9	1 x 6	M

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

M Matte Finish

* Available in VR10, VR11, & VR12 only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) **Mosaic:** 1/8"	High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor/Mosaic Result	Paver Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	≥ 275 lbf	> 2,000 lbf
Scratch Hardness	C1895	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 and ANSI A137.3 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

CERTIFIED PORCELAIN TILE 0.5% or less water absorption

ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com.**

daltile®

©2026 Daltile (10/26)