



STONE LOOK

VERTUO™
COLORBODY™ PORCELAIN FLOOR & MOSAIC



 **dalTile**®
IMAGINE WHAT'S POSSIBLE™

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC

Back to Essentials

Dramatic marble & stone look ColorBody™ porcelain tile, Vertuo™, provides the perfect answer for luxurious tastes craving durability, all while using the essential color blocks of black, white and grey. The line features several unique large sizes, an all new 8 x 48 plank size in marble look visuals, plus a chevron mosaic – all of which have coordinating colors and graphics allowing for a truly masterful design.

• FLEXIBLE CREATIVITY

- Offered in six neutral yet powerful colors
- Inspired by the dramatic Belvedere & Orca Marbles
- Mix and match between solids & stria visuals

• IMPRESSIVE FEATURES

- Four unique sizes offered for the floor
- Coordinating Chevron Mosaics available in all six color palettes
- TruEdge™ technology implemented for minimal grout joints



Cover photo features Vertuo™ Stria Maestro 8 x 48 in a herringbone pattern and Composer 24 x 48 in a straight grid pattern on the floor with Maestro 24 x 48 on the columns.
Above photo features Vertuo™ Stria Maestro 8 x 48 in a herringbone pattern on the floor.

STONE
LOOK

USAGE



SPECIAL FEATURES

SEE CHARTS FOR FULL
PRODUCT DETAILS

SIZES:



24 x 48
Floor Tile



24 x 24
Floor Tile



24 x 24
Paver Tile



8 x 48
Floor Tile



12 x 24
Floor Tile




Chevron
Mosaic

FINISHES: MATTE

FLOOR TILE



MAESTRO VR10

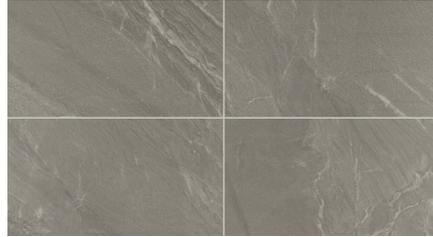

COMPOSER VR11



BRAVURA VR12

FLOOR TILE – STRIA



STRIA MAESTRO VR13



STRIA COMPOSER VR14



STRIA BRAVURA VR15

CHEVRON MOSAIC



MAESTRO VR10



COMPOSER VR11

CHEVRON MOSAIC – STRIA



STRIA MAESTRO VR13



STRIA COMPOSER VR14



BRAVURA VR12



STRIA BRAVURA VR15



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

VERTUO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC

STONE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	24 x 24+ Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	24 x 24++ Paver Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	13/16" (2 cm)	7.60	2
	8 x 48 Floor Tile	(7-3/4" x 46-15/16") (19.71 cm x 119.30 cm)	5/16"	15.18	6
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12	8
	2 x 5 Chevron Mosaic Mesh-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	5/16"	7.70	10

+ Available in VR10, VR11, & VR12 only

++ Available in VR10 & VR11 only

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

** Paver tile only

TRIM

Type	Number	Size	Pieces/ Carton
	P-43F9	3 x 24	10
	P-36C9TB	6 x 12	22
	PC-36C9TB	6 x 1	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

+ Available in VR10, VR11, & VR12 only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 High (V3)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor/Mosaic Result	Paver Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs	> 2,000 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 and ANSI A137.3 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

 **PRE-CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

ZEROTOX
Healthy Homes | Healthy Planet

CERTIFIED PORCELAIN
TILE
0.5% or less water absorption

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

daltile®
IMAGINE WHAT'S POSSIBLE™
©2023 Daltile (3/23)