

DARE TO BE BOLD

BASALTO™

COLORBODY™ PORCELAIN

TRUEDGE™ | REVEAL IMAGING®

MARAZZI 

DARE TO BE BOLD™



BASALTO™




PIOMBO

Inspired by dark-colored, fine-grained basalt, Basalto offers smooth monochromatic style. Available in four neutral colors in 12x24 or 24x48 large-format sizes. The collection also offers 2CM thick outdoor pavers in 32x32 and 20x40. Crafted with Italian precision, Basalto is a tile that will stand the test of the ages.

SABBIA



POMICE

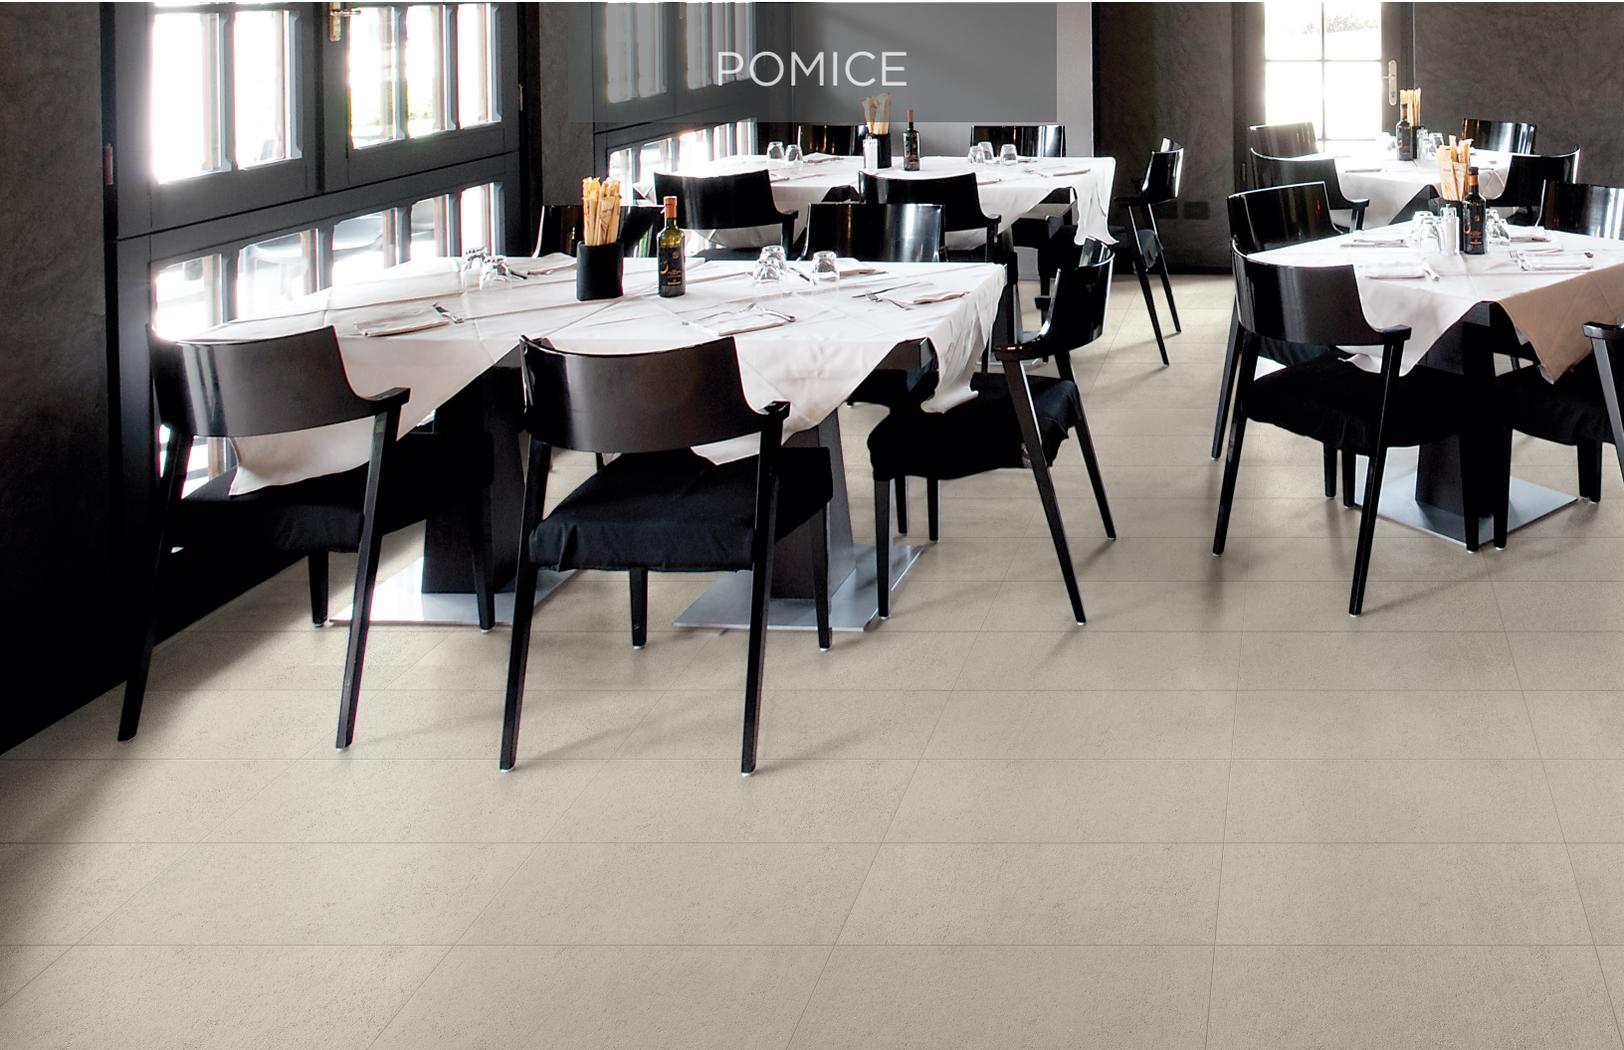

POMICE & PIOMBO




BASALTO™


COLORBODY™ PORCELAIN

TRUEDGE™ | REVEAL IMAGING®

FLOOR TILE

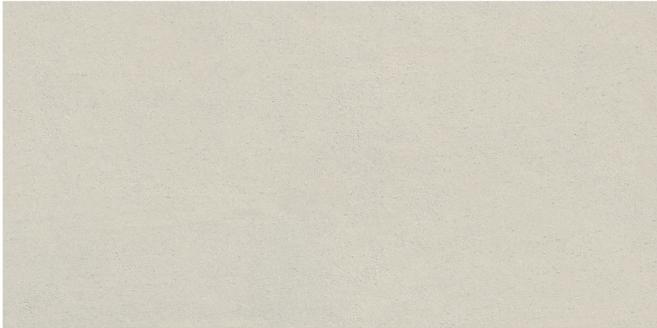

BT25 Pomice

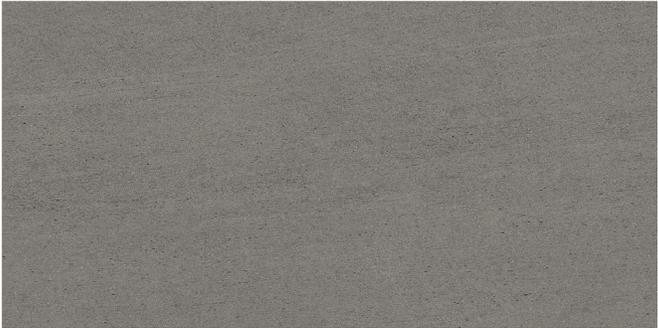

BT26 Sabbia



BT27 Piombo



BT28 Lava

USAGE

| Floors | Walls | Countertops |
|--------|-------|-------------|
| F | W | C |

SIZES

| | | | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|------------------------|--|---------------|--------------------|-------------------|
|  | 24 x 48 Floor Tile | (23-7/16" x 46-15/16") (59.50 cm x 119.30 cm) | 3/8" | 15.52 | 2 |
|  | 12 x 24 Floor Tile | (11-11/16" x 23-7/16") (29.65 cm x 59.50 cm) | 3/8" | 11.64 | 6 |
|  | 32 x 32 Paver Tile* | (30-5/16" x 30-5/16") (79.50 cm x 79.50 cm) | 13/16" 2cm | 6.89 | 1 |
|  | 20 x 40 Paver Tile* | (19-1/2" x 39-3/16") (49.50 cm x 99.50 cm) | 13/16" 2cm | 5.38 | 1 |

* Special order

Special order colors only available in BT26, BT27 and BT28

APPLICATIONS

| | Target DCOF wet | Suitable |
|--|--------------------|----------------------------|
| Dry & Level - Interior Floor | N/A | ■ |
| Wet & Level - Interior Floor | ≥ 0.42 | ■ |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | ■ (2cm Paver Tile only) |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ■ |
| Countertops | N/A | ■ |
| Pool Linings | N/A | |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.



All or select items within this series meet the requirements for these qualifications. For more information visit marazzitile.com.

TRIM

| Description | Number | Size | Shape |
|---------------------|----------|--------|---|
| Floor Bullnose | S-43F9 | 3 x 24 |  |
| Floor Bullnose* | S-43U9 | 3 x 35 |  |
| Cove Base | S-36C9T | 6 x 12 |  |
| Cove Base Outcorner | SC-36C9T | 1 x 6 |  |

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

* Special order

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|---|--|
| 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) |  Medium Variation |

PERFORMANCE CHARACTERISTICS

| | ASTM# | Floor Result |
|---------------------|-------|-------------------------------|
| Water Absorption | C373 | < 0.5% |
| Breaking Strength | C648 | > 275 lbs > 1000 lbs (2cm) |
| Scratch Hardness | MOHS | 8.0 |
| Chemical Resistance | C650 | Resistant |
| Abrasion Resistance | C1027 | N/A |

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazzitile.com/LargeTiles for more information.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

PHOTOGRAPHY INDEX:

Cover

Basalto™ in Sabbia 12 x 24 on floor

Page 2-3

Basalto™ in Piombo 20 x 40 2CM on floor

Page 4 Top

Basalto™ in Sabbia 12 x 24 on floor

Page 4 Bottom

Basalto™ in Pomice 12 x 24 on floor

Page 5

Basalto™ in Pomice 12 x 24 on wall & Piombo 12 x 24 on floor

MARAZZI ®
DARE TO BE BOLD™

7834 C.F. Hawn Freeway
Dallas, Texas 75217

www.marazzitile.com
contact@marazzitile.com

©2019 Marazzi | 06.19 | MZBRO129 Basalto™ Brochure

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with Marazzi Customer Service for details.