

BLOCK™
COLORBODY™ PORCELAIN

MARAZZI 
DARE TO BE BOLD™

CONCRETE LOOK



BLOCK™

Marazzi's Block™ series emphasizes naturalness and imperfection while expressing beauty in this new Colorbody™ rectified porcelain interpretation of hand-cast concrete. Updated with an alternating matte/glossy surface treatment atop a lightly troweled structure, this collection in four colors effectively adapts to different design styles.



COVER PHOTO: BLACK
ABOVE PHOTO: SILVER

CONCRETE LOOK

FINISHES: MATTE

USAGE			MATERIAL		PRICING		SPECIAL FEATURES						
													
FLOOR	WALL	COUNTERTOP	PC COLORBODY™ PORCELAIN	LOW HIGH	STEPWISE™	TRUEDGE™	MADE IN THE U.S.A.	LARGE FORMAT	MOSAIC/ DECO	ENCAUSTIC	TERRAZZO	PAVER	CUSTOMIZE


CONCRETE LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.


FLOOR TILE



BK05 White

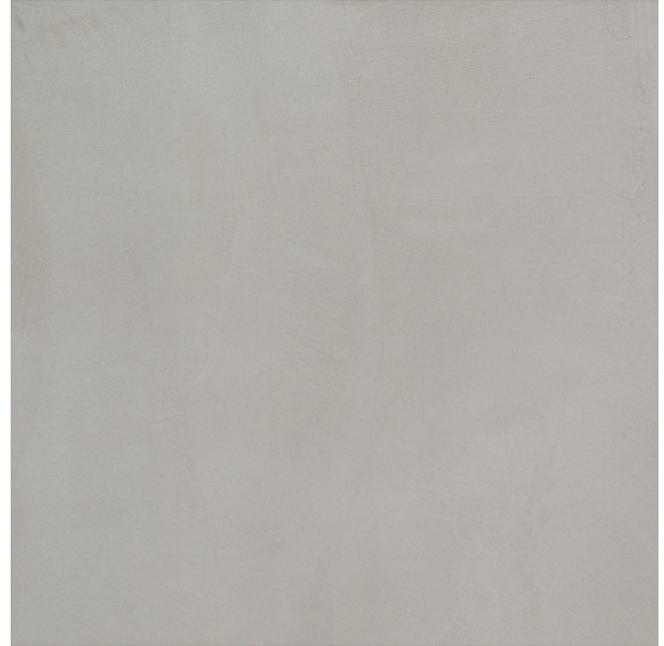

BK02 Silver

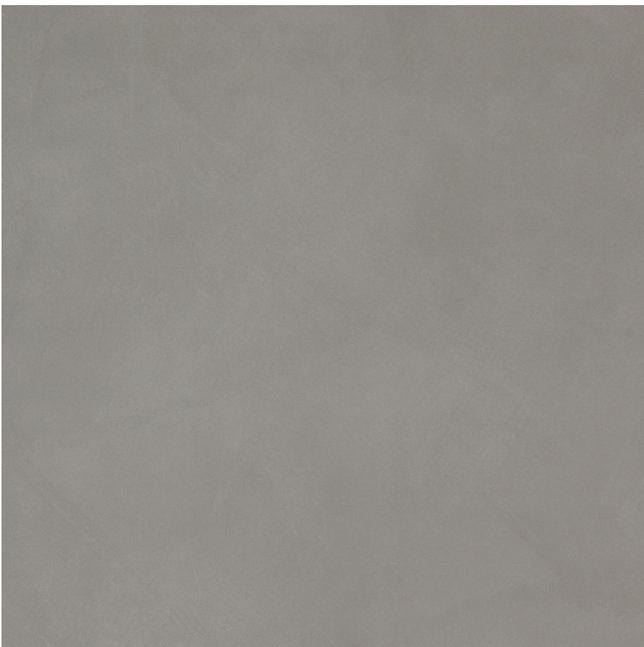

BK03 Greige



BK01 Black

							
SLIP RESISTANT	WATERPROOF	STAINPROOF	DENTPROOF	SCRATCH-RESISTANT	FIRE-RESISTANT	CLIMATEPRO™	SIMPLICLEAN™

VISIT MARAZZITILE.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
FLOOR WALL COUNTERTOP SHOWER FLOOR EXTERIOR FLOOR	PC <small>ColorBody™</small>	LOW HIGH	STEPWISE™ TRUEDGE™ MADE IN THE U.S.A. LARGE FORMAT MOSAIC/DECO ENCAUSTIC TERRAZZO PAVER CUSTOMIZE

CONCRETE LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	23-7/16" x 47-1/16" (59.50 cm x 119.50 cm)	3/8"	15.50	2
	24 x 24 Floor Tile	23-7/16" x 23-7/16" (59.50 cm x 59.50 cm)	3/8"	11.64	3
	12 x 24 Floor Tile	11-11/16" x 23-7/16" (29.65 x 59.50 cm)	3/8"	11.64	6

TRIM

Description	Number	Size	Shape
Floor Bullnose	S43F9	3 x 24	

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■
Wet & Level – Interior Floor	≥ 0.42	■
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	Medium Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazziusa.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

	PRE-CONSUMER RECYCLED MATERIALS		REVEAL IMAGING®
	CERTIFIED PORCELAIN™ <small>SCS of ANSI A137.1</small>		ZEROTOX <small>Healthy Homes Healthy Planet</small>

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.