CRU CLASSE™

GLAZED CERAMIC WALL TILE

MARAZZI

WALL



CRU CLASSE™

Introducing Cru Classe, a ceramic wall tile inspired by the ancient and refined glazing methods of Japan, expressed through a color palette that embodies a bold spirit of beauty and heritage. Echoing techniques passed down through generation this series reveals a subtle yet expressive visual character. Mineral-rich, reactive-glaze, linear 2 x 16 design with a glossy finish, creates depth, variation, and drama. Cru Classe is a series that delivers a distinctive contemporary look with depth and organic movement, while connecting to traditions of excellence and artistic craftsmanship.



Cover photo features Bordeaux, 2 x 16 on the wall.
Above photo features Champagne, 2 x 16 on the wall.

CRU CLASSE™

GLAZED CERAMIC WALL TILE

MARAZZI

FINISHES: GLOSSY

USAGE: FLOOR, **WALL**, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: CG GLAZED CERAMIC

PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

GLAZED CERAMIC WALL TILE



CI73 Syrah



CI75 Bordeaux



CI72 Madeira

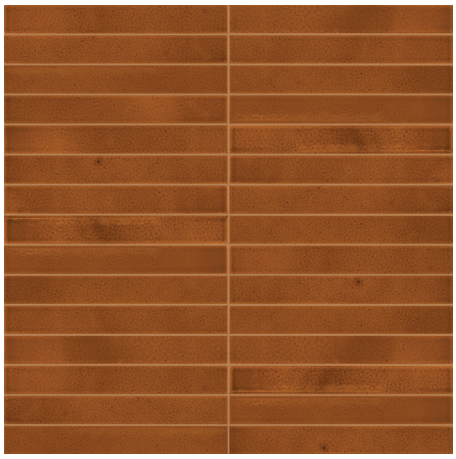

CI74 Semillon

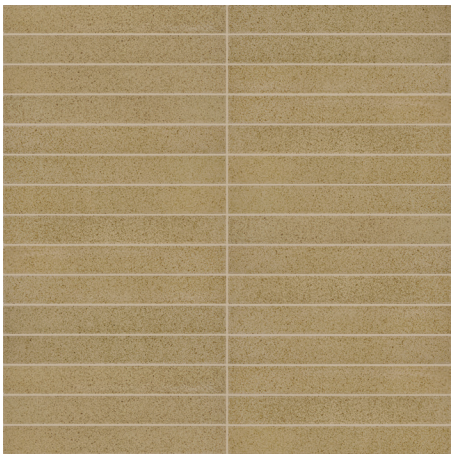

CI71 Chardonnay

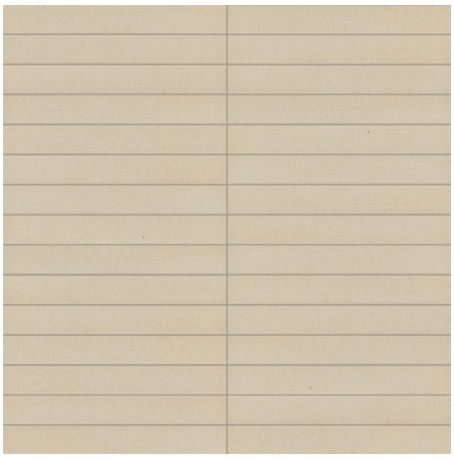

CI70 Champagne

WATERPROOF, DENTPROOF, FIRE-RESISTANT, SIMPLICLEAN™

VISIT MARAZZIUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

CRU CLASSE™

GLAZED CERAMIC WALL TILE

MARAZZI

FINISHES: GLOSSY

USAGE: FLOOR | WALL | COUNTERTOP | SHOWER FLOOR | EXTERIOR FLOOR

MATERIAL: CG GLAZED CERAMIC

PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™ | TRUEDGE™ | REVEAL SYNC3D™ | MADE IN THE U.S.A. | LARGE FORMAT | MOSAIC/DECO | ENCAUSTIC | TERRAZZO | PAVER | CUSTOMIZE

WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Finish
▭	2 x 16 Wall Tile	1-15/16" x 15-11/16" (5.00 cm x 40.00 cm)	5/16"	G

G Glossy Finish

TRIM

Description	Number	Size	Shape	Finish
Jolly	S5/812J	5/8 x 12		G

G Glossy Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%. Use straight-joint only when using the same pattern.)	V2 Medium Variation (C170 & C171 only) V3 High Variation (C175 & C173 only) V4 Random Variation (C174 & C172 only)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	≥ 125 lbf
Scratch Hardness	C1895	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazziusa.com/LargeTiles for more information.

CAUTION

Crackle tiles must be sealed with a penetrating sealer prior to grouting.

Periodic resealing of crackle tile is required.

Wall installation only where tile will not come into contact with staining agents including food.

Not recommended for wet areas where the tile is subject to frequent or prolonged contact with water.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.

© 2026 Marazzi (10/26)