

CURATION™

COLORBODY™ PORCELAIN FLOOR & MOSAIC AND GLAZED PORCELAIN FLOOR

MARAZZI®

DARE TO BE BOLD™

TERRAZZO





# CURATION™

Elevate your surroundings with the elegance of Curation, a terrazzo-inspired series that offers a bold selection of colors in an assortment of sizes and styles. Opt for a sleek 2 x 9 brick for refined simplicity, or dive into a retro look with splatter designs available in large formats and mosaics that bring visual intrigue to any room. Designed for versatility and durability, our splatter floor tile is available in polished and matte finishes, making it an ideal choice for low and high-traffic areas. Transform your surroundings with the timeless sophistication of Curation — designed to reflect your unique style.



Cover photo features Stucco Splatter design, 24 x 24 on the floor and Stucco Refined design on the fireplace.  
Above photo features Clay Splatter design, 24 x 24 on the floor.

TERRAZZO



## USAGE




## MATERIAL



## PRICING



## SPECIAL FEATURES



## TERRAZZO

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.


### SPLATTER FLOOR TILE




CA12 Shore



CA13 Stucco

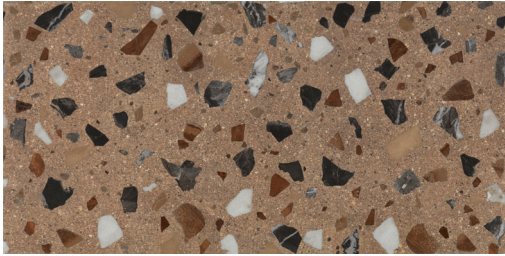

CA14 Clay

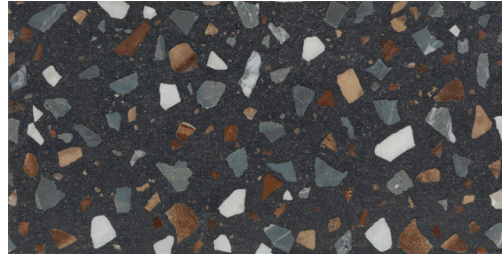


CA15 Current


### 2 x 9 FLOOR TILE



CA12 Shore



CA13 Stucco



CA14 Clay




CA15 Current


### SPLATTER 2 x 2 MOSAIC TILE




CA12 Shore



CA13 Stucco




CA14 Clay




CA15 Current


### SPLATTER 3" HEXAGON MOSAIC TILE




CA12 Shore



CA13 Stucco



CA14 Clay



CA15 Current



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLECLEAN™

VISIT [MARAZZIUSA.COM/WHYTILE](http://MARAZZIUSA.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE | POLISHED

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

MATERIAL

PC

PG

PRICING

LOW

HIGH

SPECIAL FEATURES

STEPWISE™

TRUEEDGE™

REVEAL SYNCSD™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

TERRAZZO

SIZES

			Thickness	Finish	Made in U.S.A.
	24 x 48 Splatter Floor Tile	23-3/8" x 46-15/16" (59.44 cm x 119.20 cm)	5/16"	M P	
	24 x 24 Splatter Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	M P	
	12 x 24 Splatter Floor Tile	11-5/8" x 23-3/8" (29.56 x 59.44 cm)	5/16"	M P	
	2 x 9 Floor Tile	2" x 9" (6.00 cm x 24.60 cm)	3/8"	M	
	2 x 2 Splatter Mosaic Tile (Mesh-mounted)	12" x 12" Sheet (30.48 cm x 30.48 cm Sheet)	5/16"	M	
	3" Hex Splatter Mosaic Tile (Mesh-mounted)	14-5/8" x 12-1/8" Sheet (37.15 cm x 30.80 cm Sheet)	5/16"	P	

M Matte Finish P Polished Finish

TRIM

Description	Number	Size	Shape	Finish
Floor Bullnose	P43C9	3 x 12		M P

M Matte Finish P Polished Finish

NOTE: Trim is available in SPLATTER design only

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■
Wet & Level – Interior Floor	≥ 0.42	■*
Shower Floors – Standard Center Drain	≥ 0.42	■**
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	■**
	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	■***

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazziusa.com/DCOF](https://marazziusa.com/DCOF).

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

- \* Matte floor and mosaic tile only.
- \*\* Matte mosaic tile only.
- \*\*\* Mosaic tile and 2 x 9 floor tile only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
<b>Floor Tile:</b> 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern, overlap should not exceed 33%). <b>2 x 9 Floor Tile:</b> 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) <b>Mosaic Tile:</b> 1/8"	<div>V2</div> Medium Variation (Splatter design only.) <div>V3</div> High Variation (2 x 9 floor tile only.)

PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbf	> 275 lbf
Scratch Hardness	C1895	8.0	6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: [marazziusa.com/information/TestResults](https://marazziusa.com/information/TestResults).

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	③	All Residential / Light Commercial*
2	All Residential Areas	④	All Residential / Commercial**

- \* 3" Hexagon mosaic tile & 2 x 9 tile only.
- \*\* 24 x 48, 24 x 24, & 12 x 24 floor tile and 2 x 2 mosaic tile only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [marazziusa.com/Factors](https://marazziusa.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [marazziusa.com/LargeTiles](https://marazziusa.com/LargeTiles) for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](https://www.tileusa.com).

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit [marazziusa.com](https://marazziusa.com).

CERTIFIED PORCELAIN

ZEROTOX