

FINISHES: GLOSSY

USAGE



MATERIAL



PRICING




SPECIAL FEATURES



WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL TILE - BEVEL

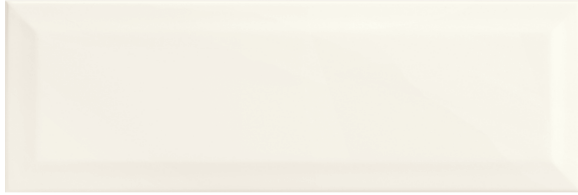

HT15 Refined White 4 x 12



HT17 Scholarly Gray 4 x 12


WALL TILE - FLAT



HT15 Refined White 10 x 14



HT17 Scholarly Gray 10 x 14

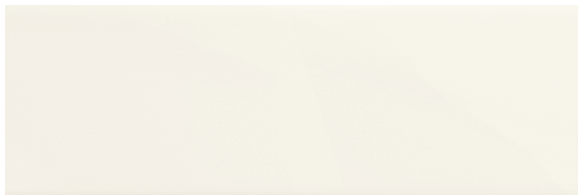

HT15 Refined White 4 x 12



HT17 Scholarly Gray 4 x 12



STAINPROOF



DENTPROOF



FIRE-RESISTANT



SIMPLICLEAN™

FINISHES: GLOSSY

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Finish
	10 x 14 Flat Wall Tile	9-13/16" x 13-15/16" (24.99 cm x 35.40 cm)	5/16"	G
	4 x 12 Flat Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	G
	4 x 12 Bevel Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	3/8"	G

G Glossy Finish

TRIM

Description	Number	Size	Shape	Finish
Jolly	S1/212J	1/2 x 12		G

G Glossy Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)
	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
10 x 14: 1/16"	Low Variation
4 x 12: 1/16" (when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%). Features a lugged edge that creates an automatic 1/16" grout joint.	

PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20%
Breaking Strength	C648	≥ 125 lbf
Scratch Hardness	C1895	≥ 4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

MUNSELL / LRV CHART

Color Code	Color Code	Munsell	LRV
HT15	7.0 Y	9.2/0.2	83.9
HT17	1.0 GY	7.5/0.2	51.1

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmations should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.