GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAICS WITH MICROBAN® TECHNOLOGY



FABRIC LOOK

# 

Inyo takes a rustic approach to porcelain tile with its moody crackle design. The handsome leather look, available in five rich colors, creates a warm and luxe aesthetic and offers a lifetime of antimicrobial surface protection that does not wash off or wear away thanks to DEFEND<sup>™</sup> powered by Microban<sup>®</sup>. Select from must-have sizes:  $2 \times 8$ , 8'' hexagon,  $1 \times 6$  mosaic, and the penny round mosaic – each thoughtfully curated for a custom appeal. Look no further, Inyo is essential to your luxury design.



Cover photo features Inyo<sup>™</sup> Ember, 2 x 8 on the right wall and Savior<sup>™</sup> Cafe, 12 x 24 on the floor. Above photo features Inyo<sup>™</sup> Olive and Crema, 2 x 8 on the walls and Scenario<sup>™</sup> Nerø, 8 x 8 on the floor.

FABRIC LOOK



GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAICS WITH MICROBAN® TECHNOLOGY






NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

### 2 x 8 FLOOR TILE



### 1 x 6 MOSAIC TILE - 12 x 10 SHEET

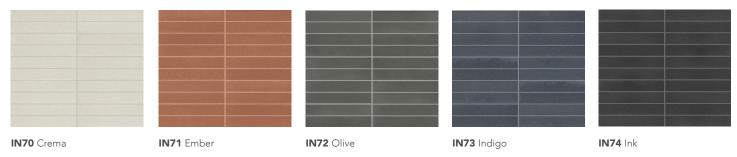

### PENNY ROUND MOSAIC TILE – 13 x 11 SHEET



VISIT MARAZZIUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.



GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC MOSAICS WITH MICROBAN® TECHNOLOGY

SPECIAL FEATURES

FINISHES: MATTE | SATIN

USAGE

Æ







FABRIC LOOK

DARE TO BE BOLD

MARA77

SIZES					
			Thickness	Finish	
	2 x 8 Floor Tile	2-1/4" x 7-15/16" (5.65 cm x 20.26 cm)	3/8"	S	
$\bigcirc$	8" Hexagon Floor Tile	7-7/8" x 9-1/16" (19.95 x 23.04 cm)	5/16"	S	
	1 x 6 Mosaic (Dot-mounted)	11-1/2" x 9-3/4" Sheet (29.21 cm x 24.76 cm Sheet)	5/16"	5	
	Penny Round Mosaic (Dot-mounted)	13-3/8" x 11-3/8" Sheet (33.97 cm x 28.89 cm Sheet)	1/4"	M	

S Satin Finish M Matte Finish

### **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	*
Shower Floors – Standard Center Drain	≥ 0.42	*
	≥ 0.42 (Mosaic)	**
Shower Floors – Linear Drain	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	***

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest<sup>™</sup>, visit marazziusa.com/DCOF.

### **APPLICATION NOTES:**

Floor Tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

\* Penny Round mosaic only.

\*\* Mosaic tile only.

\*\*\* 2 x 8 Floor and mosaic tile only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation		
Floor Tile: 3/16"	High		
Mosaic Tile: 1/8"	Variation		

### **PERFORMANCE CHARACTERISTICS**

ASTM#	Floor Result	Mosaic Result
C373	< 0.5%	< 3.0%
C648	> 275 lbf	> 250 lbf
C1895	8.0	8.0
C650	Resistant	Resistant
	C373 C648 C1895	ASTM# Result   C373 < 0.5%

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

### DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa. com/Factors.

Use of a latex modified thin-set is recommended for installation. For more information, visit marazziusa.com.

### **FEATURES**



PRE-CONSUMER



POST-CONSUMER RECYCLED MATERIALS

RCELAIN **ZERO**T®X

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.