

**RHYME AND REASON™**  
GLAZED CERAMIC

**MARAZZI**  
DARE TO BE BOLD™

MONOCHROMATIC LOOK





# RHYME AND REASON™

There's a rhyme and reason to this playfully poetic wall tile. Each piece features a unique textured surface, creating bold patterns that add depth and interest into your design. Curate a modern atmosphere with the clever color palette and endless installation options; Rhyme and Reason was designed with the trendsetter in mind.



COVER PHOTO: WARM TERRACOTTA  
ABOVE PHOTO: INDIGO

MONOCHROMATIC LOOK



FINISHES: MATTE

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



MONOCHROMATIC LOOK

SEE CHARTS FOR FULL PRODUCT DETAILS.


## 6 x 6 WALL TILE - RANDOM ASSORTMENT




RR16 Bone




RR17 Canvas

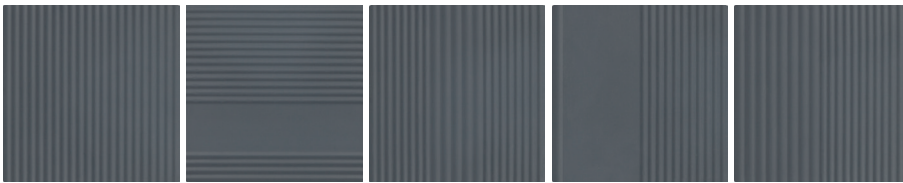

RR18 Indigo

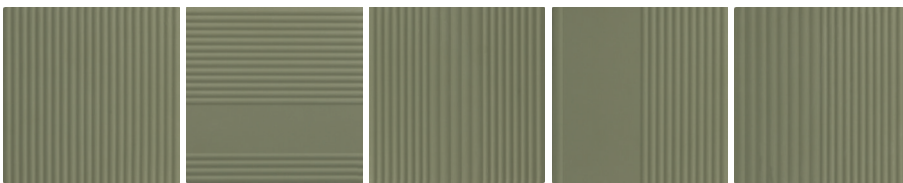


RR19 Artichoke

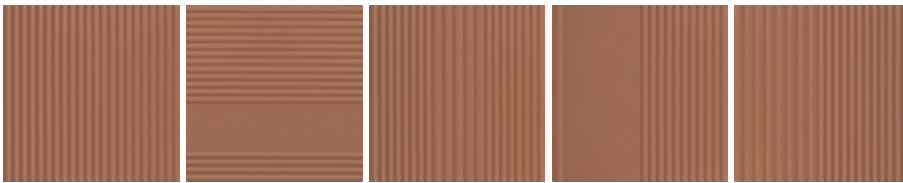


RR20 Warm Terracotta


## 4 x 5 HEX WALL TILE - RANDOM ASSORTMENT

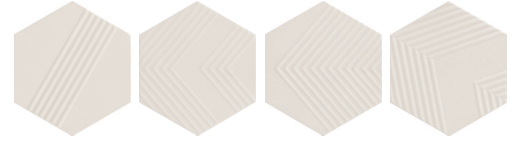


RR16 Bone

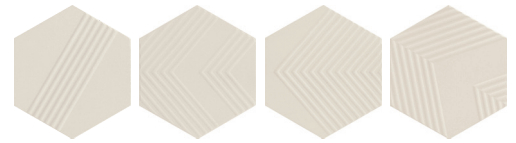


RR17 Canvas

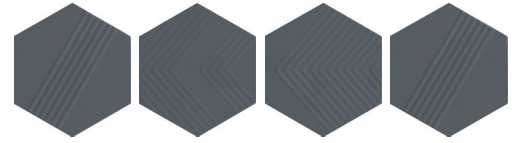

RR18 Indigo

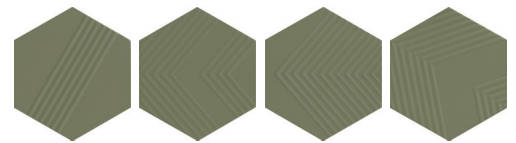

RR19 Artichoke

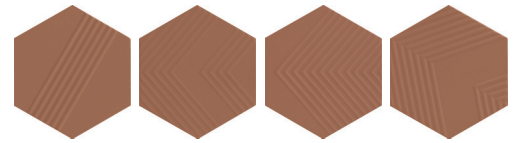

RR20 Warm Terracotta

**NOTE:** 6 x 6 includes five unique structures that are pre-boxed in a random assortment. Individual designs are not sold separately.

**NOTE:** 4 x 5 Hex includes four unique structures that are pre-boxed in a random assortment. Individual designs are not sold separately.



VISIT MARAZZUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



MONOCHROMATIC COLOR

SEE CHARTS FOR FULL PRODUCT DETAILS.

## SIZES

			Thickness	Finish	Made in U.S.A.
	6 x 6 Wall Tile	6" x 6" (15.31 cm x 15.31 cm)	1/4"	M	
	4 x 5 Hex Wall Tile	4-1/4" x 4-15/16" (10.88 cm x 12.57 cm)	1/4"	M	

M Matte Finish

## TRIM

Description	Number	Size	Shape	Finish
Jolly	S1/212J	1/2 x 12		M

M Matte Finish

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	
	≥ 0.60 (Floor)	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazziusa.com/DCOF](http://marazziusa.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

## LRV & MUNSELL

Color#	LRV	Munsell
	<b>Illuminate-OBS: F02-02 (CWF)</b>	
Bone	84.7	4.5Y 9.3/0.3
Canvas	59.58	1.1Y 8.0/0.7
Indigo	9.2	1.9PB 3.6/1.0
Artichoke	17.5	4.2GY 4.8/1.7
Warm Terracotta	15.9	2.2Y 4.5/3.8

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	Low Variation

## PERFORMANCE CHARACTERISTICS

	ASTM#	Results
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbf
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [marazziusa.com/information/TestResults](http://marazziusa.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: [marazziusa.com/Factors](http://marazziusa.com/Factors).

## FEATURES



ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit [marazziusa.com](http://marazziusa.com).