
SCENARIOTM

PATTERN GUIDE







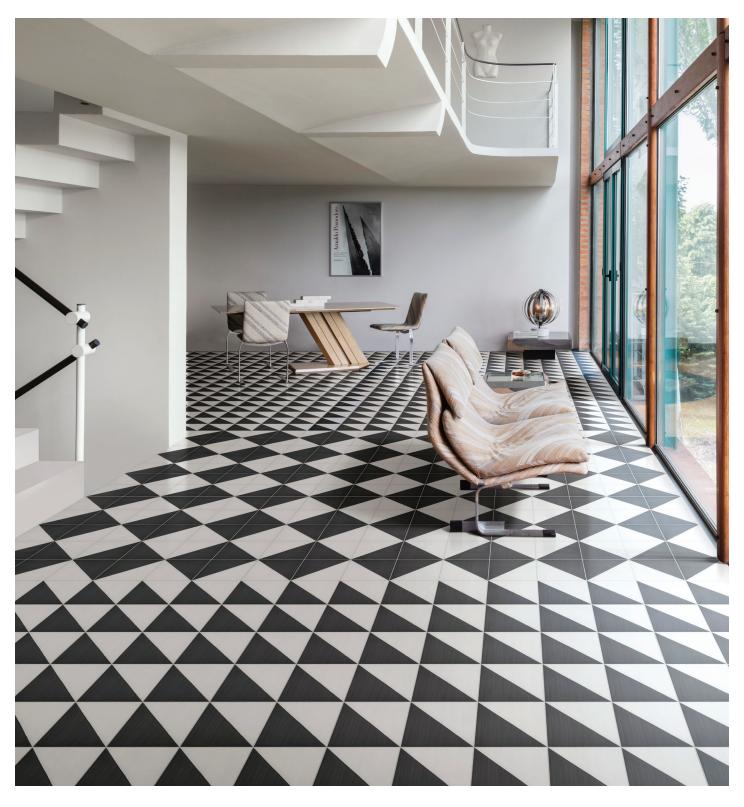









AVAILABLE COLORS & FINISHES

FLOOR TILE



SR20 Bianco (4 pieces)



SR21 Blu (4 pieces)



SR22 Nero (4 pieces)


DECO TILE



SR23 Blu Triangle (4 Pieces)




SR24 Blu Convex (4 Pieces)




SR25 Blu Crescent (4 Pieces)



SR26 Nero Triangle (4 Pieces)



SR27 Nero Convex (4 Pieces)



SR28 Nero Crescent (4 Pieces)















SIMPLICLEAN













SR25 Blu Crescent




SR24 Blu Convex



SR25 Blu Crescent





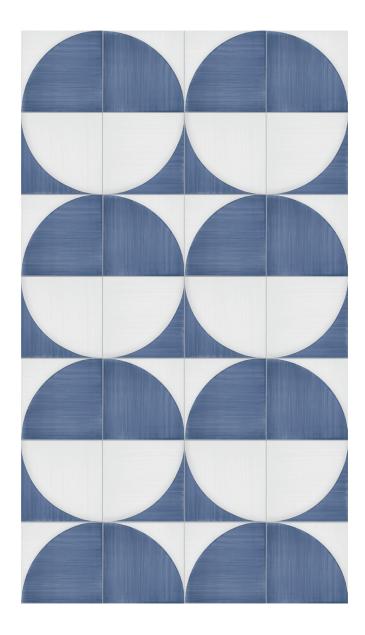








SR25 Blu Crescent


SR24 Blu Convex



SR25 Blu Crescent



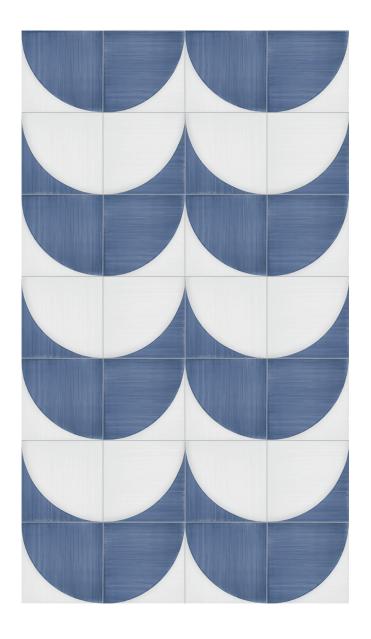

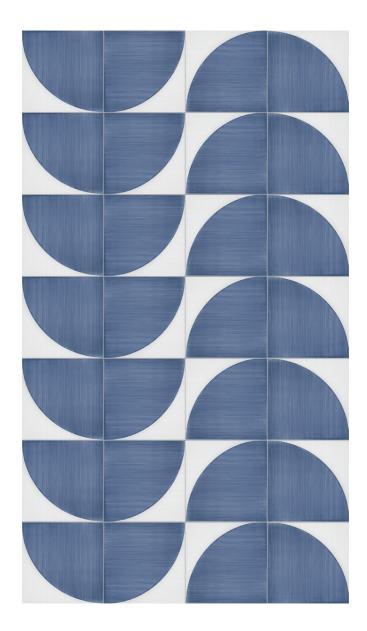







SR25 Blu Crescent




SR24 Blu Convex



SR25 Blu Crescent





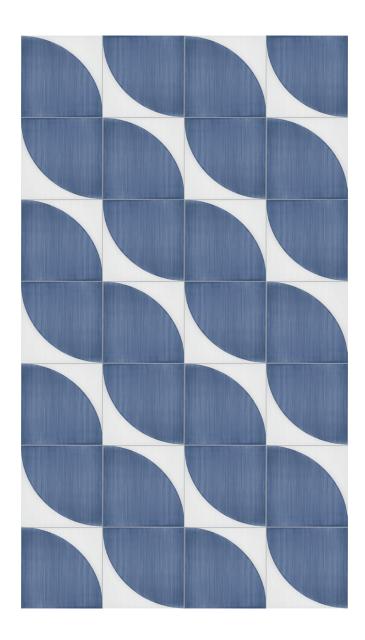








SR25 Blu Crescent



SR24 Blu Convex





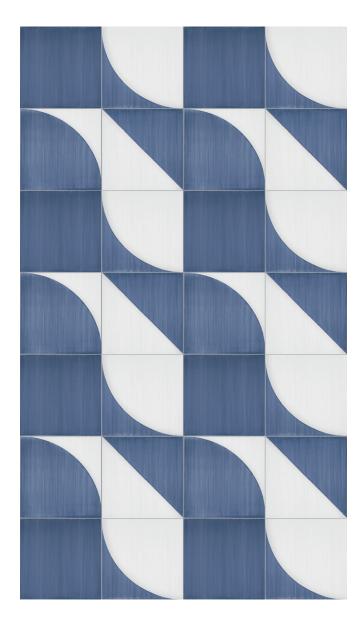













SR24 Blu Convex **SR23** Blu Triangle













SR28 Nero Crescent







SR28 Nero Crescent

SR27 Nero Convex



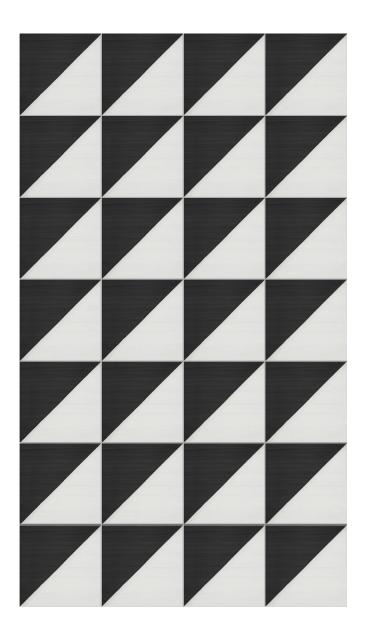

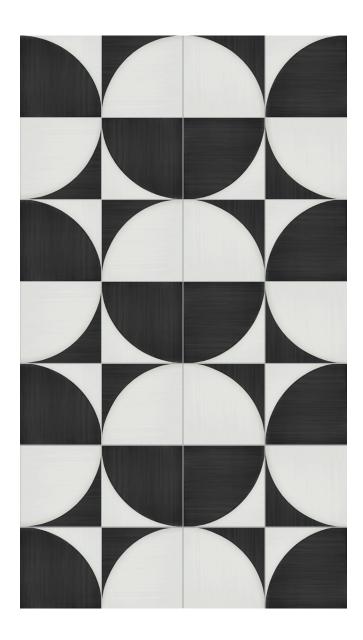



SR26 Nero Triangle




SR28 Nero Crescent



SR27 Nero Convex





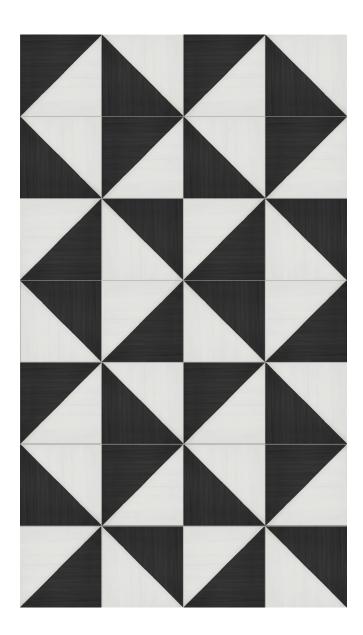




SR26 Nero Triangle



SR26 Nero Triangle



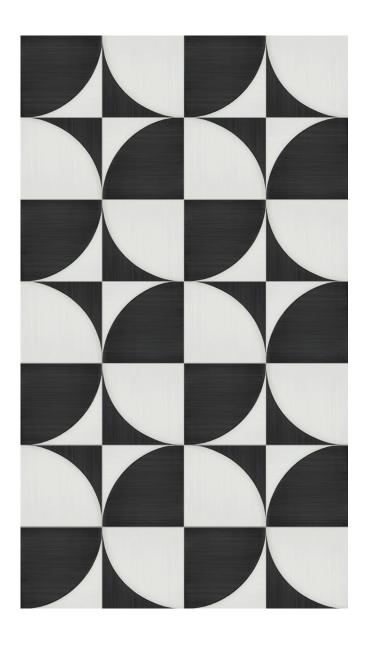












SR27 Nero Convex

SR28 Nero Crescent



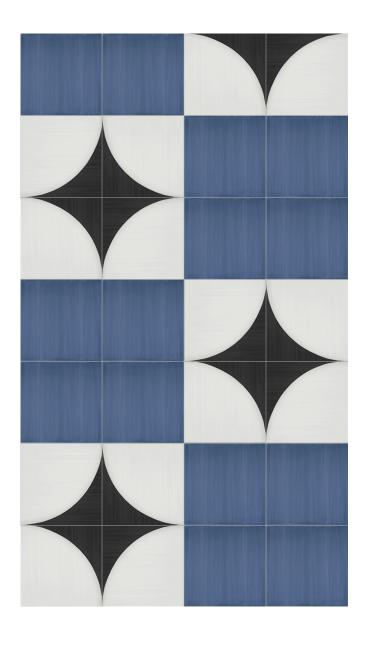











SR26 Nero Triangle



SIZES

		Thickness	Finish
8 x 8 Floor Tile	7-7/8" x 7-7/8" (20.00 cm x 20.00 cm)	3/8"	M
8 x 8 Deco Tile	7-7/8" x 7-7/8" (20.00 cm x 20.00 cm)	3/8"	M



APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Commercial)	≥ 0.42	
	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.60	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTestTM, visit marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation	
3/16"	V2 Medium Variation	

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors.

Use of a latex modified thin-set is recommended for installation. For more information, visit marazzitile.com.

FEATURES



PRE-CONSUMER RECYCLED MATERIALS



REVEAL IMAGING®





All or select items within this series meet the requirements for these qualifications. For more information visit marazzitile.com.