

SLAB

# PUREVANA

MINERAL SURFACES®

WHERE NATURE & DESIGN ALIGN

 daltile®

MARBLE LOOK | STONE LOOK | MONOCHROMATIC LOOK

# WHERE NATURE AND DESIGN ALIGN

Step into a world where the raw beauty of nature meets the precision of modern design with Purevana. A revolutionary new countertop surface created with nature's most elite minerals, Purevana is more than just a surface; it's a statement of luxury, authenticity, and craftsmanship.

## THE ESSENCE & ART OF PUREVANA:

In a world increasingly dominated by additives, Purevana brings you back to the roots of simplicity. Crafted from an exclusive formula of elite minerals, our countertops reflect the pure, untouched essence of the earth. We believe in celebrating the imperfections found within landscapes from which our minerals are sourced. In nature, perfection is found in imperfection. Our surfaces celebrate these natural imperfections, creating a canvas that is both dynamic and timeless. The artisanal craftsmanship behind Purevana ensures that every slab design is a work of art, bringing the serene chaos of nature into your space.

## LOW CRYSTALLINE SILICA CONTENT:

**FORMULA X5**  
< 5% Crystalline Silica

Our groundbreaking FormulaX™ Technology delivers an unparalleled product with low crystalline silica content. Purevana Mineral Surfaces are meticulously crafted to contain less than 5% crystalline silica, with some formulations achieving zero detectable crystalline silica levels.



- SLAB
- USAGE
  - FLOOR
  - WALL
  - COUNTERTOP
  - SHOWER FLOOR
  - EXTERIOR
- SPECIAL FEATURES
  - STEPWISE™
  - TRU-EDGE™
  - MADE IN THE USA WITH IMPORTED MATERIAL
  - LARGE FORMAT
  - MOSAIC/DECO
  - ENCAUSTIC
  - TERRAZZO
  - PAVER
  - CUSTOMIZE
  - FLEXFIT™
- M (Metric)
- LOW HIGH
- SEE CHARTS FOR FULL PRODUCT DETAILS

Cover Photo features Calacatta Joule on the countertop and Cohesion™ Black 24 x 24 on the floor. Above Photo features Candela on the countertop and Indoterra™ Trail 24 x 48 on the floor.

Photo features Elemis on the countertop and Volume 1.0" 12 x 24 on the floor.



	PRICE	STYLE	RESISTANCE				SEALING REQUIRED	MAINTENANCE	PROS
			CHIPS	HEAT	STAIN	SCRATCHES			
<b>PUREVANA MINERAL SURFACES®</b>	\$\$\$	...	...	...	...	...	NO	NO	Minimal crystalline silica composition Exceptional stain resistance Manufactured for a consistent look Perfect for undermount sink installations

... EXCELLENT  
 .. GOOD  
 • FAIR



# MARBLE LOOK

Photo features Calacatta Joule on the countertop & backsplash and Ravel™ Caviar 32 x 32 on the floor.

MARBLE LOOK



MOKARA LQ02



CANDELA LQ03




CALACATTA JOULE LQ05



# STONE LOOK

Photo features Elemis on the countertop.

**STONE LOOK**

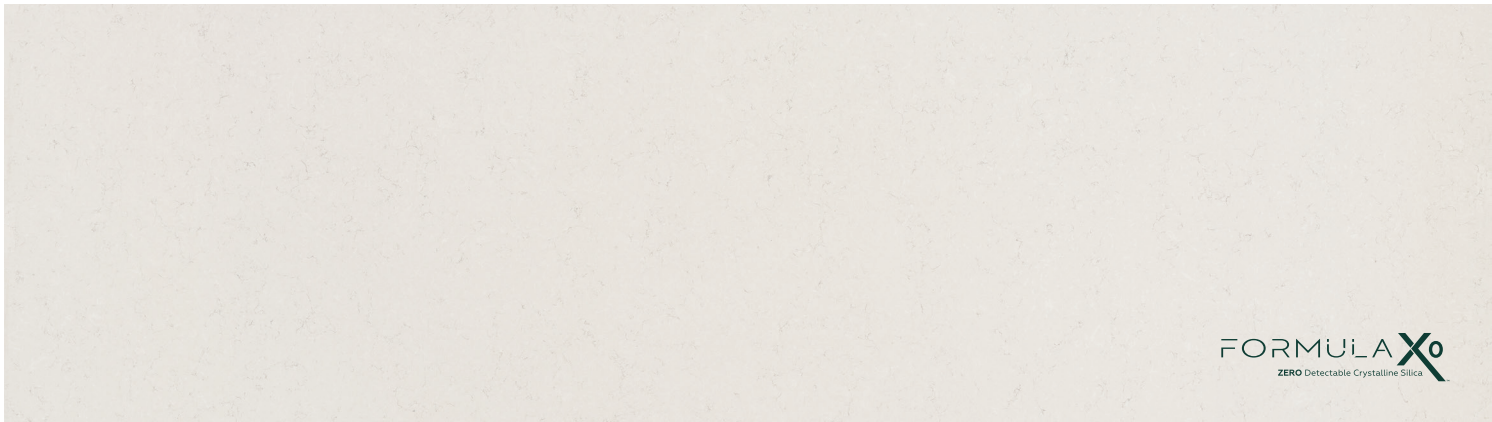

FORMULA **X<sub>0</sub>**  
ZERO Detectable Crystalline Silica

ELEMIS LQ01



# MONOCHROMATIC LOOK

Photo features Morning Zen on the countertop with Panoramic Porcelain Surfaces™ Chromium 63 x 126 on the right wall and Rekindle™ Light Gray 12 x 24 on the floor.



FORMULA X5  
◀ 5% Crystalline Silica



MORNING ZEN LQ04

**PRODUCT INFORMATION**

Finishes	Nominal Size	Thickness
Polished	136" x 79"	2 cm & 3 cm

Custom slab finishes in polished, honed, leather or lava are available by special order. Not all colors available in alternative finishes. Please contact your local slab center for availability.

**INSTALLATION**

Shade Variation	
LQ04:	 Low (V1)
LQ01, LQ02, LQ03, LQ05:	 Medium (V2)

**NOTES**

Purevana Mineral Surfaces products are nonporous, reducing the potential for bacteria growth, resist common food stains and are stronger than natural granite.

Purevana Mineral Surfaces products are virtually maintenance free.

Purevana Mineral Surfaces products contain natural quartz stone providing consistent color and visual movement. A wide range of color options allow for more design freedom.

Purevana Mineral Surfaces products have a durable, scratch-resistant surface.

Purevana Mineral Surfaces products are heat and scorch-resistant under normal cooking conditions (use of a trivet is recommended for longer or extreme heat exposure).

Twenty-Five year Commercial Limited Warranty. Visit [daltile.com/countertops-product-category/purevana](http://daltile.com/countertops-product-category/purevana) for details.

Lifetime Residential Limited Warranty. Visit [daltile.com/countertops-product-category/purevana](http://daltile.com/countertops-product-category/purevana) for details.

**WARNING:** This product can expose you to chemicals known to the State of California to cause cancer, including crystalline Silica (airborne particles of respirable size) in dust created if the product is dry cut/ground/polished or pulverized during fabrication/installation/removal. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

For information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).

**Please review the safety data sheet for important safety information and always adhere to local OSHA guidelines for proper countertop material fabrication methods.**

**APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

Purevana Mineral Surfaces do not meet minimum coefficient of friction thresholds recommended by safety standard-setting organizations. Water, oil, grease, etc., create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

**APPLICATION NOTES:**

Purevana Mineral Surfaces are not suitable for exterior applications due to small resin content. The sun will etch the material.

**SLAB PERFORMANCE CHARACTERISTICS**

	Test Method	Average Result*
Abrasion Wear Index	ASTM C501	≥ 135
Bulk Specific Gravity	ASTM C97	≤ 2500 kg / cubic meter
Chemical Resistance	ASTM C650	Resistant to typical household cleaners
Coefficient of Thermal Expansion	ASTM C531	≤ 4.0 • 10 <sup>-5</sup> °C <sup>-1</sup>
Flexural Strength	ASTM C880	≥ 35 MPa
Water Absorption	ASTM C97	≤ 0.10%
Scratch Resistance (Mohs Hardness)	ASTM C1895	≥ 5
Stain Resistance	ANSI Z124.6	Pass
Thermal Shock Resistance	ASTM C484	Pass – No Effect

\* Custom testing results by color are available upon request.



Twenty Five Year Commercial Limited Warranty, visit [daltile.com](http://daltile.com) for complete warranty details.



Lifetime Residential Limited Warranty, visit [daltile.com](http://daltile.com) for complete warranty details.\*



MADE IN THE USA WITH IMPORTED MATERIAL.



To See Approved Colors Made In The USA With Imported Material, Please Check The Below Link:

[info.nsf.org/Certified/Food/Listings.asp?Company=C0536133&Standard=051](http://info.nsf.org/Certified/Food/Listings.asp?Company=C0536133&Standard=051)



To See Approved Colors Made In The USA With Imported Material, Please Check The Below Link:

<https://spot.ul.com/main-app/products/catalog/?keywords=Purevana+Mineral+Surfaces>

\*Made in the USA with imported material.

7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



©2024 Dal-Tile, LLC (09/24)