


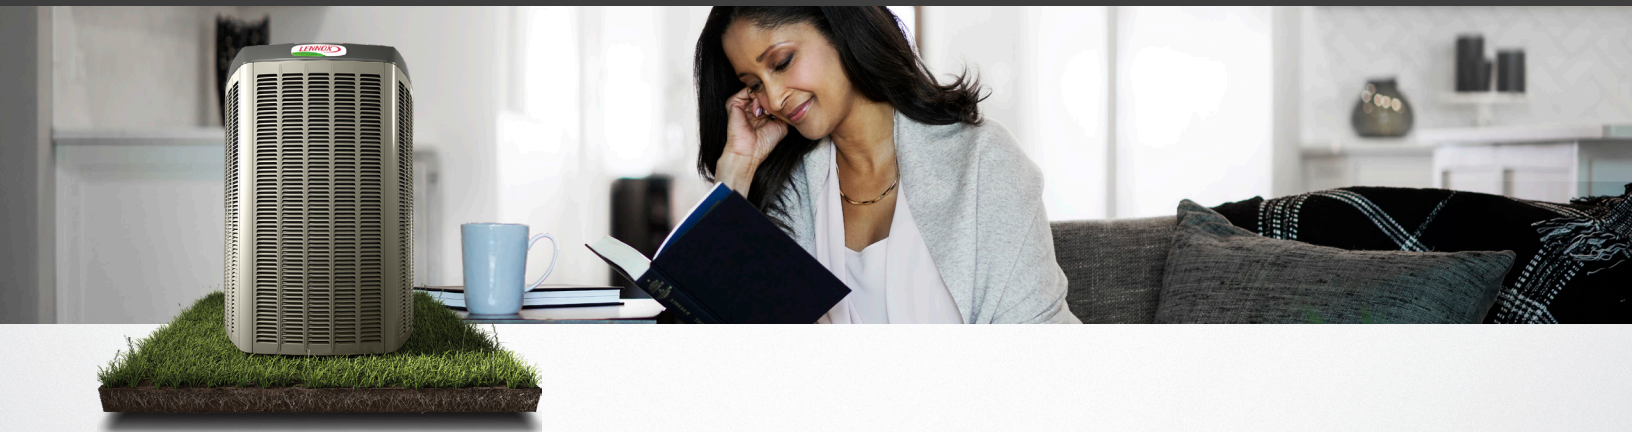

SL28XCV

Order No.	Model No.	Tons	SEER2 (Up To)	H x W x D
Variable-Capacity Cooling - R-410A - Quantum™ Aluminum Coil - Lennox® Communicating Control - DC Inverter Control				
19U50	SL28XCV-024-230	2	25.80	47 x 35.5 x 39.5
19U51	SL28XCV-036-230	3	23.20	47 x 35.5 x 39.5
19U52	SL28XCV-048-230	4	22.20	47 x 35.5 x 39.5
19U53	SL28XCV-060-230	5	21.40	47 x 35.5 x 39.5

NOTE - A Lennox® Communicating Thermostat (S40 or S30) and a variable-speed Lennox® Communicating Furnace or Air Handler is required with the SL28XCV for a complete communicating system. All components must be ordered separately.

XC21

Order No.	Model No.	Tons	SEER2 (Up To)	H x W x D
Two-Stage Cooling - R-410A - Lennox® Communicating Control				
50W34	XC21-024-230	2	19.20	47 x 35.5 x 39.5
50W35	XC21-036-230	3	18.80	47 x 35.5 x 39.5
50W36	XC21-048-230	4	17.40	47 x 35.5 x 39.5
50W37	XC21-060-230	5	16.00	47 x 35.5 x 39.5