

LENNOX Air is life. Make it perfect.™

A versatile and energy-saving solution.



Mini-Split Systems

Lennox Powered by Samsung unites two trusted brands known for quality, reliability and innovative technology. Our ductless mini-split systems are an easy, energy-efficient solution that deliver room-to-room comfort and peace of mind.

Why choose a Lennox mini-split system?



VARIABLE CAPACITY, CONSTANT EFFICIENCY

Variable-capacity operation adjusts heating and cooling output like a dimmer switch to perfectly match your comfort needs to your energy use.



USE LESS ENERGY. SAVE MORE MONEY.

With high-efficiency models of up to 25.00 SEER2 and 11.00 HSPF2, and standard-efficiency models of up to 25.00 SEER2 and 10.00 HSPF2, a mini-split can deliver significant energy savings. In fact, it can help cut your energy bills by several hundred dollars per year.



ENERGY STAR® CERTIFIED

HVAC equipment with the ENERGY STAR label meets or exceeds federal guidelines for energy-efficient performance.



MAXIMUM COMFORT. MINIMUM NOISE.

The compact footprint of mini-splits delivers quiet comfort, making them ideal for areas where noise restrictions are present. Our outdoor units operate as low as 45 dB, or the sound of a refrigerator.



COMPLETE CONTROL AT HOME OR AWAY

Through the SmartThings app, you can operate and monitor your unit from almost anywhere, anytime.



PEACE-OF-MIND PROTECTION

Many Lennox mini-split systems come with 12-year limited extended warranty coverage with product registration.

How a mini-split system works

Easy to install, a mini-split system is comprised of a compact indoor and outdoor unit connected through the wall.

Warm Weather


In warm weather, the system removes heat from inside your home and expels it outside.

Cold Weather

During cold weather, the system pulls in heat from outside and emits it into your home.

Extreme Weather



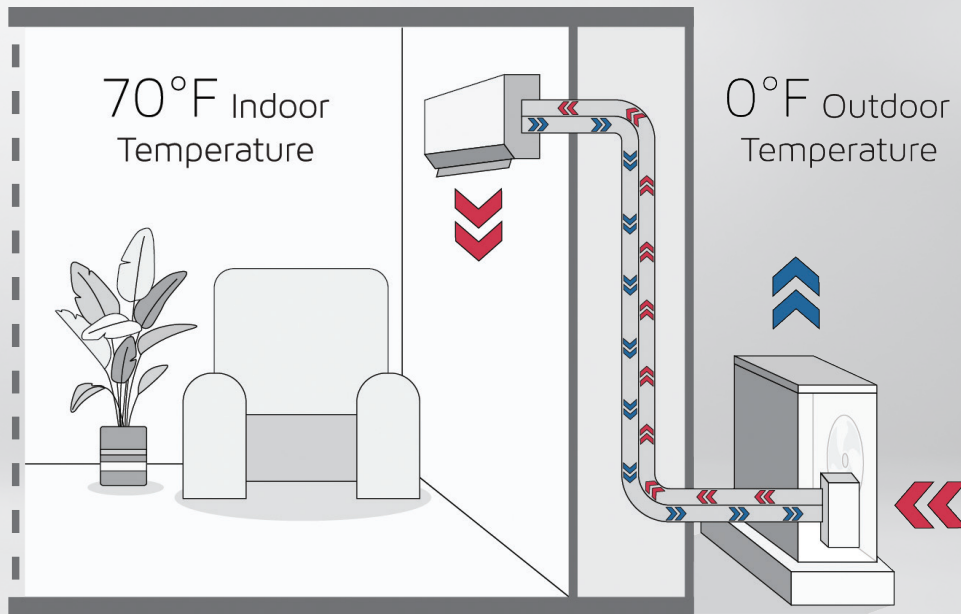



















An MWLD mini-split heat pump can maintain 100% capacity at -4°F and can operate at temperatures as low as -22°F



Traditional mini-split systems are ideal for:

- Older homes with no central air or ductwork
- Add-on rooms, sunrooms and outbuildings
- Rooms that are not regularly used
- Areas adjacent to unconditioned spaces
- Homes with costly electric heating that would benefit from cooling

Lennox® mini-split system equipment and accessories.

	MMLD/MMPD Mini-Split Heat Pump Multi-Zone	MMLD Mini-Split Heat Pump Single Zone	MMPD Mini-Split Heat Pump Single Zone	MWLD/MWPD Mini-Split Heat Pump Single Zone	MWHD Mini-Split Heat Pump Single Zone
Outdoor Unit					
Wall Mount Indoor Unit	 MWZD Wall Mount Mini-Split Air Handler			 MWMD Wall Mount Mini-Split Air Handler	 MWHD Wall Mount Mini-Split Air Handler
Ducted Air Handler Indoor Unit	 MDDD High-Static Ducted Air Handler	 MDDD High-Static Ducted Air Handler	 MDDD High-Static Ducted Air Handler		
	 MMDD Medium-Static Ducted Air Handler	 MMDD Medium-Static Ducted Air Handler			
	 MMD Multi-Position Ducted Air Handler	 MMD Multi-Position Ducted Air Handler	 MMD Multi-Position Ducted Air Handler		
Floor Mount Indoor Unit	 MFMD Floor Mount	 MFMD Floor Mount			
Ceiling Cassette Indoor Unit	 M22D Ceiling Cassette	 M22D/M33D Ceiling Cassette	 M33D Ceiling Cassette		
	 M1WD Ceiling Cassette	 M1WD Ceiling Cassette			

CONTROLLERS


Wireless Remote

 Furnished with wall mount and floor mount indoor units

Wired Non-Programmable

 Optional

Wired Programmable

 Optional



www.lennox.com 1-800-9-LENNOX

For a complete list of the registered and common law trademarks owned by Lennox Industries Inc., please visit www.lennox.com.

©2025 Lennox Industries Inc. 19LNX0076 03/25 (38C42)



009-012

(SHOWN)

35" X 11-3/4"

(889 X 298 mm)

.....

015-018-024

41-1/2" X 11-3/4"

(1054 X 298 mm)

.....



