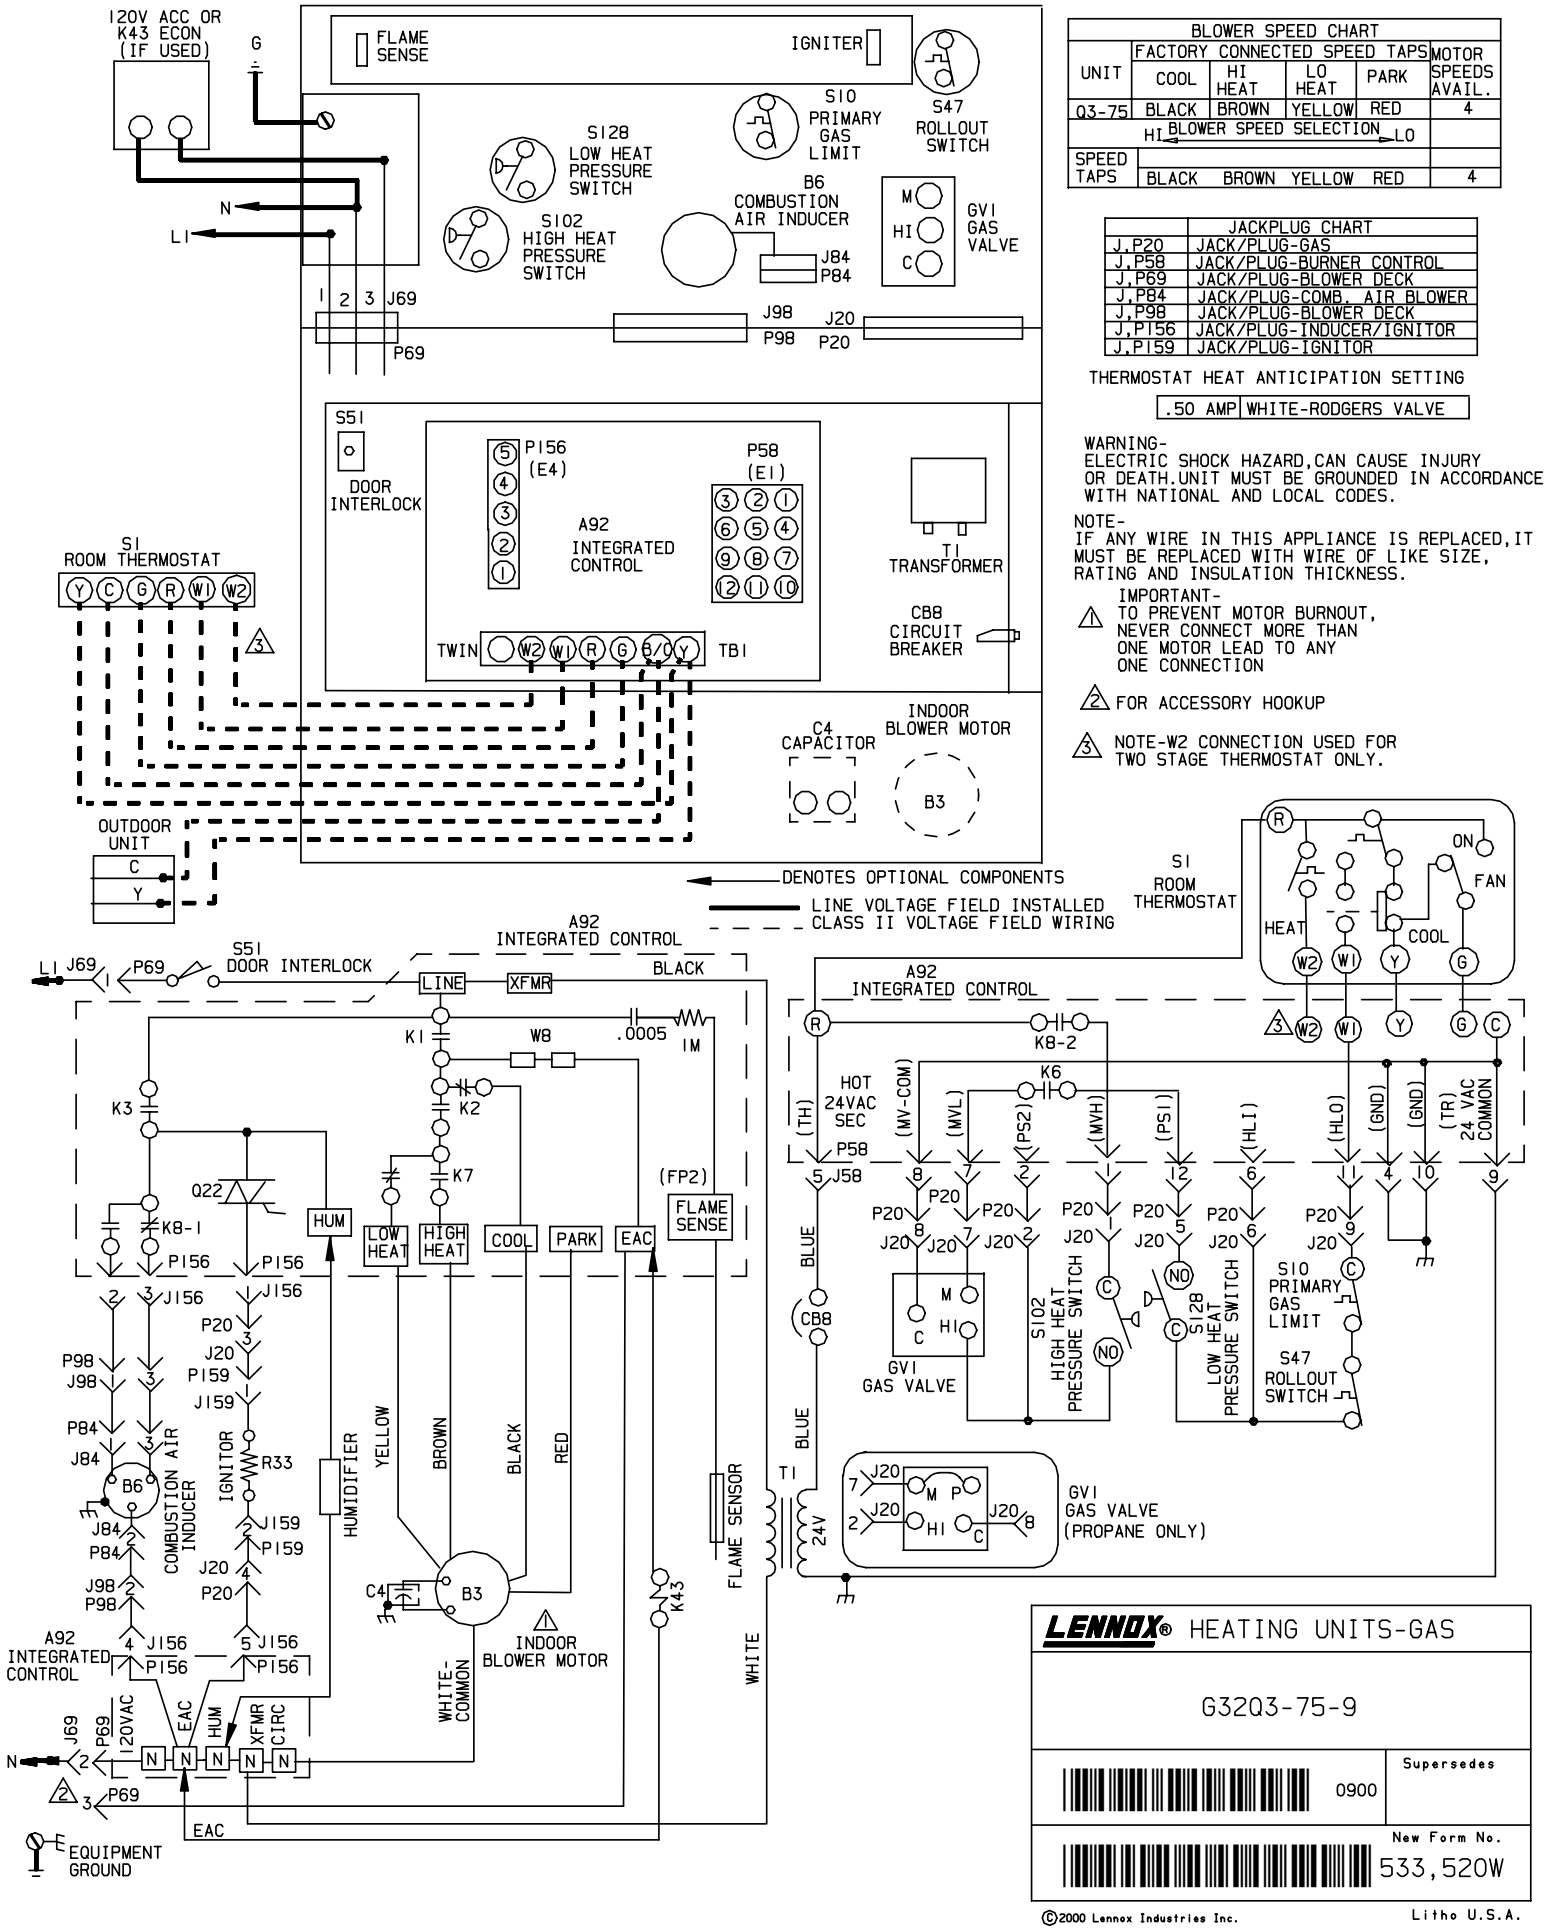


BLOWER SPEED CHART					
UNIT	FACTORY CONNECTED SPEED TAPS				MOTOR SPEEDS AVAIL.
	COOL	HI HEAT	LO HEAT	PARK	
Q3-75	BLACK	BROWN	YELLOW	RED	4
HI ◄ BLOWER SPEED SELECTION ► LO					
SPEED TAPS	BLACK	BROWN	YELLOW	RED	4

JACKPLUG CHART	
J,P20	JACK/PLUG-GAS
J,P58	JACK/PLUG-BURNER CONTROL
J,P69	JACK/PLUG-BLOWER DECK
J,P84	JACK/PLUG-COMB. AIR BLOWER
J,P98	JACK/PLUG-BLOWER DECK
J,P156	JACK/PLUG-INDUCER/IGNITOR
J,P159	JACK/PLUG-IGNITOR

THERMOSTAT HEAT ANTICIPATION SETTING

.50 AMP	WHITE-RODGERS VALVE

WARNING-
ELECTRIC SHOCK HAZARD, CAN CAUSE INJURY OR DEATH. UNIT MUST BE GROUNDED IN ACCORDANCE WITH NATIONAL AND LOCAL CODES.

NOTE-
IF ANY WIRE IN THIS APPLIANCE IS REPLACED, IT MUST BE REPLACED WITH WIRE OF LIKE SIZE, RATING AND INSULATION THICKNESS.

⚠1 IMPORTANT-
TO PREVENT MOTOR BURNOUT, NEVER CONNECT MORE THAN ONE MOTOR LEAD TO ANY ONE CONNECTION

⚠2 FOR ACCESSORY HOOKUP

⚠3 NOTE-W2 CONNECTION USED FOR TWO STAGE THERMOSTAT ONLY.

LENNOX® HEATING UNITS-GAS

G32Q3-75-9

0900

Supersedes

New Form No. 533,520W

©2000 Lennox Industries Inc.

Litho U.S.A.