

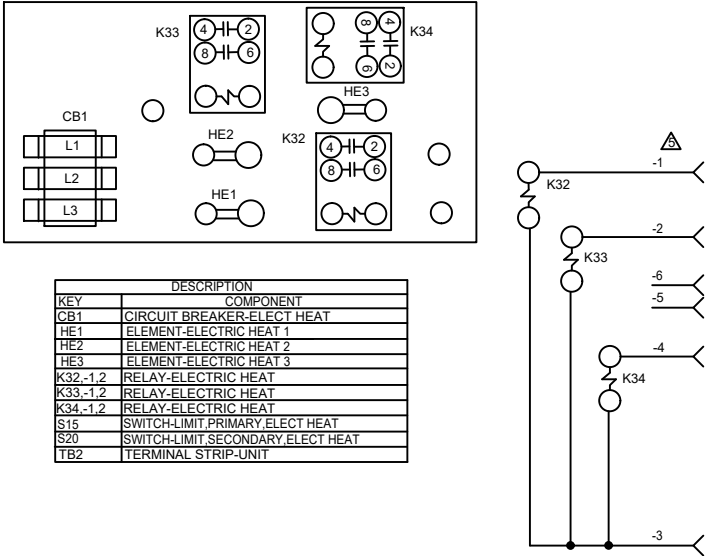


CUT SIZE: 4-3/4" W x 7-1/2" H

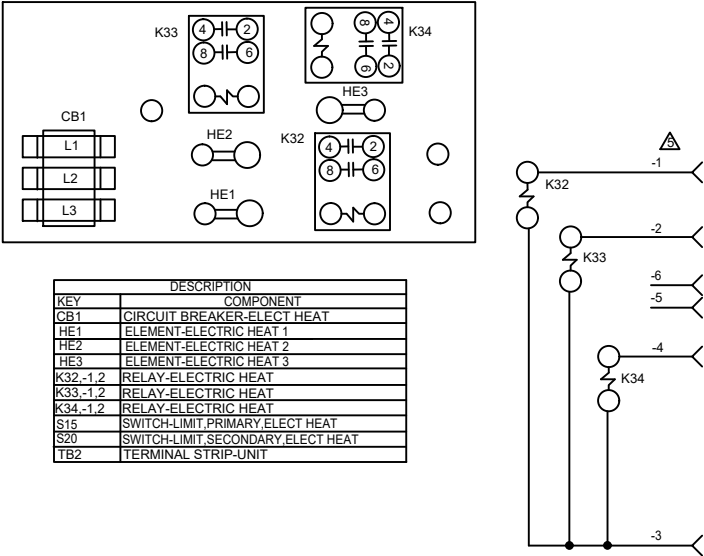

NOTE: USE COPPER CONDUCTORS ONLY

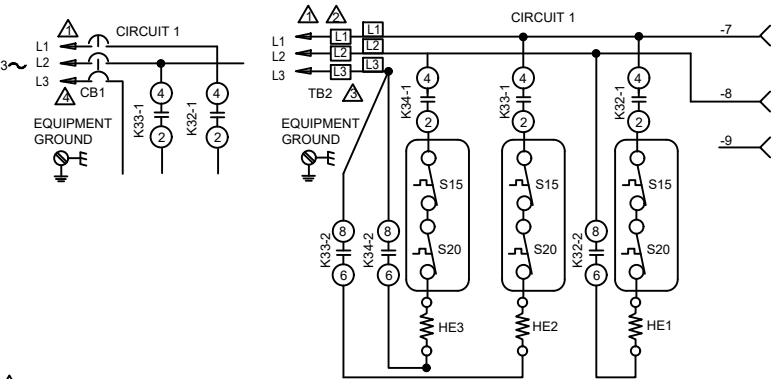


- REFER TO UNIT NAMEPLATE FOR MINIMUM CIRCUIT AMPACITY AND MAXIMUM OVERCURRENT PROTECTION SIZE.
- CONNECT POWER WIRES FROM HEATER, LABELED L1, L2, L3 TO TB2 TERMINAL STRIP INSIDE INDOOR UNIT.
- TB2 USED ON 8 AND 10KW HEATERS ONLY
- CB1 USED ON 15KW HEATER ONLY
- CONNECT WIRES 1 THRU 9 TO P8 (9 PIN CONNECTOR) ON AHC CONTROL

ECB48-8,10,15CB-Y	
Supersedes	
10/25	Form No. 538467-01

© 2008

Litho U.S.A.

NOTE: USE COPPER CONDUCTORS ONLY

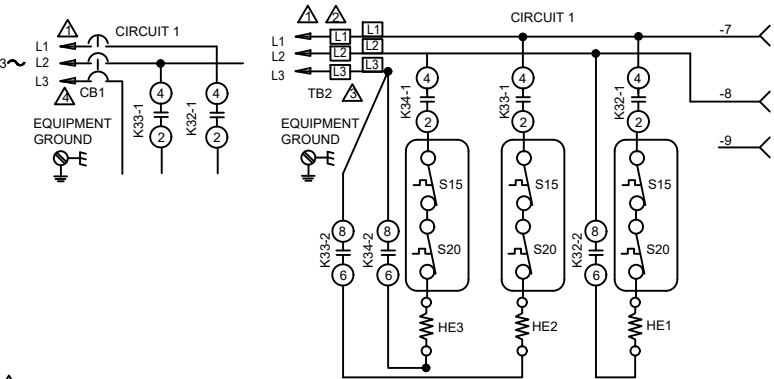

- REFER TO UNIT NAMEPLATE FOR MINIMUM CIRCUIT AMPACITY AND MAXIMUM OVERCURRENT PROTECTION SIZE.
- CONNECT POWER WIRES FROM HEATER, LABELED L1, L2, L3 TO TB2 TERMINAL STRIP INSIDE INDOOR UNIT.
- TB2 USED ON 8 AND 10KW HEATERS ONLY
- CB1 USED ON 15KW HEATER ONLY
- CONNECT WIRES 1 THRU 9 TO P8 (9 PIN CONNECTOR) ON AHC CONTROL

ECB48-8,10,15CB-Y	
Supersedes	
10/25	Form No. 538467-01

© 2008

Litho U.S.A.