




**RESIDENTIAL  
PRODUCT SPECIFICATIONS**

**INDOOR COILS  
CX35**


**Upflow - Cased - TXV - R-410A**

Bulletin No. 210879  
November 2018  
Supersedes Bulletin No. 210668

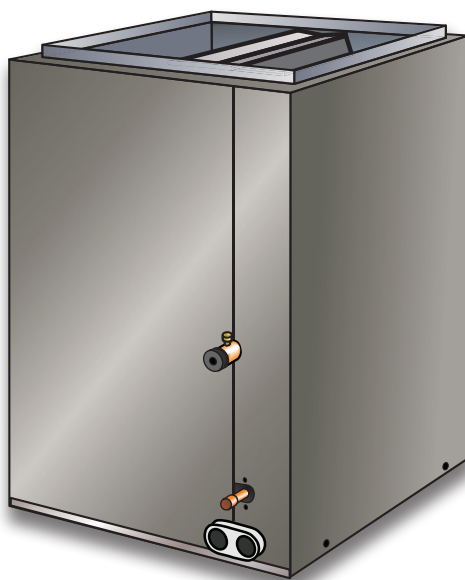

**1.5 to 5 Tons**

**MODEL NUMBER IDENTIFICATION**

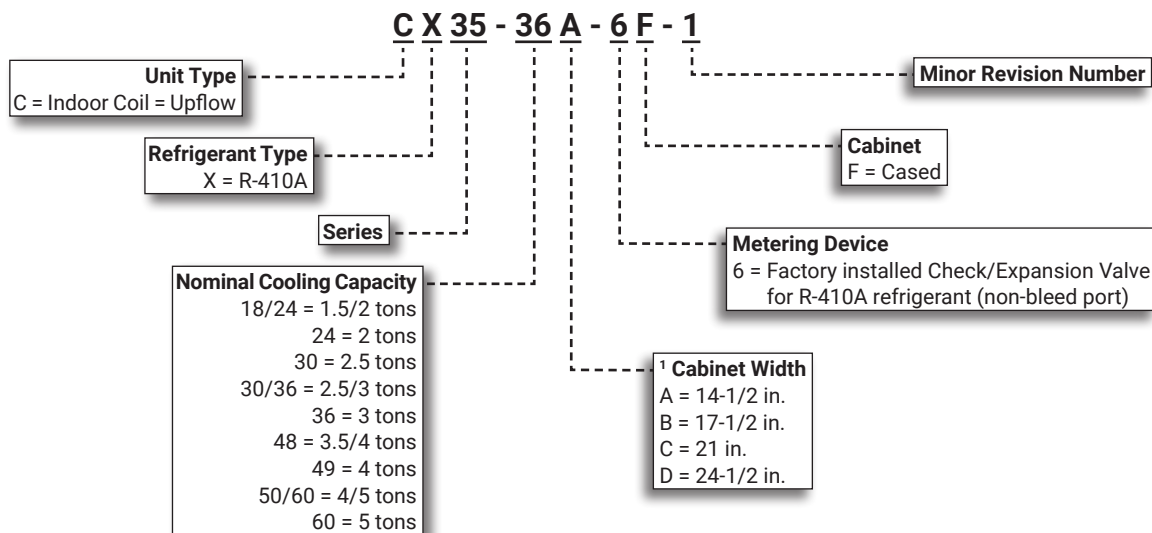

<sup>2</sup> Furnaces with the same letter designation physically match the indoor coil.

## CONTENTS

|                                       |   |
|---------------------------------------|---|
| Air Resistance . . . . .              | 4 |
| Approvals And Warranty . . . . .      | 2 |
| Contents . . . . .                    | 2 |
| CX34 To CX35 Cross-Reference. . . . . | 8 |
| Dimensions . . . . .                  | 5 |
| Features . . . . .                    | 2 |
| Model Number Identification. . . . .  | 1 |
| Specifications . . . . .              | 3 |

## APPROVALS AND WARRANTY

### APPROVALS

- Tested with matching air conditioners and heat pump units in the Lennox Research Laboratory environmental test room in accordance with AHRI Standard 210/240
- AHRI Certified system match-ups and expanded ratings, visit [www.LennoxPros.com](http://www.LennoxPros.com)
- Air resistance tests from Lennox Laboratory air test chamber

### WARRANTY

- All other covered components:
  - Limited five years in residential installations
  - Limited one year in non-residential installations

**NOTE** - Refer to Lennox Equipment Limited Warranty certificate included with unit for specific details.

## FEATURES

### APPLICATIONS

- 1.5 to 5 ton nominal sizes
- Lennox designed upflow cased indoor coils can easily be installed with most Lennox upflow furnaces
- Factory installed R-410A, check/expansion valve

### COIL CONSTRUCTION

#### **Quantum™ Coil**

- Lennox designed and fabricated coil
- Aluminum tubing, hairpins, distributor and header tubes
- Copper refrigerant sweat connections on both liquid and suction lines for easy brazing
- Ripple-edged aluminum fins
- Lanced fins provide maximum exposure of fin surface to air stream
- Rifled tubing provides superior refrigerant heat transfer
- Twin coil construction assembled in an "A" configuration for large surface area
- Non-corrosive, UV-resistant polymer drain pan with dual fpt drain connections
- High pressure testing insures leakproof construction

#### **Check/Expansion Valve**

- All models have a factory-installed, internal check/expansion valve
- For use with R-410A systems
- Wide range valve
- Chatleff style fitting
- Expansion valves are externally-equalized, non-bleed port type

### CABINET

- Pre-painted heavy gauge steel
- Insulated with thick fiberglass insulation
- Flanges provided in outlet for ease of duct connection
- Removable panels provide access to coil

#### **Furnace Match-Up**

- Coils exactly match corresponding furnaces with same letter designation in model number
- No adaptor required.
- Engaging holes furnished on cabinet for alignment with furnace

| SPECIFICATIONS                     |                              | 1.5 TO 2 TON   |                |             |             |
|------------------------------------|------------------------------|----------------|----------------|-------------|-------------|
| General Data                       | Model No.                    | CX35-18/24A-6F | CX35-18/24B-6F | CX35-24A-6F | CX35-24B-6F |
|                                    | Nominal size - Tons          | 1.5 / 2        | 1.5 / 2        | 2           | 2           |
| Line                               | Suction / vapor o.d. - sweat | 3/4            | 3/4            | 3/4         | 3/4         |
| Connections                        | Liquid o.d. - sweat          | 3/8            | 3/8            | 3/8         | 3/8         |
| in.                                | Condensate drain (fpt)       | (2) 3/4        | (2) 3/4        | (2) 3/4     | (2) 3/4     |
| Indoor                             | Net face area sq. ft.        | 3.11           | 3.11           | 3.55        | 3.55        |
| Coil                               | Tube diameter - in.          | 3/8            | 3/8            | 3/8         | 3/8         |
|                                    | Number of rows               | 2              | 2              | 3           | 3           |
|                                    | Fins per inch                | 18             | 18             | 14          | 14          |
| Matching Lennox Furnace Width      |                              | A              | B              | A           | B           |
| Coil & Furnace Cabinet Width - in. |                              | 14-1/2         | 17-1/2         | 14-1/2      | 17-1/2      |
| Shipping Data - lbs.               |                              | 30             | 34             | 38          | 43          |

| SPECIFICATIONS                     |                              | 2.5 TO 3 TON |             |                |                |
|------------------------------------|------------------------------|--------------|-------------|----------------|----------------|
| General Data                       | Model No.                    | CX35-30A-6F  | CX35-30B-6F | CX35-30/36A-6F | CX35-30/36B-6F |
|                                    | Nominal size - Tons          | 2.5          | 2.5         | 2.5 / 3        | 2.5 / 3        |
| Line                               | Suction / vapor o.d. - sweat | 3/4          | 3/4         | 3/4            | 3/4            |
| Connections                        | Liquid o.d. - sweat          | 3/8          | 3/8         | 3/8            | 3/8            |
| in.                                | Condensate drain (fpt)       | (2) 3/4      | (2) 3/4     | (2) 3/4        | (2) 3/4        |
| Indoor                             | Net face area sq. ft.        | 4.44         | 4.44        | 4.89           | 5.77           |
| Coil                               | Tube diameter - in.          | 3/8          | 3/8         | 3/8            | 3/8            |
|                                    | Number of rows               | 3            | 3           | 2              | 2              |
|                                    | Fins per inch                | 13           | 13          | 18             | 18             |
| Matching Lennox Furnace Width      |                              | A            | B           | A              | B              |
| Coil & Furnace Cabinet Width - in. |                              | 14-1/2       | 17-1/2      | 14-1/2         | 17-1/2         |
| Shipping Data - lbs.               |                              | 45           | 50          | 41             | 45             |

| SPECIFICATIONS                     |                              | 2.5 TO 4 TON   |             |             |             |             |
|------------------------------------|------------------------------|----------------|-------------|-------------|-------------|-------------|
| General Data                       | Model No.                    | CX35-30/36C-6F | CX35-36A-6F | CX35-36B-6F | CX35-48B-6F | CX35-48C-6F |
|                                    | Nominal size - Tons          | 2.5 / 3        | 3           | 3           | 3.5 / 4     | 3.5 / 4     |
| Line                               | Suction / vapor o.d. - sweat | 3/4            | 3/4         | 3/4         | 7/8         | 7/8         |
| Connections                        | Liquid o.d. - sweat          | 3/8            | 3/8         | 3/8         | 3/8         | 3/8         |
| in.                                | Condensate drain (fpt)       | (2) 3/4        | (2) 3/4     | (2) 3/4     | (2) 3/4     | (2) 3/4     |
| Indoor                             | Net face area sq. ft.        | 5.77           | 4.89        | 4.89        | 5.77        | 5.77        |
| Coil                               | Tube diameter - in.          | 3/8            | 3/8         | 3/8         | 3/8         | 3/8         |
|                                    | Number of rows               | 2              | 3           | 3           | 3           | 3           |
|                                    | Fins per inch                | 18             | 14          | 14          | 13          | 13          |
| Matching Lennox Furnace Width      |                              | C              | A           | B           | B           | C           |
| Coil & Furnace Cabinet Width - in. |                              | 21             | 14-1/2      | 17-1/2      | 17-1/2      | 21          |
| Shipping Data - lbs.               |                              | 48             | 46          | 50          | 55          | 60          |

| SPECIFICATIONS                     |                              | 4 TO 5 TON  |                |             |             |
|------------------------------------|------------------------------|-------------|----------------|-------------|-------------|
| General Data                       | Model No.                    | CX35-49C-6F | CX35-50/60C-6F | CX35-60C-6F | CX35-60D-6F |
|                                    | Nominal size - Tons          | 4           | 4 / 5          | 5           | 5           |
| Line                               | Suction / vapor o.d. - sweat | 7/8         | 7/8            | 7/8         | 7/8         |
| Connections                        | Liquid o.d. - sweat          | 3/8         | 3/8            | 3/8         | 3/8         |
| in.                                | Condensate drain (fpt)       | (2) 3/4     | (2) 3/4        | (2) 3/4     | (2) 3/4     |
| Indoor                             | Net face area sq. ft.        | 7.0         | 5.78           | 7.50        | 7.58        |
| Coil                               | Tube diameter - in.          | 3/8         | 3/8            | 3/8         | 3/8         |
|                                    | Number of rows               | 3           | 3              | 3           | 3           |
|                                    | Fins per inch                | 15          | 13             | 16          | 14          |
| Matching Lennox Furnace Width      |                              | C           | C              | C           | D           |
| Coil & Furnace Cabinet Width - in. |                              | 21          | 21             | 21          | 24-1/2      |
| Shipping Data - lbs.               |                              | 70          | 60             | 73          | 72          |


## AIR RESISTANCE

| Model No.                                       | Air Volume<br>cfm | Total Resistance |          |
|-------------------------------------------------|-------------------|------------------|----------|
|                                                 |                   | Dry Coil         | Wet Coil |
|                                                 |                   | in. w.g.         | in. w.g. |
| CX35-18/24A-6F                                  | 400               | 0.06             | 0.08     |
| CX35-18/24B-6F                                  | 600               | 0.11             | 0.17     |
|                                                 | 800               | 0.18             | 0.25     |
|                                                 | 1000              | 0.27             | 0.39     |
|                                                 | 1200              | 0.37             | 0.52     |
| CX35-24A-6F                                     | 400               | 0.05             | 0.05     |
|                                                 | 600               | 0.09             | 0.10     |
|                                                 | 800               | 0.16             | 0.18     |
|                                                 | 1000              | 0.23             | 0.26     |
|                                                 | 1200              | 0.32             | 0.36     |
| CX35-24B-6F                                     | 400               | 0.03             | 0.04     |
|                                                 | 600               | 0.07             | 0.09     |
|                                                 | 800               | 0.11             | 0.15     |
|                                                 | 1000              | 0.17             | 0.22     |
|                                                 | 1200              | 0.23             | 0.31     |
| CX35-30A-6F                                     | 600               | 0.07             | 0.08     |
|                                                 | 800               | 0.12             | 0.13     |
|                                                 | 1000              | 0.18             | 0.20     |
|                                                 | 1200              | 0.26             | 0.28     |
|                                                 | 1400              | 0.34             | 0.37     |
| CX35-30B-6F                                     | 600               | 0.06             | 0.06     |
|                                                 | 800               | 0.09             | 0.11     |
|                                                 | 1000              | 0.13             | 0.16     |
|                                                 | 1200              | 0.19             | 0.23     |
|                                                 | 1400              | 0.25             | 0.31     |
| CX35-30/36A-6F                                  | 800               | 0.13             | 0.14     |
|                                                 | 1000              | 0.19             | 0.21     |
|                                                 | 1200              | 0.27             | 0.30     |
|                                                 | 1400              | 0.34             | 0.39     |
|                                                 | 1600              | 0.45             | 0.51     |
| CX35-30/36B-6F<br>CX35-30/36C-6F<br>CX35-36B-6F | 800               | 0.08             | 0.11     |
|                                                 | 1000              | 0.13             | 0.16     |
|                                                 | 1200              | 0.17             | 0.21     |
|                                                 | 1400              | 0.22             | 0.28     |
|                                                 | 1600              | 0.29             | 0.34     |

| Model No.      | Air Volume<br>cfm | Total Resistance |          |
|----------------|-------------------|------------------|----------|
|                |                   | Dry Coil         | Wet Coil |
|                |                   | in. w.g.         | in. w.g. |
| CX35-36A-6F    | 800               | 0.13             | 0.14     |
|                | 1000              | 0.19             | 0.21     |
|                | 1200              | 0.27             | 0.30     |
|                | 1400              | 0.34             | 0.39     |
|                | 1600              | 0.45             | 0.51     |
|                | 1800              | 0.56             | 0.63     |
| CX35-48B-6F    | 1000              | 0.13             | 0.13     |
|                | 1200              | 0.18             | 0.18     |
|                | 1400              | 0.23             | 0.24     |
|                | 1600              | 0.30             | 0.31     |
|                | 1800              | 0.37             | 0.40     |
| CX35-48C-6F    | 1000              | 0.07             | 0.09     |
|                | 1200              | 0.10             | 0.12     |
|                | 1400              | 0.13             | 0.16     |
|                | 1600              | 0.16             | 0.20     |
|                | 1800              | 0.20             | 0.24     |
| CX35-49C-6F    | 1200              | 0.08             | 0.12     |
|                | 1400              | 0.13             | 0.17     |
|                | 1600              | 0.17             | 0.22     |
|                | 1800              | 0.22             | 0.28     |
|                | 2000              | 0.28             | 0.35     |
| CX35-50/60C-6F | 1200              | 0.13             | 0.17     |
|                | 1400              | 0.18             | 0.23     |
|                | 1600              | 0.23             | 0.29     |
|                | 1800              | 0.28             | 0.37     |
|                | 2000              | 0.34             | 0.43     |
| CX35-60D-6F    | 1400              | 0.11             | 0.15     |
|                | 1600              | 0.14             | 0.18     |
|                | 1800              | 0.17             | 0.21     |
|                | 2000              | 0.21             | 0.27     |
|                | 2200              | 0.25             | 0.32     |
|                | 2400              | 0.30             | 0.37     |
| CX35-60C-6F    | 1400              | 0.15             | 0.19     |
|                | 1600              | 0.19             | 0.23     |
|                | 1800              | 0.24             | 0.28     |
|                | 2000              | 0.29             | 0.34     |
|                | 2200              | 0.33             | 0.40     |
|                | 2400              | 0.39             | 0.46     |

## DIMENSIONS

### CX35-18/24(A/B), -30/36(A/B/C) and -36(A/B) Coils

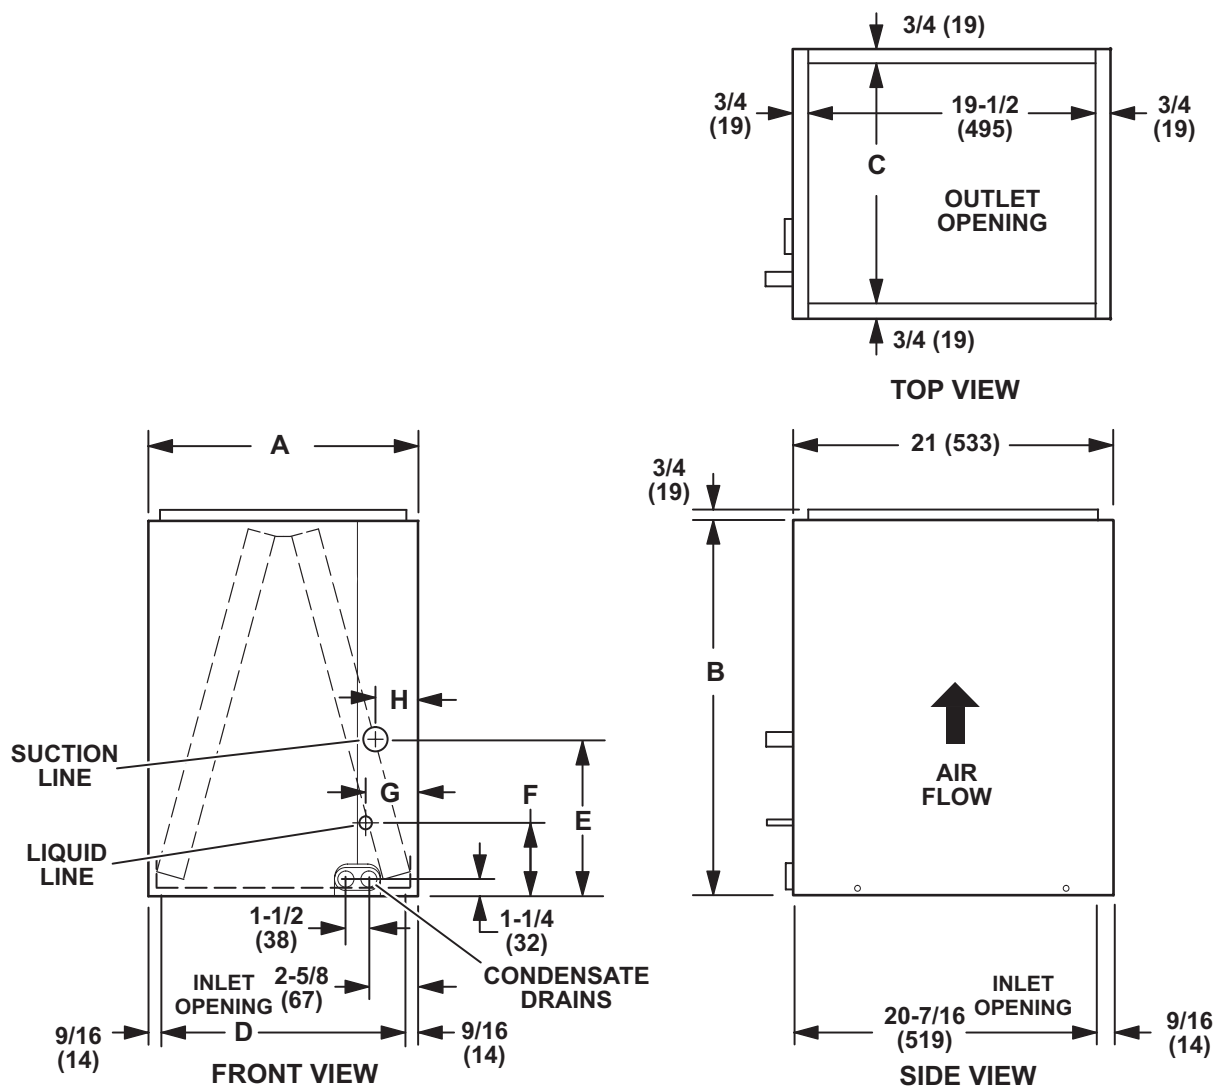


| Model Number   | A      |     | B      |     | C      |     | D      |     | E      |     | F     |    | G     |    | H     |    |
|----------------|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|-------|----|-------|----|-------|----|
|                | in.    | mm  | in.    | mm  | in.    | mm  | in.    | mm  | in.    | mm  | in.   | mm | in.   | mm | in.   | mm |
| CX35-18/24A-6F | 14-1/2 | 368 | 16-1/2 | 419 | 13     | 330 | 13-3/8 | 340 | 7-1/4  | 185 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-18/24B-6F | 17-1/2 | 445 | 16-1/2 | 419 | 16     | 406 | 16-3/8 | 416 | 7-1/4  | 185 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-30/36A-6F | 14-1/2 | 368 | 24-1/2 | 622 | 13     | 330 | 13-3/8 | 340 | 13-1/2 | 343 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-30/36B-6F | 17-1/2 | 445 | 24-1/2 | 622 | 16     | 406 | 16-3/8 | 416 | 13-1/2 | 343 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-30/36C-6F | 21     | 533 | 24-1/2 | 622 | 19-1/2 | 495 | 19-7/8 | 505 | 13-1/2 | 343 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-36A-6F    | 14-1/2 | 368 | 24-1/2 | 622 | 13     | 330 | 13-3/8 | 340 | 13-1/2 | 343 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-36B-6F    | 17-1/2 | 445 | 24-1/2 | 622 | 16     | 406 | 16-3/8 | 416 | 13-1/2 | 343 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |

## DIMENSIONS

**CX35-24(A/B), -30(A/B), -48(B/C), -50/60C and -60D Coils**  
(NOTE - See next page for CX35-49C-6F and CX35-60C-6F Coils)

(NOTE - See next page for CX35-49C-6F and CX35-60C-6F Coils)


**NOTE- CX35-60D coil is positioned in cabinet with coil face running left to right, all other coil sizes are positioned like drawing.**

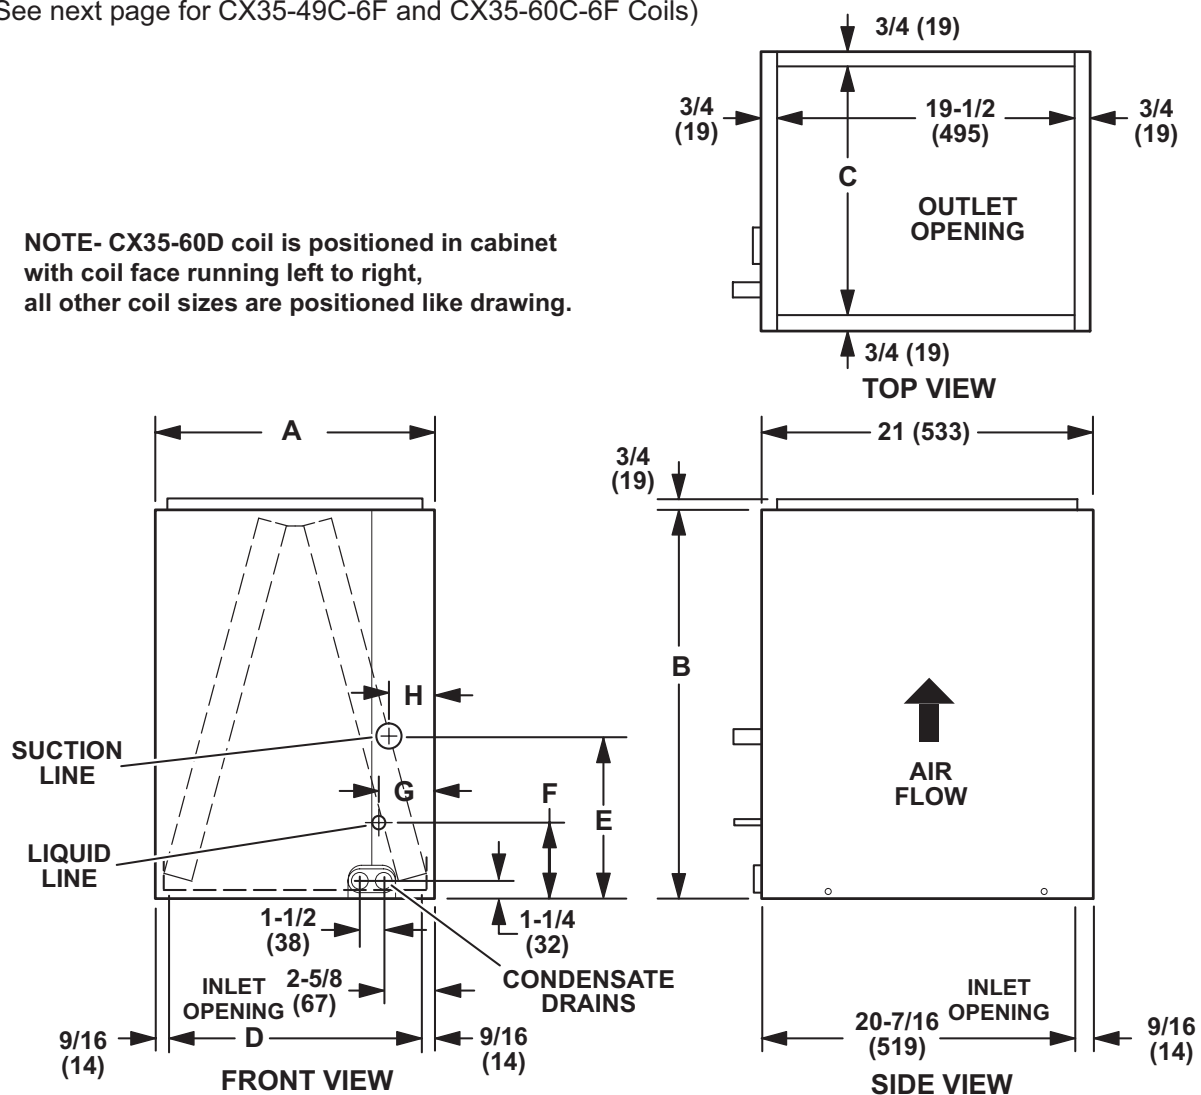

| Model Number   | A      |     | B      |     | C      |     | D      |     | E      |     | F     |    | G     |    | H     |    |
|----------------|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|-------|----|-------|----|-------|----|
|                | in.    | mm  | in.    | mm  | in.    | mm  | in.    | mm  | in.    | mm  | in.   | mm | in.   | mm | in.   | mm |
| CX35-24A-6F    | 14-1/2 | 368 | 18-1/2 | 470 | 13     | 330 | 13-3/8 | 340 | 9-3/4  | 248 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-24B-6F    | 17-1/2 | 445 | 18-1/2 | 470 | 16     | 406 | 16-3/8 | 416 | 9-3/4  | 248 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-30A-6F    | 14-1/2 | 368 | 22-1/2 | 572 | 13     | 330 | 13-3/8 | 340 | 11-1/2 | 292 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-30B-6F    | 17-1/2 | 445 | 22-1/2 | 572 | 16     | 406 | 16-3/8 | 416 | 11-1/2 | 292 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-48B-6F    | 17-1/2 | 445 | 27-1/2 | 699 | 16     | 406 | 16-3/8 | 416 | 12-1/2 | 318 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-48C-6F    | 21     | 533 | 27-1/2 | 699 | 19-1/2 | 495 | 19-7/8 | 505 | 12-1/2 | 318 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-50/60C-6F | 21     | 533 | 27-1/2 | 699 | 19-1/2 | 495 | 19-7/8 | 505 | 12-1/2 | 318 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |
| CX35-60D-6F    | 24-1/2 | 622 | 29-1/2 | 749 | 23     | 584 | 23-3/8 | 594 | 10     | 254 | 3-5/8 | 92 | 2-5/8 | 66 | 2-3/8 | 60 |

## DIMENSIONS

### CX35-49C-6F and CX35-60C-6F

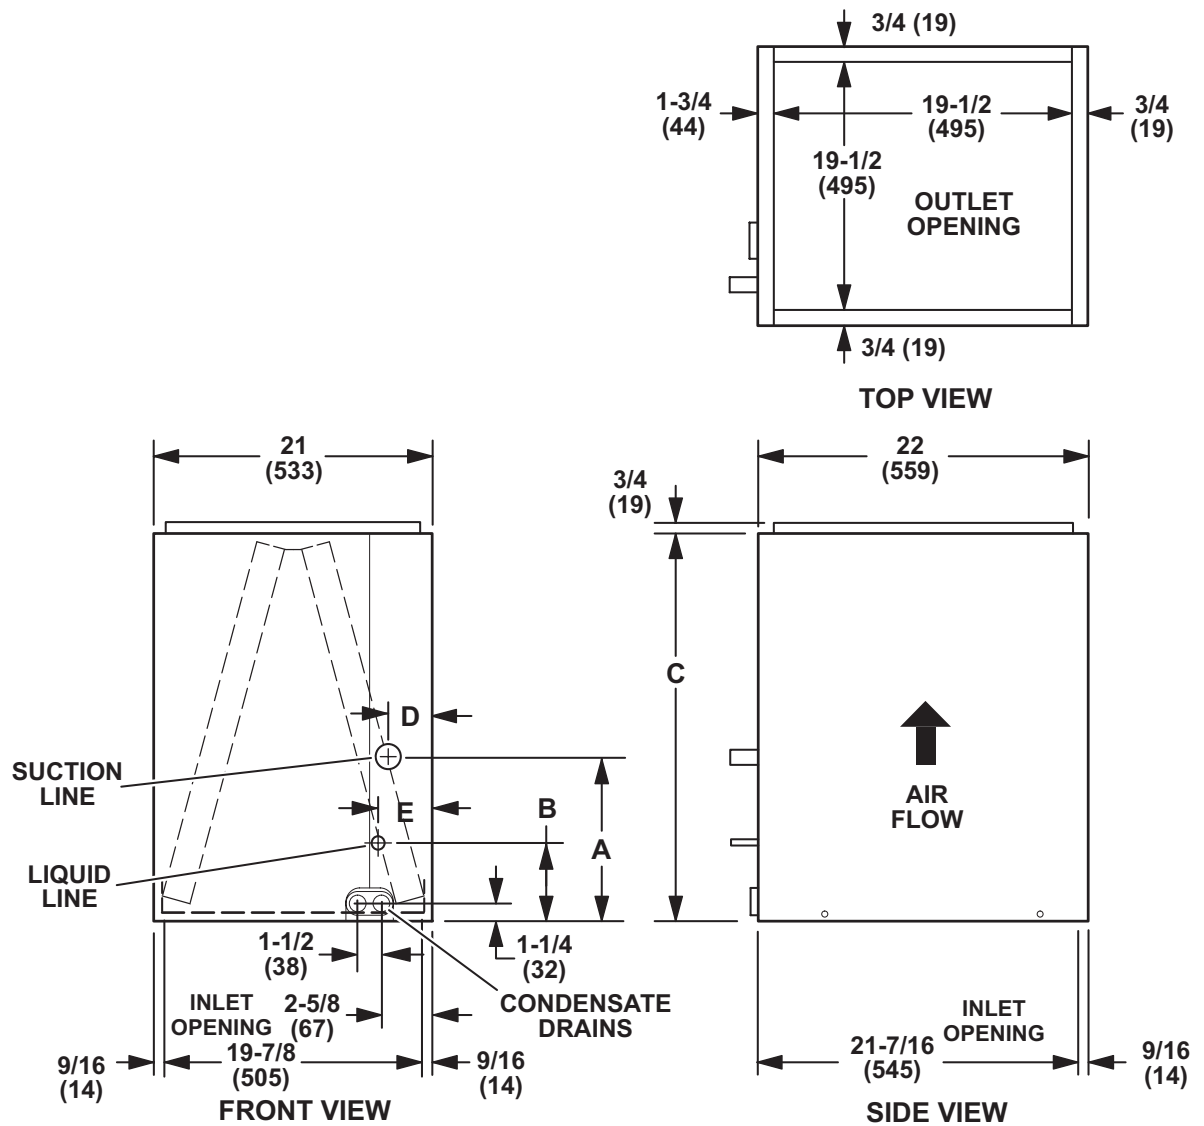

| Model Number | A      |     | B     |    | C      |     | D     |    | E     |    |
|--------------|--------|-----|-------|----|--------|-----|-------|----|-------|----|
|              | in.    | mm  | in.   | mm | in.    | mm  | in.   | mm | in.   | mm |
| CX35-49C-6F  | 10     | 254 | 3-5/8 | 92 | 29-1/2 | 749 | 2-3/8 | 60 | 2-5/8 | 66 |
| CX35-60C-6F  | 14-1/2 | 368 | 3-5/8 | 92 | 31-1/2 | 800 | 2-3/8 | 60 | 2-5/8 | 66 |

## CX34 TO CX35 CROSS-REFERENCE

| CX34 Model No.                | Tons    | Dimensions<br>(H x W x D) | Order No.    | CX35 Model No.              | Tons    | Dimensions<br>(H x W x D) | Order No.    |
|-------------------------------|---------|---------------------------|--------------|-----------------------------|---------|---------------------------|--------------|
| CX34-18/24A-6F                | 1.5 - 2 | 16.5 x 14.5 x 21          | <b>20M63</b> | CX35-18/24A-6F              | 1.5 - 2 | 16.5 x 14.5 x 21          | <b>10C41</b> |
| CX34-18/24B-6F                | 1.5 - 2 | 16.5 x 17.5 x 21          | <b>20M67</b> | CX35-18/24B-6F              | 1.5 - 2 | 16.5 x 17.5 x 21          | <b>10C42</b> |
| <sup>1</sup> CX34-18/24C-6F   | 1.5 - 2 | 16.5 x 21 x 21            | <b>70M27</b> | <sup>1</sup> CX35-18/24B-6F | 1.5 - 2 | 16.5 x 17.5 x 21          | <b>10C42</b> |
| <sup>2</sup> CX34-19A-6F      | 1.5     | 16.5 x 14.5 x 21          | <b>85M16</b> | <sup>2</sup> CX35-24A-6F    | 2       | 18.5 x 14.5 x 21          | <b>10C43</b> |
| CX34-25A-6F                   | 2       | 18.5 x 14.5 x 21          | <b>85M17</b> | CX35-24A-6F                 | 2       | 18.5 x 14.5 x 21          | <b>10C43</b> |
| CX34-25B-6F                   | 2       | 18.5 x 17.5 x 21          | <b>85M18</b> | CX35-24B-6F                 | 2       | 18.5 x 17.5 x 21          | <b>10C44</b> |
| CX34-31A-6F                   | 2.5     | 22.5 x 14.5 x 21          | <b>85M19</b> | CX35-30A-6F                 | 2.5     | 22.5 x 14.5 x 21          | <b>10C47</b> |
| CX34-31B-6F                   | 2.5     | 22.5 x 17.5 x 21          | <b>85M20</b> | CX35-30B-6F                 | 2.5     | 22.5 x 17.5 x 21          | <b>10C48</b> |
| <sup>2</sup> CX34-30A-6F      | 2.5     | 20.5 x 14.5 x 21          | <b>20M64</b> | <sup>2</sup> CX35-30/36A-6F | 2.5 - 3 | 24.5 x 14.5 x 21          | <b>10C49</b> |
| CX34-36A-6F                   | 3       | 24.5 x 14.5 x 21          | <b>20M65</b> | CX35-30/36A-6F              | 2.5 - 3 | 24.5 x 14.5 x 21          | <b>10C49</b> |
| <sup>2</sup> CX34-30B-6F      | 2.5     | 20.5 x 17.5 x 21          | <b>20M68</b> | <sup>2</sup> CX35-30/36B-6F | 2.5 - 3 | 24.5 x 17.5 x 21          | <b>10C50</b> |
| CX34-36B-6F                   | 3       | 24.5 x 17.5 x 21          | <b>20M69</b> | CX35-30/36B-6F              | 2.5 - 3 | 24.5 x 17.5 x 21          | <b>10C50</b> |
| <sup>2</sup> CX34-30C-6F      | 2.5     | 20.5 x 21 x 21            | <b>70M28</b> | <sup>2</sup> CX35-30/36C-6F | 2.5 - 3 | 24.5 x 21 x 21            | <b>10C51</b> |
| CX34-36C-6F                   | 3       | 24.5 x 21 x 21            | <b>20M74</b> | CX35-30/36C-6F              | 2.5 - 3 | 24.5 x 21 x 21            | <b>10C51</b> |
| CX34-38A-6F                   | 3       | 24.5 x 14.5 x 21          | <b>20M66</b> | CX35-36A-6F                 | 3       | 24.5 x 14.5 x 21          | <b>10C52</b> |
| CX34-38B-6F                   | 3       | 24.5 x 17.5 x 21          | <b>20M70</b> | CX35-36B-6F                 | 3       | 24.5 x 17.5 x 21          | <b>10C53</b> |
| <sup>2</sup> CX34-42B-6F      | 3.5     | 24.5 x 17.5 x 21          | <b>20M71</b> | <sup>2</sup> CX35-48B-6F    | 3.5 - 4 | 27.5 x 17.5 x 21          | <b>10C54</b> |
| CX34-43B-6F                   | 3.5     | 27.5 x 17.5 x 21          | <b>85M21</b> | CX35-48B-6F                 | 3.5 - 4 | 27.5 x 17.5 x 21          | <b>10C54</b> |
| <sup>2</sup> CX34-44/48B-6F   | 4       | 24.5 x 17.5 x 21          | <b>20M72</b> | <sup>2</sup> CX35-48B-6F    | 3.5 - 4 | 27.5 x 17.5 x 21          | <b>10C54</b> |
| CX34-43C-6F                   | 3.5     | 27.5 x 21 x 21            | <b>85M22</b> | CX35-48C-6F                 | 3.5 - 4 | 27.5 x 21 x 21            | <b>10C55</b> |
| <sup>2</sup> CX34-44/48C-6F   | 3.5 - 4 | 24.5 x 21 x 21            | <b>20M75</b> | <sup>2</sup> CX35-48C-6F    | 3.5 - 4 | 27.5 x 21 x 21            | <b>10C55</b> |
| <sup>2,3</sup> CX34-44/48C-6F | 3.5 - 4 | 24.5 x 21 x 21            | <b>20M75</b> | <sup>2,3</sup> CX35-49C-6F  | 4       | 29.5 x 21 x 22            | <b>10C56</b> |
| CX34-49C-6F                   | 4       | 29.5 x 21 x 22            | <b>85M23</b> | CX35-49C-6F                 | 4       | 29.5 x 21 x 22            | <b>10C56</b> |
| CX34-50/60C-6F                | 4 - 5   | 27.5 x 21 x 21            | <b>20M76</b> | CX35-50/60C-6F              | 4 - 5   | 27.5 x 21 x 21            | <b>10C57</b> |
| CX34-62C-6F                   | 5       | 31.5 x 21 x 22            | <b>85M24</b> | CX35-60C-6F                 | 5       | 31.5 x 21 x 22            | <b>10C58</b> |
| <sup>2</sup> CX34-60D-6F      | 5       | 25.5 x 24.5 x 21          | <b>20M77</b> | <sup>2</sup> CX35-60D-6F    | 5       | 29.5 x 24.5 x 21          | <b>10C59</b> |
| CX34-62D-6F                   | 5       | 29.5 x 24.5 x 21          | <b>20M78</b> | CX35-60D-6F                 | 5       | 29.5 x 24.5 x 21          | <b>10C59</b> |

<sup>1</sup> Coil **widths** do not match between CX34 and CX35 models.

<sup>2</sup> Coil **heights** do not match between CX34 and CX35 models.

<sup>2</sup> Coil **depths** do not match between CX34 and CX35 models.

## REVISIONS

| Sections   | Description of Change                                                  |
|------------|------------------------------------------------------------------------|
| Dimensions | Plumbing dimensions updated due to move to new manufacturing facility. |



Visit us at [www.lennox.com](http://www.lennox.com)

For the latest technical information, [www.LennoxPros.com](http://www.LennoxPros.com)

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

©2019 Lennox Industries, Inc.