

Multigas Detector Quick Start Card

Please review the back of this card for a detailed illustration of the following components:

① ▼ Button ② ▲ Button ③ ⏻ Button

- Charge battery until green LED is lit (rechargeable units only).
- Turn the instrument ON with the ⏻ button. Instrument performs a self test and sensor warm up, then displays sensor information & set points.
- A flow test must be performed during startup. Block pump inlet when instructed. See section 3.2.1 of the manual.
- Fresh Air Setup: press 'YES' or 'NO' buttons.
- To page through the screens, use the ▼ button from the Normal Operation screen; follow display instructions and press corresponding buttons to advance to next page.
- To reset alarms press ▲ button.
- Perform a Bump Test / Calibration Check daily for each installed sensor per section 3.7 of the manual.
- To Calibrate: ensure you are in fresh air and press and hold the ▲ button and follow instructions on the screen. See section 3.8 of the manual for complete calibration instructions.
- To activate / deactivate MotionAlert™ feature, use the ▼ button until MotionAlert screen appears, and follow display instructions.
- To activate the InstantAlert™ feature, press and hold ▼ button.
- Turn the instrument OFF by holding the ⏻ button.

Note: MSALINK USERS VISIT WWW.MSANORTHAMERICA.COM FOR LATEST VERSION OR CONTACT CUSTOMER SERVICE FOR ASSISTANCE


⚠ WARNING

This quick start card provides only a brief description of the operating instructions for the ALTAIR 5 and ALTAIR 5X Multigas Detector. The user of this instrument must be fully aware of the limitations and instructions supplied in the operating instruction manual. Failure to follow the instructions may lead to serious personal injury or death.

MSA

MINE SAFETY APPLIANCES COMPANY
CRANBERRY TWP., PENNSYLVANIA, U.S.A. 16066

Quick Start Card

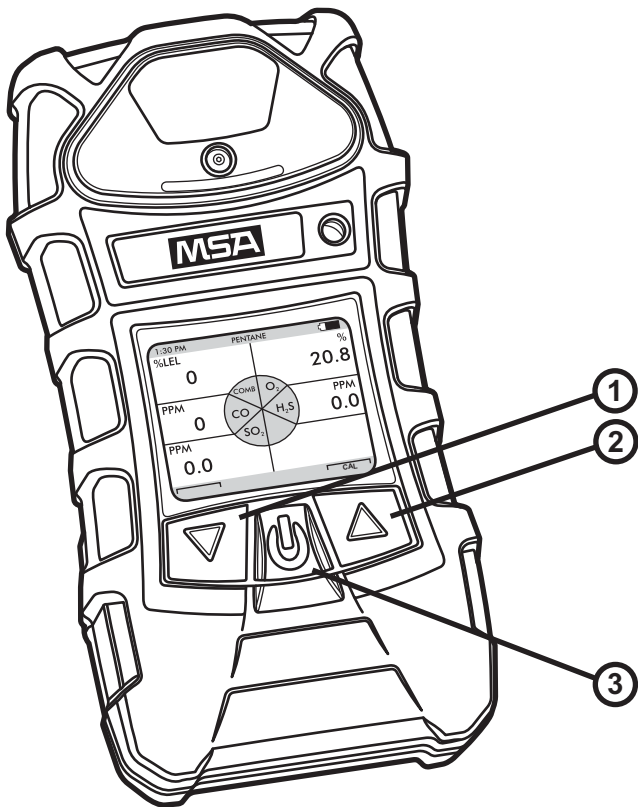

For models: Altair[®] 5, Altair[®] 5X