

V-SERIES™ Standard SRLs



V-TEC® Standard SRL

WE KNOW WHAT'S AT STAKE.

V-TEC® Standard SRLs

With premium components and innovative engineering, the V-TEC Standard SRL offers controlled cable retraction—preventing excessive lifeline retraction speed and protecting internal parts from damage.



Easy Inspection

Clear outer housing.



Easy Transportation

Carry handle included.



Assured Safety

Spiral radial energy-absorbing technology requires zero calibration or adjustment.




Downtime Minimized

Completely field-serviceable, the cable, energy-absorber, and retraction dampener can all be replaced on site.



Versatile

Galvanized or stainless steel cable.




Durable

Retraction dampening features control the cable speed to 3 m/s (<10 ft./s).



Built to Last

Stainless steel/engineered plastics.

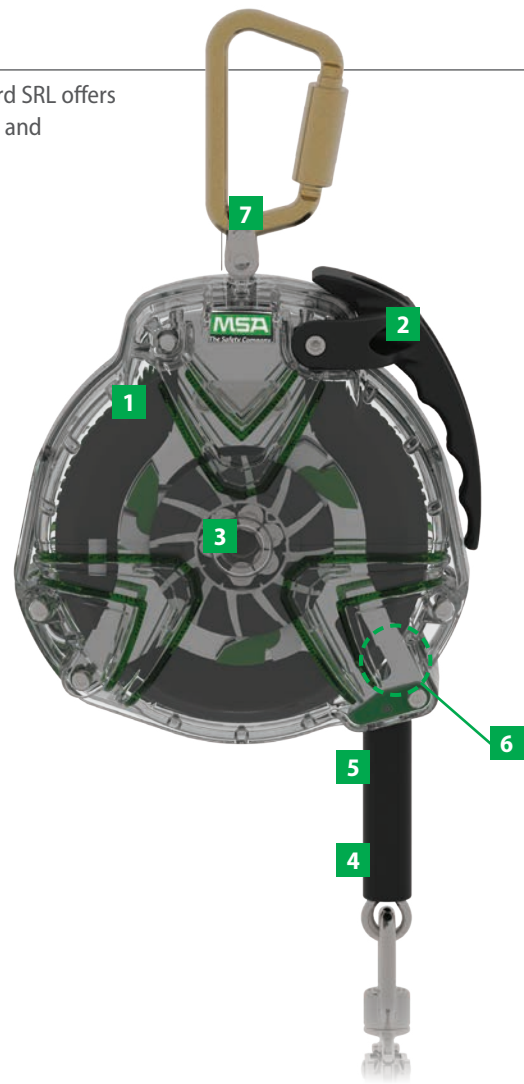

15 m
(50 ft.)



10 m
(30 ft.)



6 m
(20 ft.)

V-TEC Standard SRLs

Part Number	Description
63206-00AEU	V-TEC Standard Cable SRL, 6 m, Galvanized Cable, Snaphook
63306-00AEU	V-TEC Standard Cable SRL, 6m, Stainless Steel Cable, Snaphook
63306-00BEU	V-TEC Standard Cable SRL, 6m, Stainless Steel Cable, Stainless Steel TA Karabiner
63210-00AEU	V-TEC Standard Cable SRL, 10 m, Galvanized Cable, Snaphook
63310-00AEU	V-TEC Standard Cable SRL, 10 m, Stainless Steel Cable, Snaphook
63310-00BEU	V-TEC Standard Cable SRL, 10m , Stainless Steel Cable, Stainless Steel TA Karabiner
63215-00AEU	V-TEC Standard Cable SRL, 15 m, Galvanized Cable, Snaphook
63315-00AEU	V-TEC Standard Cable SRL, 15 m, Stainless Steel Cable, Snaphook
63315-00BEU	V-TEC Standard Cable SRL, 15 m, Stainless Steel Cable, Stainless Steel TA Karabiner

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 4600-099-MC / November 2019
© MSA 2019

MSA Australia
11 Columbia Way
Baulkham Hills NSW 2153
Customer Service: 1300 728 672
Email: aus.customerservice@MSAsafety.com

MSA New Zealand
Customer Service: 0800 441 335
Email: nz.customerservice@MSAsafety.com

MSA Singapore
MSA S.E Asia Pte Ltd
35 Marsiling Industrial Estate Road 3,
#04-01, Singapore 739257
Phone: +65 6350 4500
Fax: +65 6350 4505
Email: msa.singapore@MSAsafety.com

MSA Safety Malaysia Sdn Bhd
No.22, Jalan PPU 2A,
Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor
Malaysia
Phone: +603 9767 8800
Fax: +603 8724 2208

PT MSA Indonesia
Kompleks Multiguna Kemayoran No
1-K Jl. Rajawali Selatan Raya Block C5
No. 2 Jakarta Utara 14410
Indonesia
Phone: +62 21 6409 000
Fax: +62 21 641 2831
Email: msa.indonesia@MSAsafety.com