

23-ft & 30-ft Cable Self-Retracting Lanyards (SRLs)

23-ft and 30-ft Cable Self Retracting Lanyards

Snaphooks and carabiners are marked with the ANSI Z359.12-09 standard, and are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating (consistent with ANSI Z359.12-09).


Meets	Max Arrest Distance	Free Fall Limit	Max Arresting Force	Avg. Arresting Force	Max Capacity	
					Web SRL	Cable SRL
ANSI - CLASS B Z359.14-2012	54 in. (1372 mm)	24 in. (610 mm)	1800 lbs (8 kN)	900 lbs (4 kN)	130-310 lbs (59-141 kg)	130-310 lbs (59-141 kg)
CSA - TYPE 2 Z259.2.2-98	55 in. (1.4 m)	24 in. (0.6 m)	1800 lbs (8 kN)	N/A	310 lbs (141 kg)	310 lbs (141 kg)
OSHA 29 CFR 1910.66/1926.502	42 in. (1067 mm)	24 in. (610mm)	1800 lbs (8 kN)	N/A	310 lbs (141 kg)	400 lbs (181 kg)

*ANSI only recognizes 130-310lbs user capacity.

	62407-00US Galvanized Cable	62207-00US Stainless Steel Cable	62409-00US Galvanized Cable	62209-00US Stainless Steel Cable
LANYARD MATERIAL	3/16 in (7x19) Grade 316 Galvanized Cable	3/16 in (7x19) Grade 316 Stainless Steel Cable	3/16 in (7x19) Grade 316 Galvanized Cable	3/16 in (7x19) Grade 316 Stainless Steel Cable
HOUSING MATERIAL	Impact Modified Nylon	Aluminum	Impact Modified Nylon	Aluminum
HOUSING CONNECTION	Steel Carabiner	Steel Carabiner	Steel Carabiner	Steel Carabiner
LANYARD CONNECTION	Indicating Steel Snaphook	Indicating Stainless Steel Snaphook	Indicating Steel Snaphook	Indicating Stainless Steel Snaphook
(A)	27½ in (438 mm)	27½ in (438 mm)	27½ in (438 mm)	27½ in (438 mm)
(B)	6¾ in (243 mm)	6¾ in (243 mm)	6¾ in (243 mm)	6¾ in (243 mm)
DEPTH	4¾ in (195 mm)	4¾ in (195 mm)	4¾ in (195 mm)	4¾ in (195 mm)
WIDTH	11.5 lb (5.2 kg)	27.7 lb (12.6 kg)	11.5 lb (5.2 kg)	27.7 lb (12.6 kg)



62407-00US
(Galvanized Cable – 23 ft)

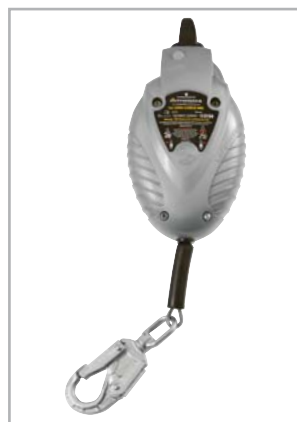

62207-00US
(Stainless Steel Cable – 23 ft)



62409-00US
(Galvanized Cable – 30 ft)



62209-00US
(Stainless Steel Cable – 30 ft)

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products. Specifications subject to change without notice.



MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAafety.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222
Fax 52 - 44 2227 3943