


USG DONN® BRAND ZXLA™ ACOUSTICAL SUSPENSION SYSTEM

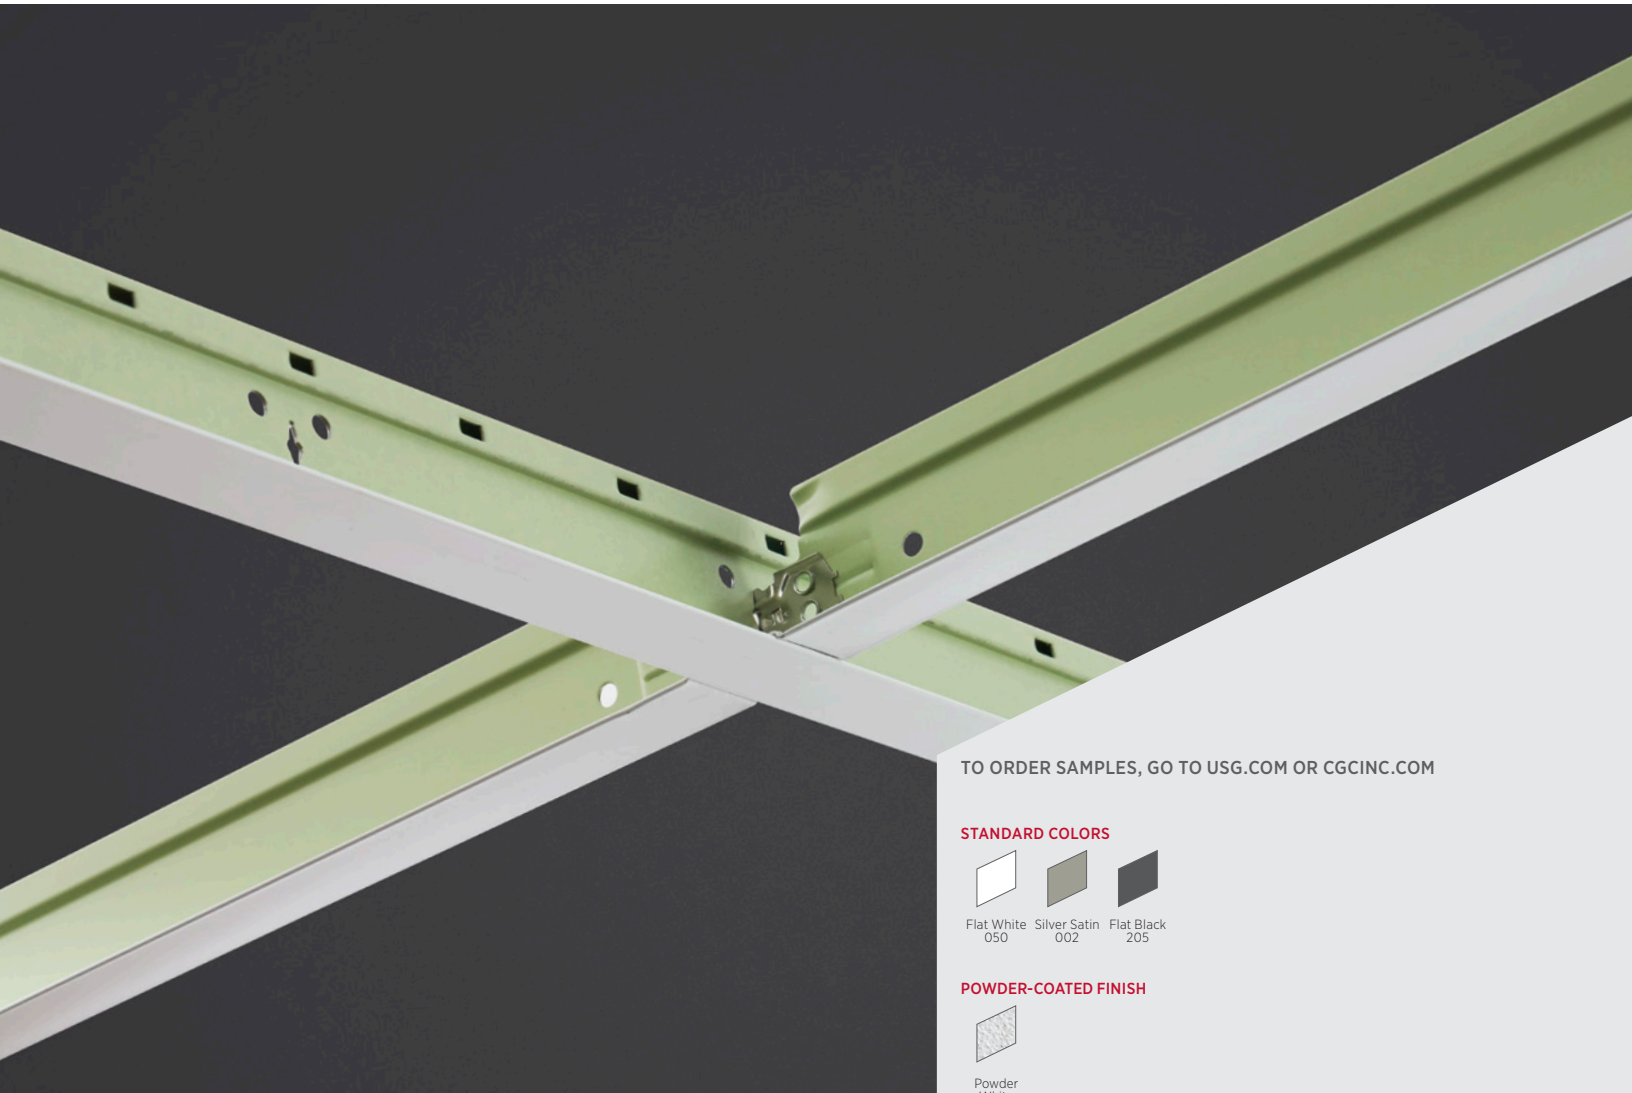

FEATURES AND BENEFITS

- G90 hot-dipped galvanized steel body with aluminum cap, conforms to ASTM C635.
- Polyester paint finish and stainless steel clip for increased corrosion protection.
- Complies with all national code requirements, including seismic and fire-rated assemblies up to two hours.
- Proprietary Quick-Release™ cross tees.
- Tested for exterior wind-uplift applications.
- Aluminum material complies with ASTM B209/B209M

APPLICATIONS

- Exterior Soffits
- Food Processing
- Healthcare
- Industrial Applications
- Laboratories
- Parking Garages
- Locker Rooms

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White 050 Silver Satin 002 Flat Black 205

POWDER-COATED FINISH




Powder White 3767


CUSTOM COLORS AVAILABLE



PROFILE



EDGE DETAIL



USG DONN® BRAND ZXLA™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative


TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com


30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

15/16" TEE SYSTEM⁴ Main Tee



Cross Tee 1-1/2" (38 mm)



MOLDING³



PHYSICAL DATA

ASTM Class	Length	Height	Item No.	Fire Class	Color	Seismic Design Category ^{1,5}		Rated Load ²		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Intermediate Duty ²	12'	USG 1.64" 42 mm CGC 1.5" 25 mm	ZXLA24		Flat White Flat Black Satin Silver	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.3 lb./LF	3.7 lb./LF
Heavy Duty	12'	USG 1.64" 42 mm	ZXLA26		Flat White Flat Black Satin Silver	A-F	7/8" Molding ACM7 Clip	16 lb./LF	8.3 lb./LF	4.9 lb./LF
—	2'	1-1/2" 38 mm	ZXLA224		Flat White Flat Black Satin Silver	—	—	—	—	—
—	4'	1-1/2" 38 mm	ZXLA424		Flat White Flat Black Satin Silver	—	—	—	—	—

Low Emissions (VOC)
Certified for low emitting performance, meets CDPH 01350 v1.2 - 2017. Certificates of Compliance for Low VOC Emissions are available on usg.com and at usg.ecomedes.com.



Wall Angle	Length	Item No.	Color
	12'	M7Z	Flat White Flat Black Satin Silver

Product literature and samples
Exterior systems guide: SC2561

Material
G90 hot-dipped galvanized steel tee and aluminum cap; stainless steel clip. Baked-on polyester paint or powder coated finish.

Installation
Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools
usgdesignstudio.com, cgcdesignstudio.com
or usg.ecomedes.com

ICC Evaluation Report for Code Compliance

See ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use in seismic design categories A through F. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty per ASTM C635 when tested and evaluated in accordance with ASTM E3090 and AC368.

Limitations

Finish is not UV-resistant; should not be installed where direct exposure to sun or weather will occur, such as fascias or facades. Not suitable for areas subject to high concentrations of acid rain. Indirect exposure to severe environmental conditions may shorten the life span of the product. The specific design of exterior ceiling installations requires the review and approval of the architect or engineer of record. Please refer to SC2561 for more information about exterior ceiling applications.

Notes

- All USG main tees, cross tees and main tee-hanger wire connections meet AC 368 and ASTM E580 requirements for tension and compression strength, as tested per ASTM E3090.
- Rated Load expressed in lb./LF based on simple span tests in accordance with ASTM E3090 with deflection limit of L/360. Duty rating is assigned based on rated load per ASTM C635.
- Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- Metric sizes available by RTQ.
- Seismically tested in accordance with ASTM E3118 and AC156.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3029/rev. 7-25
© 2025 USG Corporation and/or its affiliates. All rights reserved.
Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, ECLIPSE, FIRECODE, QUICK-RELEASE, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

