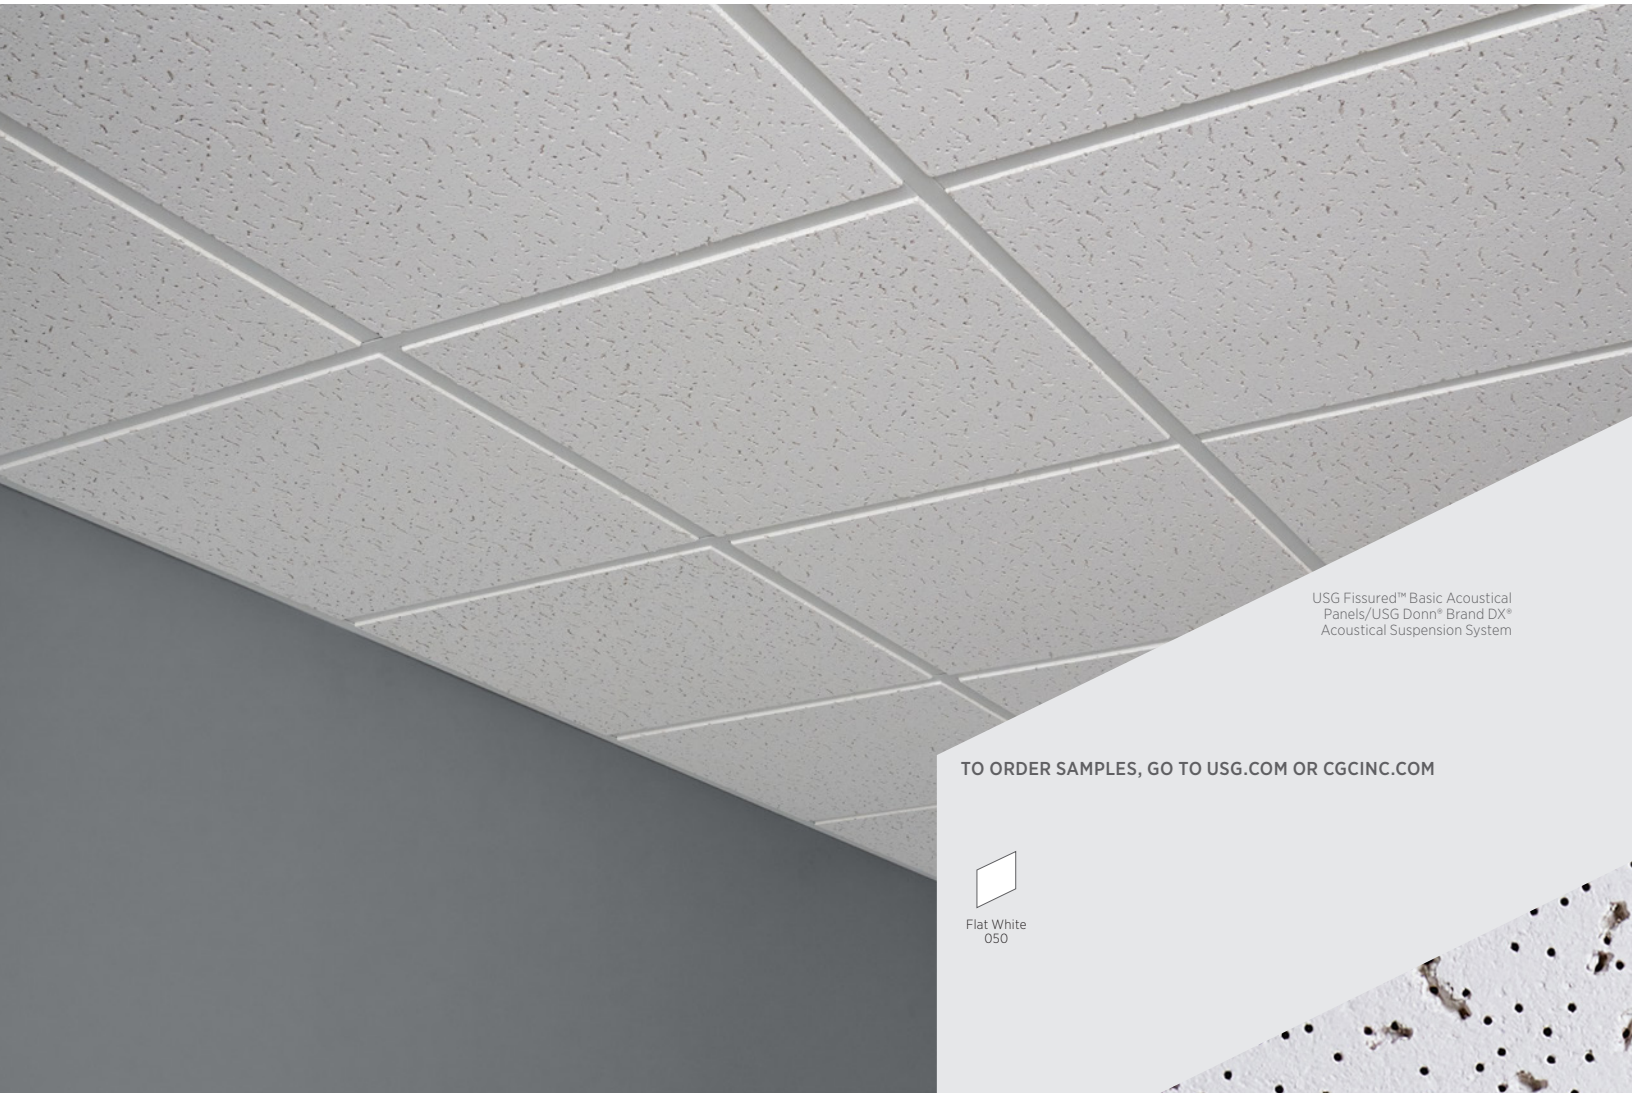


USG FISSURED™ BASIC ACOUSTICAL PANELS



USG Fissured™ Basic Acoustical
Panels/USG Donn® Brand DX®
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional Firecode® product designed to meet life-safety codes.

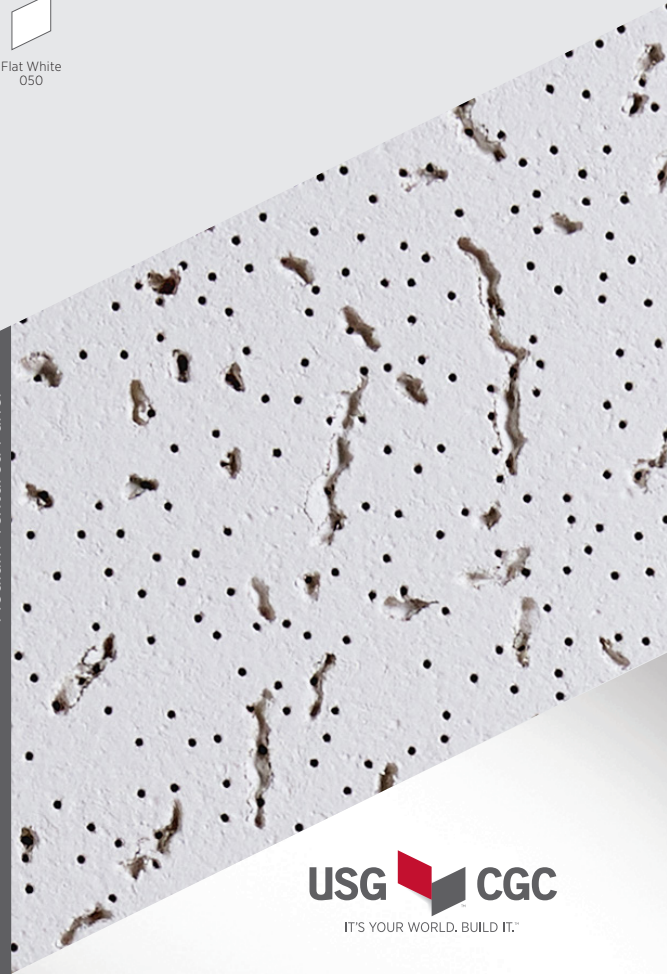
APPLICATIONS

- Administrative Offices
- Corridors
- Mass Merchandisers
- Convenience Stores

SUBSTRATE

- Wet-formed Mineral Fiber

Medium-Textured Panel



USG FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)





PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



HIGH RECYCLED
CONTENT



| Edge | Panel Size | Fire Class ² | Item No. | NRC | CAC Min. | LR ³ | Color | Grid Options | VOC Emissions | Recycled Content ¹ | Panel Cost |
|---|------------|---|----------|---|---|--|-------|---|---|---|------------|
|  | 2'x2'x5/8" |  | 560 |  |  |  | White |  |  |  | \$ |
| | 2'x2'x5/8" |  | 585 | 0.55 | 35 | 0.81 | White | B,E | Low | 57-65% | \$ |
| | 2'x4'x5/8" | Class A | 562 | 0.55 | 35 | 0.81 | White | A,C | Low | 38-47% | \$ |
| | 2'x4'x5/8" |  | 586 | 0.55 | 35 | 0.81 | White | B | Low | 57-65% | \$ |
|  | 2'x2'x5/8" | Class A | 506 | 0.55 | 33 | 0.81 | White | F | Low | 37-46% | \$ |
| | 2'x4'x5/8" | Class A | 507 | 0.55 | 35 | 0.81 | White | F | Low | 37-46% | \$ |

Low Emissions (VOC)

Certified for low emitting performance, meets CDPH 01350 v1.2 - 2017. Certificates of Compliance for Low VOC Emissions are available on usg.com and at usg.ecomedes.com.







High Recycled Content

USG classifies High Recycled Content as greater than 50%. Methodology of calculation based on FTC guidelines.

Firecode®

USG FISSURED™ BASIC PANELS

GRID PROFILE OPTIONS

| A USG DX® | B USG DXL™ | C USG DXW™ | D ⁴ USG Centricitee™ DXT™ | E ⁴ USG Centricitee™ DXLT™ | F USG DX® |
|---|---|---|---|---|---|
|  |  |  |  |  |  |

PHYSICAL DATA

ASTM E1264 classification
ASTM E1264-22 Type III, Form 2, Pattern C & D
ASTM E1264-23 Type A, Form A1.2, Pattern C & D

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-2
FR-83

Online tools
usgdesignstudio.com, cgcdesignstudio.com
or usg.ecomedes.com

Weight
0.62-0.64 lb./sq. ft. (Class A panels)
1.09-1.11 lb./sq. ft. (Firecode® panels)

Thermal resistance
R-1.4 (Class A panels)
R-1.6 (Firecode® panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes**
- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
 - Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation. It is not recommended to mix Firecode® and Class A panels in the same ceiling plane.
 - LR values are shown as averages.
 - Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1815/rev. 7-25
© 2025 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXL, DXLT, DXT, DXW, FIRECODE, FISSURED, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

