



USG GLACIER™ BASIC ACOUSTICAL PANELS

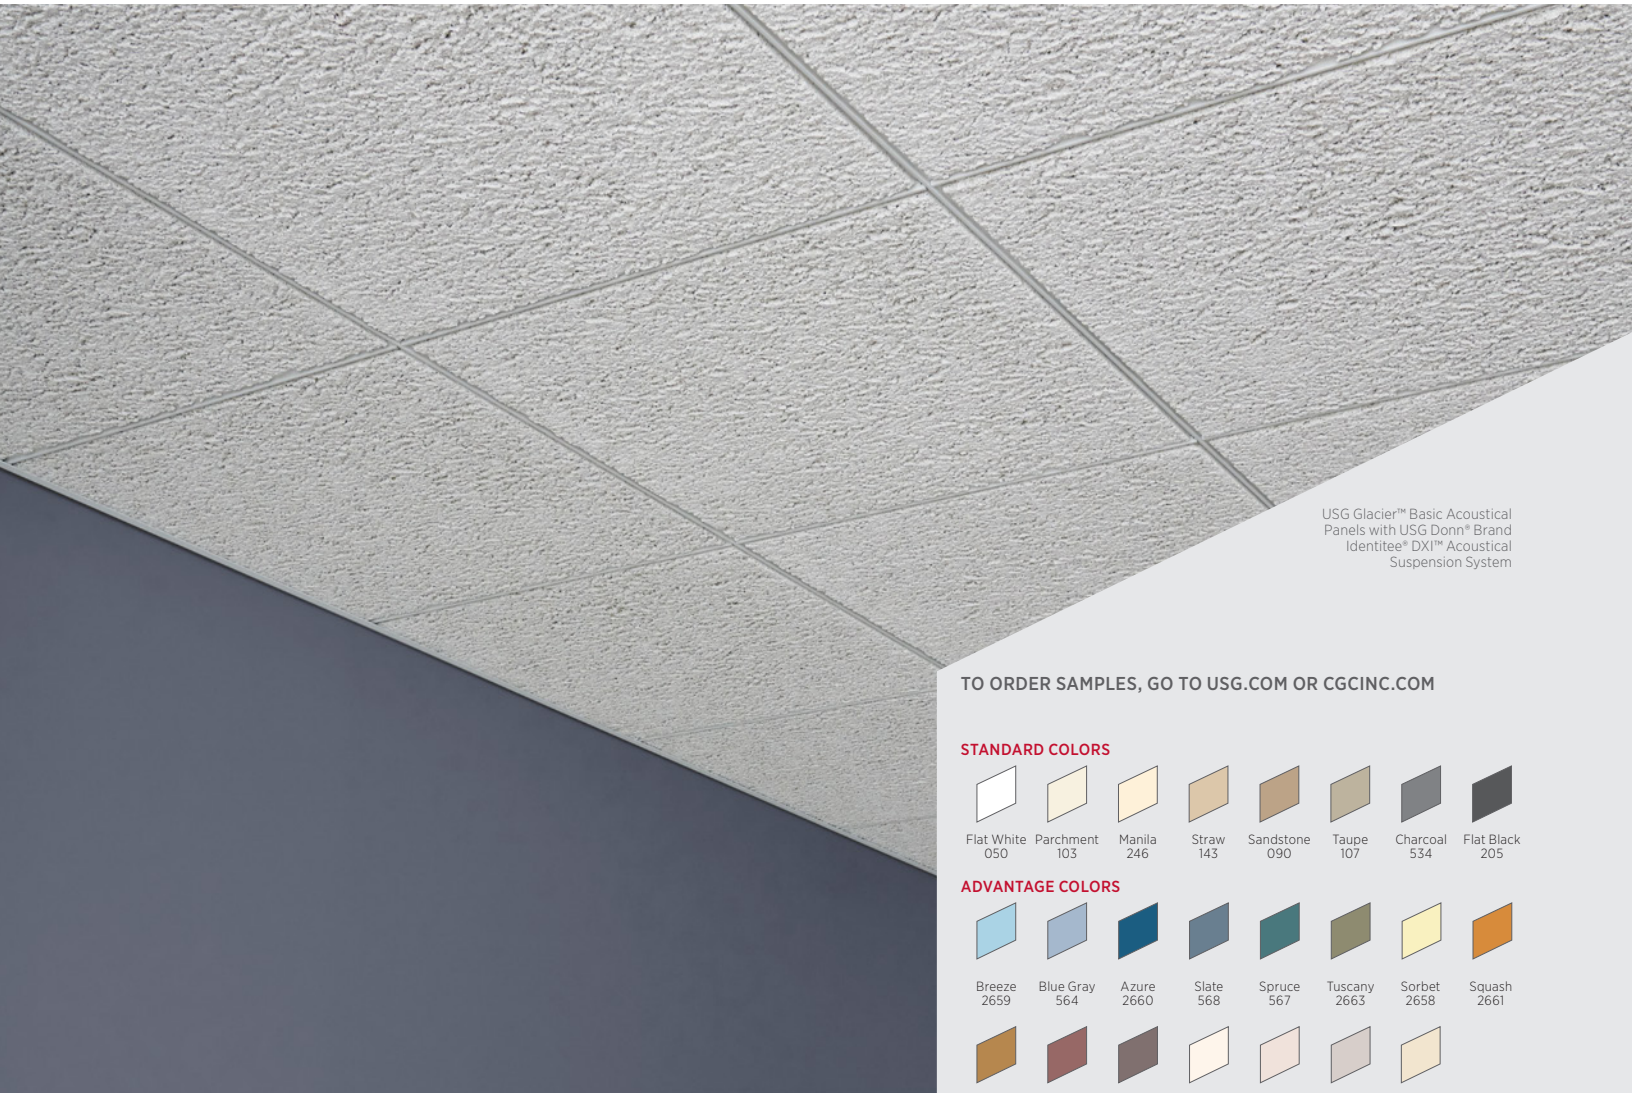


USG Glacier™ Basic Acoustical Panels with USG Donn® Brand Identitee® DXI™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


STANDARD COLORS



ADVANTAGE COLORS

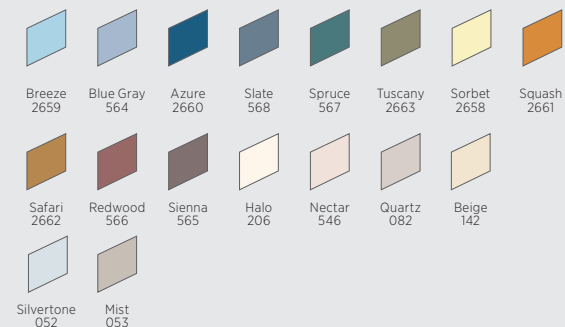

PREMIUM COLORS

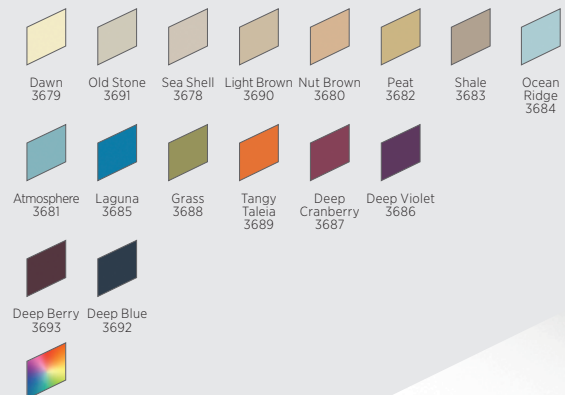

Limited color options available. See Ceiling Solutions Color Program for details.

FEATURES AND BENEFITS

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- VOC emissions meet CA Specification 01350.
- USDA Certified Biobased Product.⁵
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional Firecode® product designed to meet life-safety codes.
- USG Glacier™ Basic Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Food Courts
- Hospitality
- Libraries
- Restaurants

SUBSTRATE

- Cast Mineral Fiber

USG GLACIER™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com









































PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL COM/GG UL 2818



HIGH RECYCLED CONTENT



USG GLACIER™ BASIC PANELS

UL Classified												
Edge	Panel Size	Fire Class ²	Item No.	NRC	CAC Min.	LR ³	Color ⁴	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
SL 	2'x2'x3/4" Paper-Back		707				White, color ⁴					
	2'x2'x3/4" Paper-Back		715				White					
	2'x4'x3/4" Paper-Back		711				White					
FL 	2'x2'x3/4" Paper-Back		708				White, color ⁴					

Low Emissions (VOC)

Certified for low emitting performance, meets CDPH 01350 v1.2 - 2017. Certificates of Compliance for Low VOC Emissions are available on usg.com and at usg.ecomedes.com.







High Recycled Content

USG classifies High Recycled Content as greater than 50%. Methodology of calculation based on FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX®	B USG DXL™	C USG Centricitee™ DXT™	D USG Finline® DXF™	E USG Finline® 1/8 DXFF™	F USG Identitee® DXI™
					

PHYSICAL DATA

ASTM E1264 classification

ASTM E1264-22 Type III, Form 4, Pattern F
 ASTM E1264-23 Type A, Form A1.4, Pattern F

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type

AP, AP-1, AP-2, AP-3

Weight

1.47 lb./sq. ft. (Class A panels)
 1.52 lb./sq. ft. (Firecode® panels)

Online tools

usgdesignstudio.com, cgcdesignstudio.com
 or usg.ecomedes.com

Thermal resistance

R-1.7 (Class A panels)
 R-1.3 (Firecode® panels)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Texture

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation. It is not recommended to mix Firecode® and Class A panels in the same ceiling plane.
- LR values are shown as averages.
- See Colors selector for more information.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- Additional panel colors are available. Please contact your local sales representative for details.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SCI819/rev. 7-25

© 2025 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, ECOBLUEPRINT, FINELINE, FIRECODE, GLACIER, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

