












Hardware List (included in GC257CF)

	6 PCS Machine Bolts(1-1/4")		2 PCS Long(1-1/4") Flat Head Wood Screws
	2 PCS Keys For File Drawer Lock		4 PCS Wood Dowels ($\phi 8 \times 25 \text{mm}$)
	9 PCS Short (1") Flat Head Wood Screws		

GC257CFT Parts List

E	DESK TOP	1 PC
		

GC257CFB Parts List


A	PEDESTAL	1 PC	B	PEDESTAL	1 PC	C	BACKPANEL	1 PC
								
D	CROSS BAR	1 PC	F	DROP FRONT CENTER DRAWER	1 PC			
								

Notes: Need two people to assemble.


IMPORTANT NOTE: Please keep all hardware parts out of the reach of children.

Instructions:


- ① Move the pedestals ①② to the desired location , insert and tighten **machine bolts (1-1/4")**(6 PCS) to connect backpanel ③ to the two pedestals ①②.
- ② Insert center Cross Bar ④ to the two pedestals ①② , tighten with **1-1/4" flat head wood screws**(2 PCS).

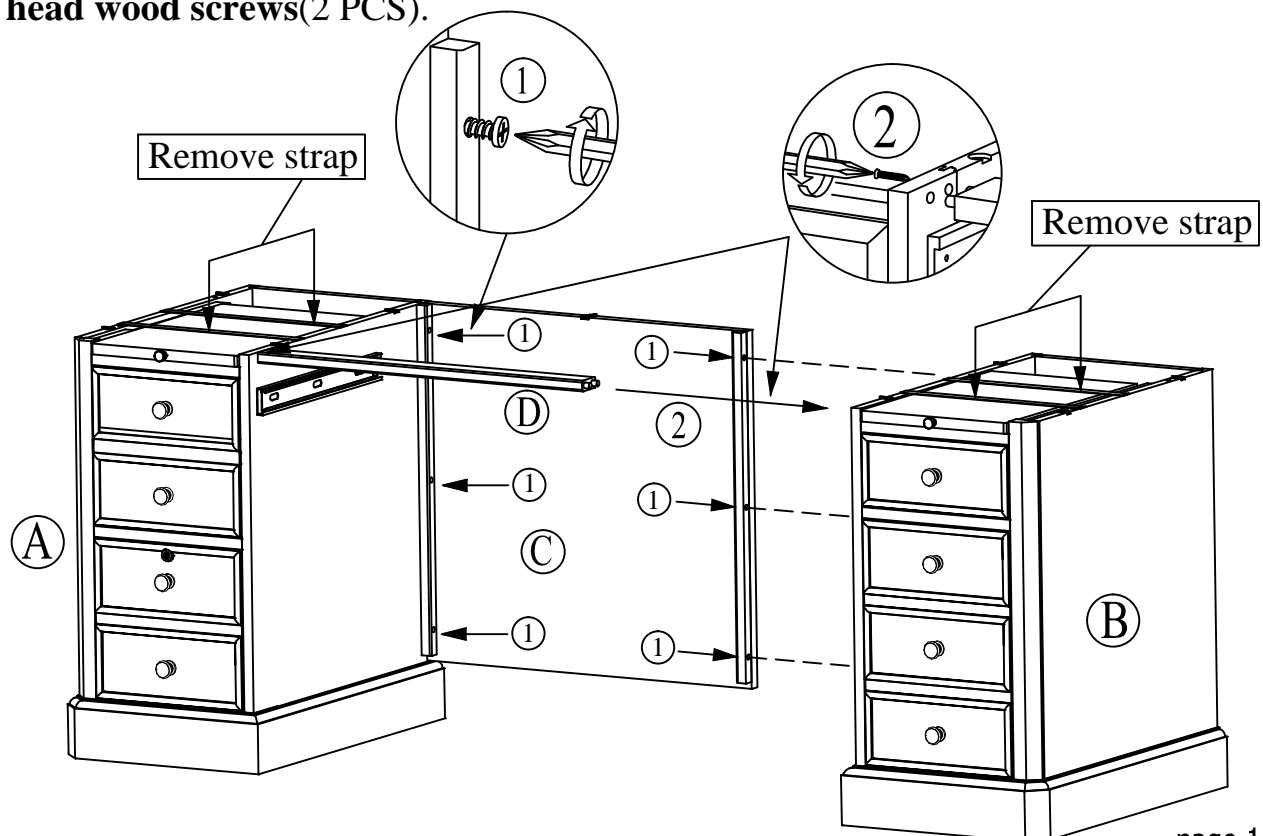

- ③ Insert two **wood dowels**(4 PCS) in each pedestals (A)(B).
 ④ Loosen the screw to adjust **metal figure 8** (9 PCS) of its direction of the panel and re-screw.

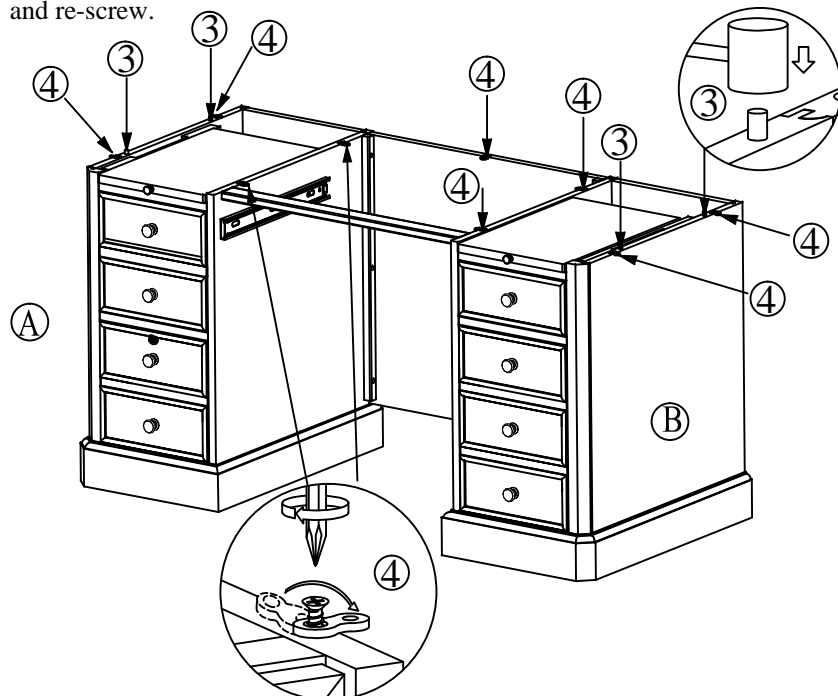



- ⑤ Insert **short (1") flat head wood screws** (9 PCS) through metal figure 8 to connect desk top (E) and pedestals (A)(B).

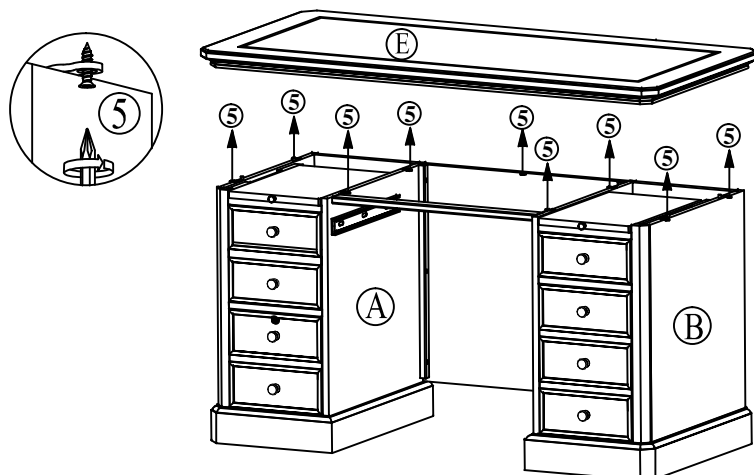

- ⑥ Install the Drop Front center Drawer (F) to place.

Important:

(Be sure to move the ball bearing retainer all the way to the front of the glide and carefully slide the rails into the glides and ball bearing retainer.)

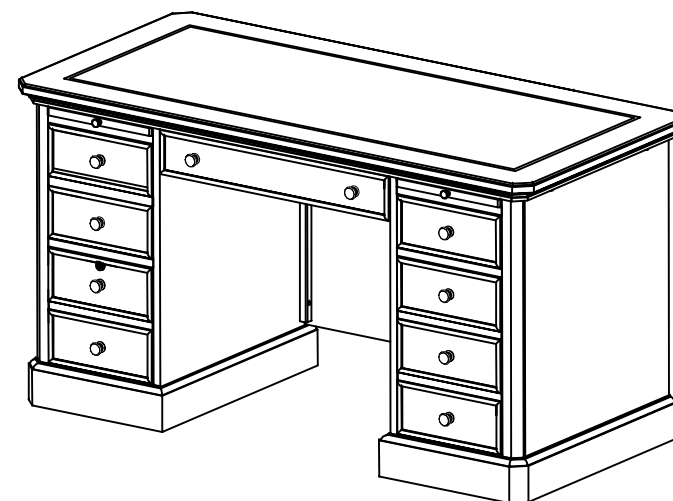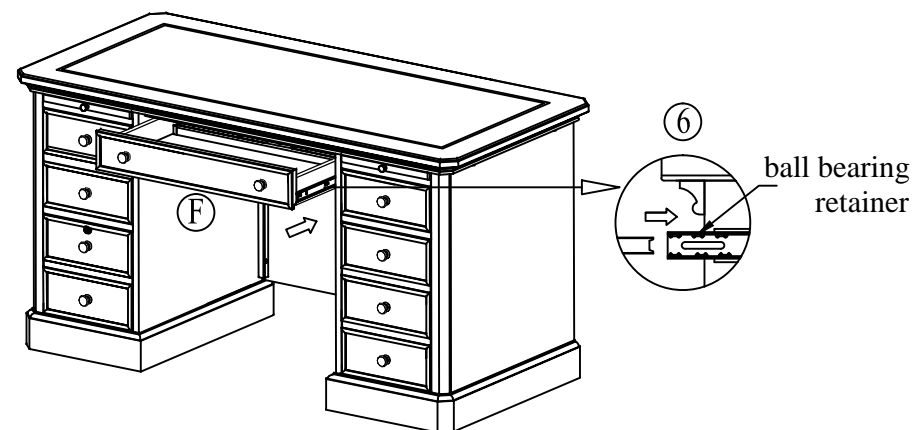

Assembly is now complete.