













Hardware List (included in H148FB)

	6 PCS Machine Bolts(1-1/4")		1 PC Metal Grommet
	2 PCS Keys For File Drawer Lock		2 PCS Long(1-1/4") Flat Head Wood Screws
	4 PCS Wood Dowels (Ø8x25mm)		
	8 PCS Short (3/4") Flat Head Wood Screws		

H148FT Parts List

E	DESK TOP	1 PC
		


H148FB Parts List

A	PEDESTAL	1PC	B	PEDESTAL	1PC	C	BACKPANEL	1PC	D	CROSS BAR	1PC	F	DROP FRONT CENTER DRAWER	1PC
														


Notes: Need two people to assemble.

Instructions:


- ①. Move the pedestals **(A)(B)** to the desired location , insert and tighten **machine Bolts(1-1/4")**(6 PCS) to connect **backpanel (C)** to the two pedestals.
- ②. Insert center **Cross Bar (D)** , tighten **long(1-1/4") flat head wood screws**(2 PCS).

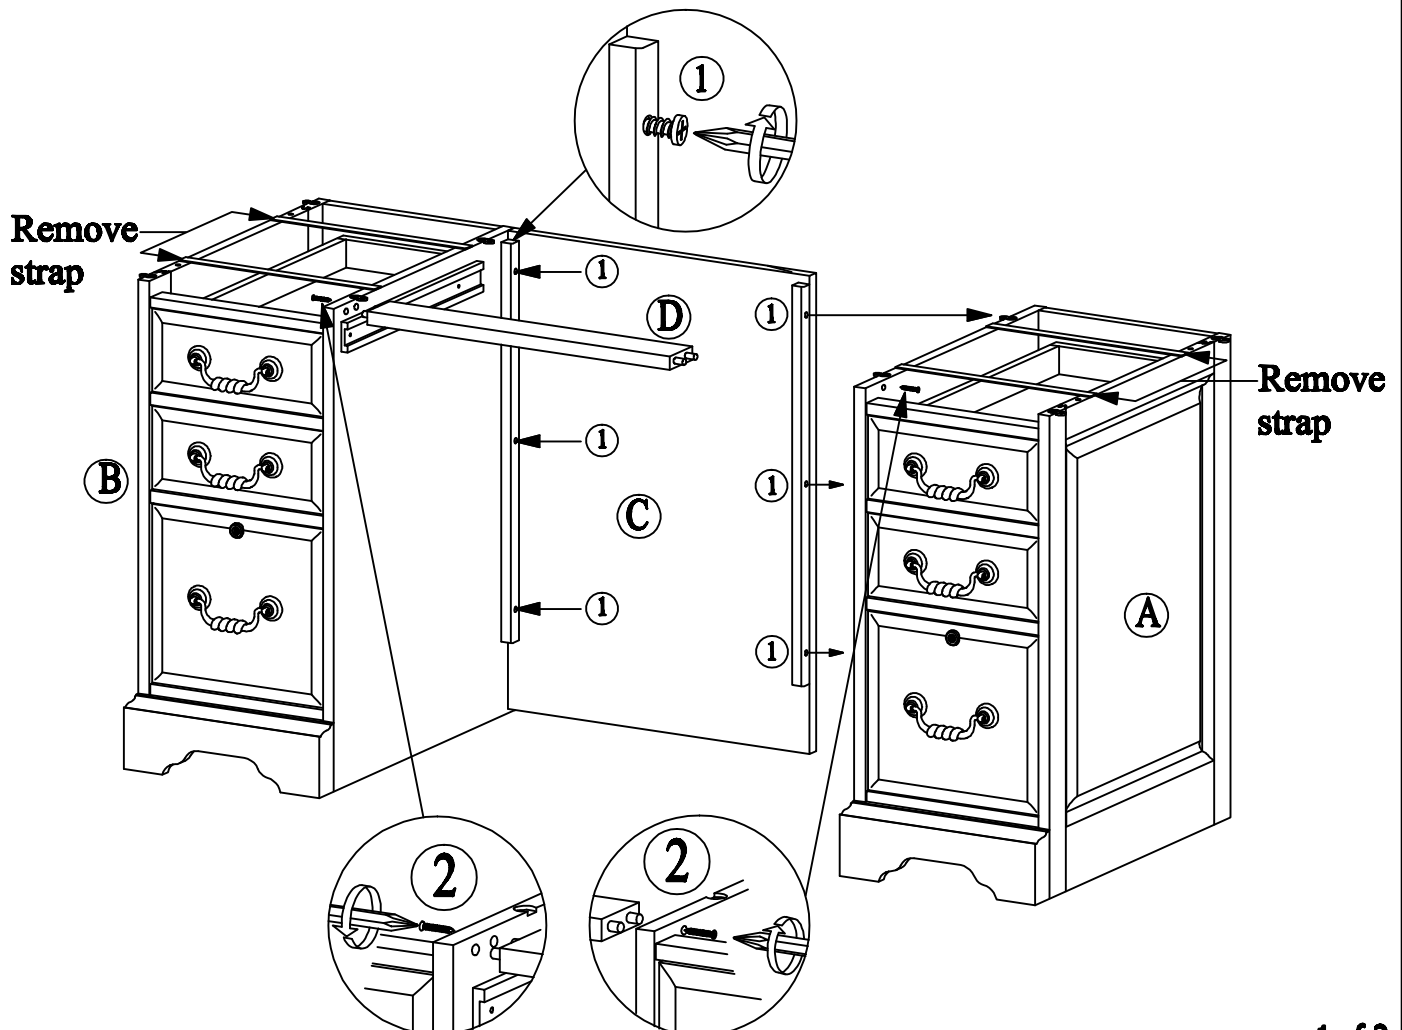



- ③ Insert two wood dowels (4 PCS) in each pedestal **A** **B**.
- ④ Loosen the screw to adjust Metal Figure 8 (8 PCS) of its direction of the panel and re-screw.

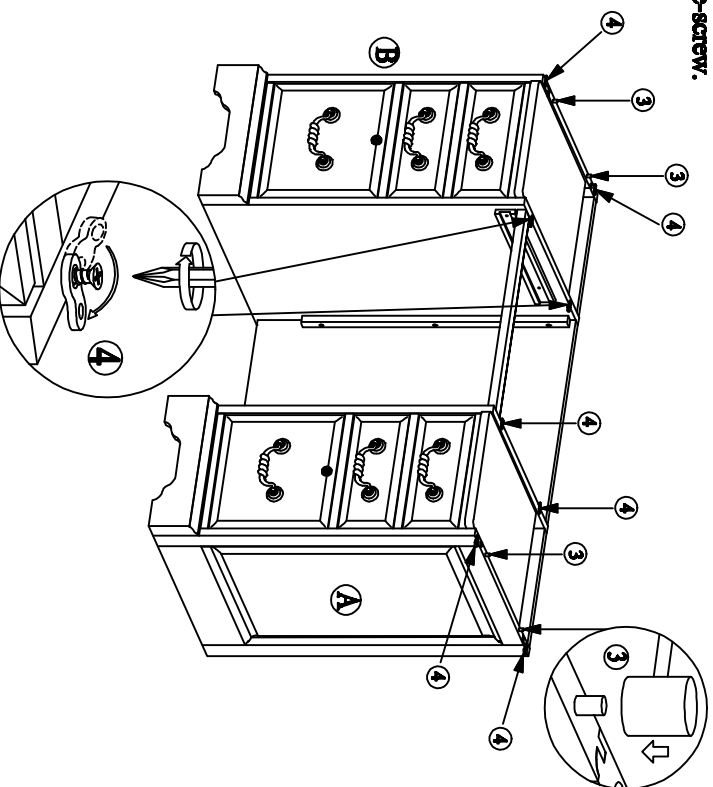

- ⑤ Insert short (3/4") flat head wood screws (8 PCS) through Metal figure 8 to connect Desk Top **E** and pedestals.

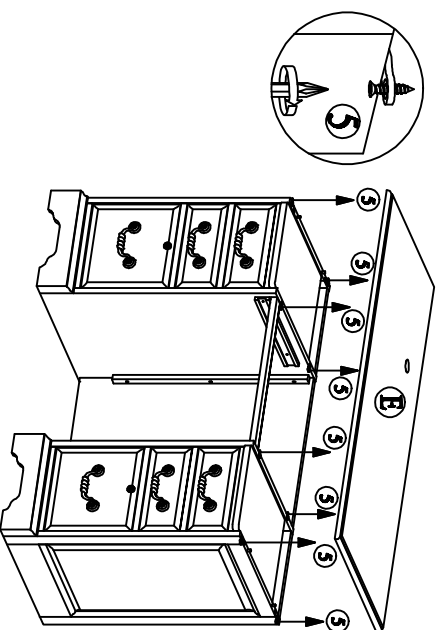

- ⑥ Install the Drop Front center Drawer **F** to place.
Important:
(Be sure to move the ball bearing retainer all the way to the front of the glide and carefully slide the rails into the glides and ball bearing retainer.)

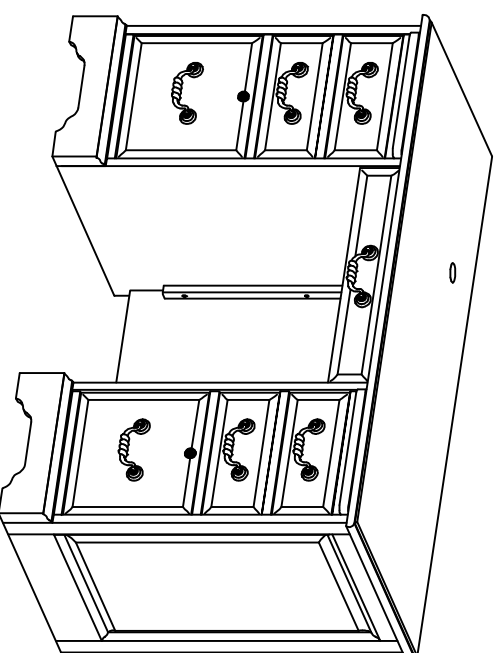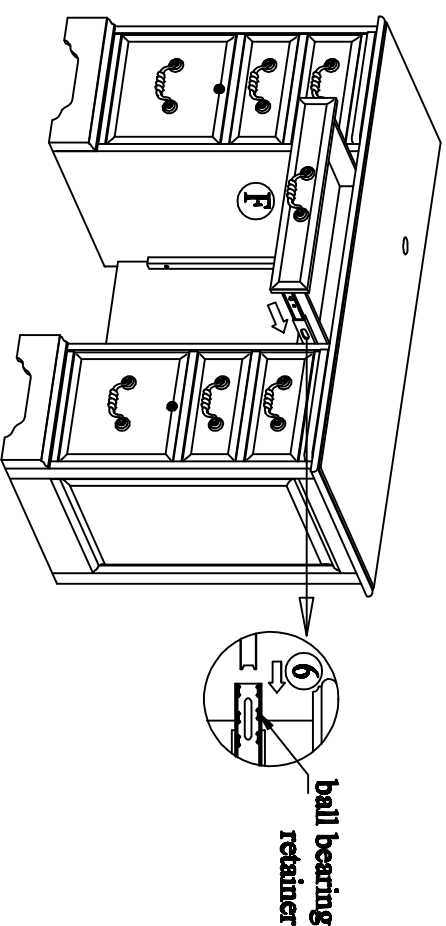

Assembly is now complete.