

# MSA Latchways® Mini Personal Fall Limiter



Impressive Innovation in a Compact Size



## MSA Latchways Mini PFL

Suitable for multiple applications, 6-ft. (1.8 m)  
Mini PFL is designed specifically for environments  
where close anchorage is available.

### Compact and Versatile

The Latchways Mini PFL is the most compact and lightweight self retracting lanyard ever developed using multiple spring radial energy-absorbing technology. Design eliminates need for external energy-absorber outside of the housing, resulting in the smallest self-retracting lanyard on the market.

### Reliable and Reassuring

Latchways Lifecycle Warranty means that users can work at heights with confidence that the Mini PFL will continue to provide safety when it matters most. Unit offers fall arrest and restraint for users 130 to 400 lbs. (60 to 181 kg) including tools.

### Strong and Tested


Latchways Mini PFL has a highly durable polycarbonate, clear casing, allowing for easy visual inspection of critical internal components. Unit can withstand temperatures ranging from -40° to +130° F (-40° to +54° C); high-performing, high-strength webbing lifeline is manufactured to the highest standard in accordance to strict MSA quality-control procedures. Latchways Mini PFL has been tested to these relevant standards:

- ANSI Z359.14 Class B
- OSHA 1910.66
- OSHA 1926.502
- CSA Z259.2.2-98
- EN360: 2002



*Because every life has a **purpose...***

## Latchways Single-Leg Mini PFL

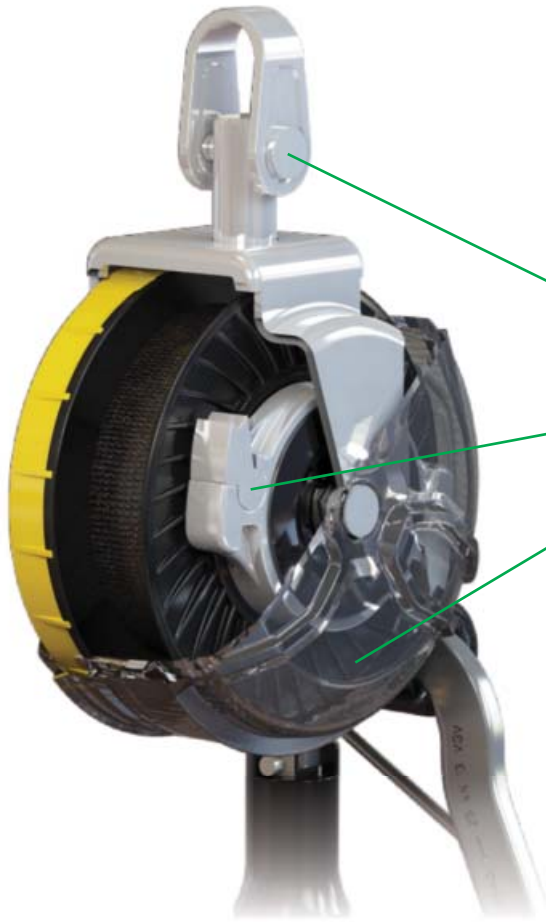

**The world's first self retracting lifeline with multiple spring radial energy-absorbing technology**

- Integral energy absorber
- Requires zero recalibration or adjustment
- Energy absorber is completely sealed from external contaminants

**Free range of motion**

Fully rotating attachment point for complete flexibility—both 360° and 180°

**Precision engineering**

Structurally reinforced pawl mechanism

**Highly durable**

Polycarbonate case houses SRL; transparency allows for easy visual inspection of critical internal components

**Superior materials**


Components manufactured from high-grade stainless steel and engineered plastics

## Latchways Twin-Leg Mini PFL




# Available Connectors

Latchways Mini PFL offers choice of steel or aluminum top carabiner and variety of available connectors.

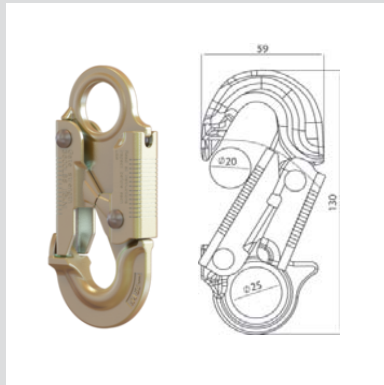


### Forged Steel Snaphook (36C)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- EN-, ANSI- and CSA-compliant

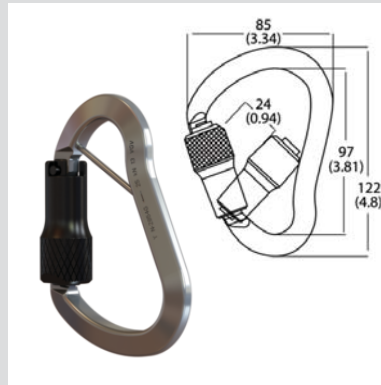


### Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- EN-, ANSI- and CSA-compliant

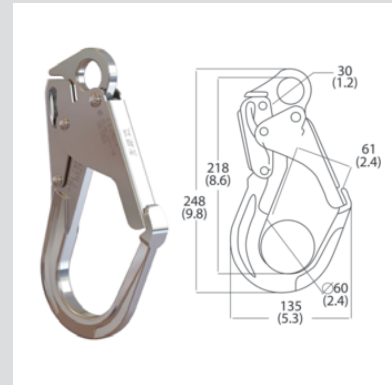


### Aluminum Scaffold Hook (AL36CL)

- Aluminum alloy
- EN-, ANSI- and CSA-compliant

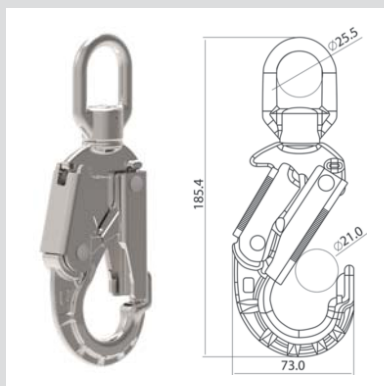

### Forged Steel Swivel Snaphook (36CS)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

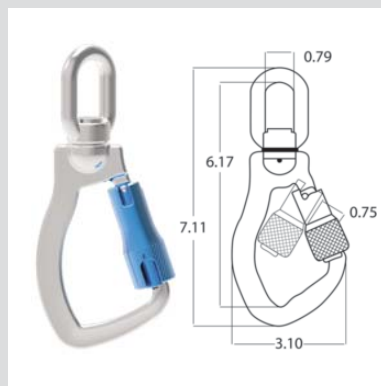

### Swivel Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- ANSI-, CSA- and EN-compliant



### Steel Scaffold Hook (36CL)

- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

## Ordering Information

Part Number	Type			Line Length	Anchorage Connection	Harness Connection	Standards	
	Single-leg	Twin-Leg	Tie-Back				ANSI	CSA
63011-00A	■			6 ft. (1.8 m)	AL36CL	Steel carabiner	■	■
63011-00B	■			6 ft. (1.8 m)	36C	Steel carabiner	■	■
63011-00C	■			6 ft. (1.8 m)	Aluminum swivel carabiner	Steel carabiner	■	■
63011-00D	■			6 ft. (1.8 m)	Aluminum carabiner	Steel carabiner	■	■
63011-00E	■			6 ft. (1.8 m)	36CS	Steel carabiner	■	■
63011-00F	■			6 ft. (1.8 m)	36CL	Steel carabiner	■	■
63011-00G	■			6 ft. (1.8 m)	AL36CL	—	■	■
63011-00H	■			6 ft. (1.8 m)	36C	—	■	■
63011-00I	■			6 ft. (1.8 m)	Aluminum swivel carabiner	—	■	■
63011-00J	■			6 ft. (1.8 m)	Aluminum triple-lock carabiner	—	■	■
63011-00K	■			6 ft. (1.8 m)	36CS	—	■	■
63011-00L	■			6 ft. (1.8 m)	36CL	—	■	■
63011-00M	■			6 ft. (1.8 m)	AL36CL	Aluminum triple-lock carabiner	■	■
63011-00N	■			6 ft. (1.8 m)	Triple-lock carabiner	Triple-lock carabiner	■	■
63111-00A		■		6 ft. (1.8 m)	AL36CL (2)	Twin-Link Connector	■	■
63111-00B		■		6 ft. (1.8 m)	36C (2)	Twin-Link Connector	■	■
63111-00C		■		6 ft. (1.8 m)	Aluminum swivel carabiner (2)	Twin-Link Connector	■	■
63111-00D		■		6 ft. (1.8 m)	Aluminum triple-lock carabiner (2)	Twin-Link Connector	■	■
63111-00E		■		6 ft. (1.8 m)	36CS (2)	Twin-Link Connector	■	■
63111-00F		■		6 ft. (1.8 m)	36CL (2)	Twin-Link Connector	■	■
63041-00A			■	9 ft. (2.7 m)	FP5K	Steel carabiner	■	
63141-00A			■	9 ft. (2.7 m)	FP5K (2)	Twin-Link Connector	■	
63041-00ACA			■	9 ft. (2.7 m)	FP5K	Steel carabiner		■
63141-00ACA			■	9 ft. (2.7 m)	FP5K (2)	Twin-Link Connector		■

Latchways Mini Twin-Link	
Part Number	Description
63900-04	Twin-link connector for Mini PFL

Twin-Link Connector



Single-Leg



Twin-Leg



Single-Leg Tie-Back



Twin-Leg Tie-Back



Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



**MSA – The Safety Company**  
 1000 Cranberry Woods Drive  
 Cranberry Township, PA 16066 USA  
 Phone 724-776-8600  
[www.MSAsafety.com](http://www.MSAsafety.com)

**U.S. Customer Service Center**  
 Phone 1-800-MSA-2222  
 Fax 1-800-967-0398

**MSA Canada**  
 Phone 1-800-672-2222  
 Fax 1-800-967-0398

**MSA Mexico**  
 Phone 01 800 672 7222