




CONCRETE LOOK

CONCRETE MASONRY™
GLAZED PORCELAIN

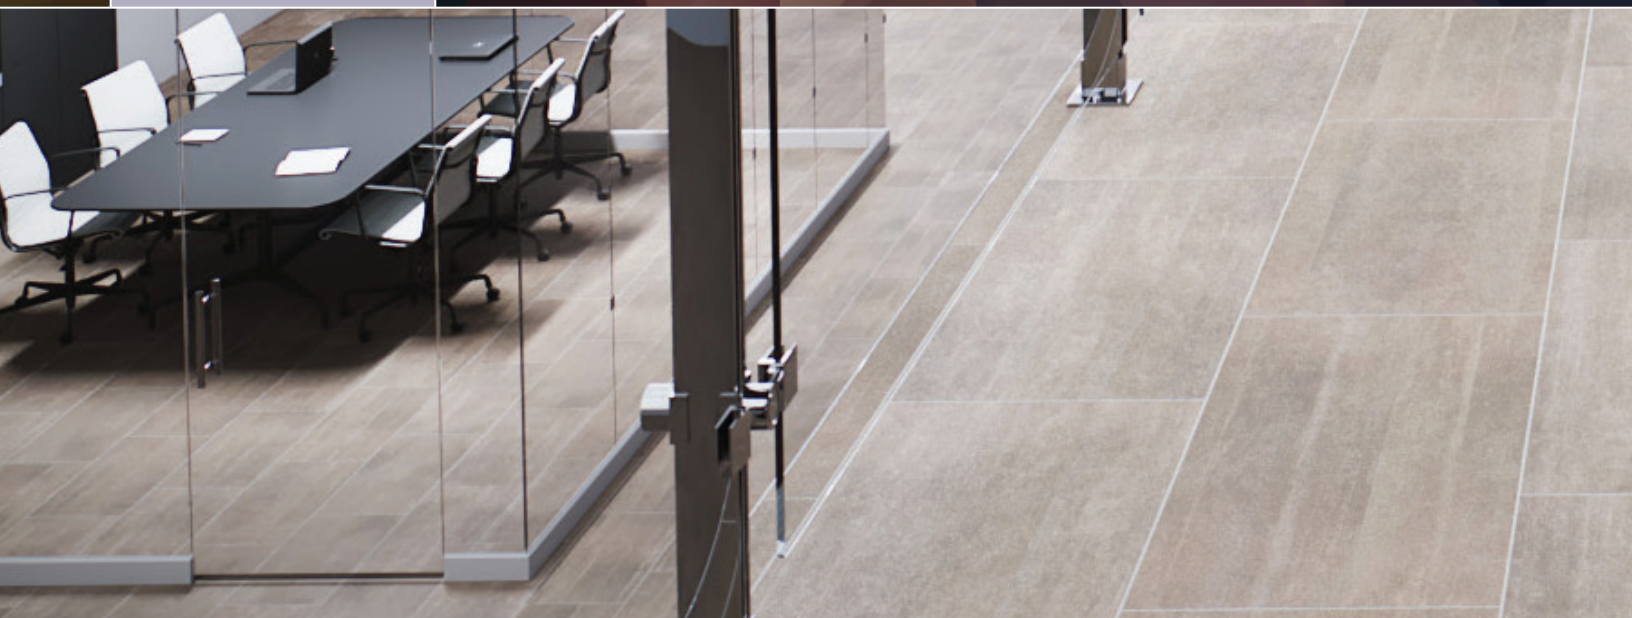

CONCRETE MASONRY™

GLAZED PORCELAIN

Crafted with Character

Concrete Masonry™ was inspired by the Italian word “cassero” meaning formwork. This process involves the creation of concrete, which leaves ridges from a wood mold – the linear effect is from the wood grain transferred to the concrete, creating a wood-concrete blend visual. Concrete Masonry™ has a mainstream aesthetic – fitting for design styles like wabi-sabi, modern, and industrial.

CONCRETE
LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



REVEAL
SYNC3D™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



PG
GLAZED
PORCELAIN



LOW HIGH

SPECIAL FEATURES

SEE CHARTS FOR FULL
PRODUCT DETAILS.



Cover photo features Concrete Masonry™ Greige 15 x 30 on the floor.
Above photo features Concrete Masonry™ Greige 15 x 30 on the floor and Sculpture Grey, 15 x 30 on the walls.

SIZES:



FINISHES: MATTE

COLOR PALETTE



SCULPTURE
GREY



ARTISAN
GREY



GREIGE

FLOOR TILE



SCULPTURE GREY P035



ARTISAN GREY P036



GREIGE P038



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™






SIMPLICLEAN™

CONCRETE MASONRY™

GLAZED PORCELAIN

CONCRETE LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
	15 x 30 Floor Tile	(14-15/16" x 30-1/8") (38.00 cm x 76.50 cm)	5/16"		

 Matte Finish

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors - Standard Center Drain (Residential or Commercial)	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltilo.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8,0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltilo.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltilo.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltilo.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit daltilo.com.

 PRE-CONSUMER RECYCLED MATERIALS

 POST-CONSUMER RECYCLED MATERIALS

 MADE IN THE U.S.A.

 REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltilo.com.



ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltilo® products and information, visit our website at daltilo.com.

 **daltilo**[®]
IMAGINE WHAT'S POSSIBLE™

©2024 Daltilo (12/24)