

5.0mm | 20 mil

# MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN

PROSERIES™  
LUXURY VINYL FLOORING

 daltile



 VitaCore™  
PVC FREE VINYL

  
TitanGuard™

5.0mm | 20 mil

# MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN

Multimedia Terrazzo offers the unique beauty of terrazzo and a one-of-a-kind aesthetic to glue down luxury vinyl. Its contemporary palette of tonal blends and organic flecking delivers visual impact and subtle texture; perfect for a bold aesthetic with effortless installation. Experience Multimedia Terrazzo, one of the many creative expressions waiting to be explored within the Multimedia Collection.

## BOLD & SUSTAINABLE

- Constructed using Vitacore™, an innovative PVC-free material made from recycled content
- 20 mil wear layer for heavy commercial applications
- Embossed
- TitanGuard™ Technology
- 100% Waterproof



Cover photo features Multimedia™ Terrazzo, Lake, 18 x 18 on the inner floor and Multimedia™ Concrete, 18 x 18 on the outer floor.  
Above photo features Delta, 18 x 36 on the floor.

5.0mm | 20 mil


# MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN

SIZES:




18 x 36  
Floor Tile




18 x 18  
Floor Tile


## 18 x 36 FLOOR SIZE

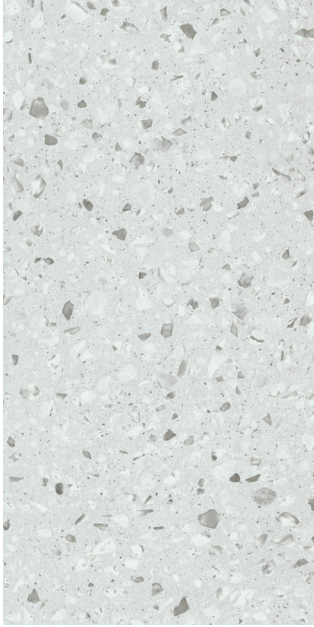


STREAM MZ31

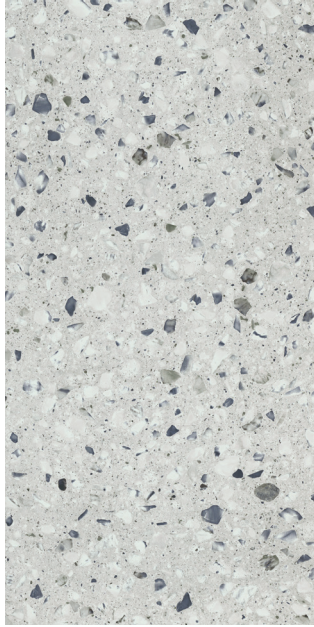

LAKE MZ33

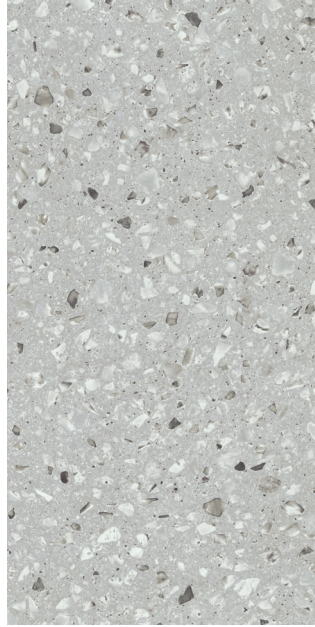


RIVER MZ30

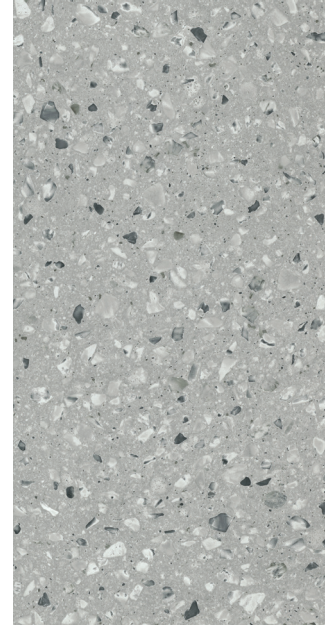


DELTA MZ32


## 18 x 18 FLOOR SIZE




STREAM MZ31



LAKE MZ33



RIVER MZ30



DELTA MZ32

5.0mm | 20mil

# MULTIMEDIA™ TERRAZZO

FLEXIBLE GLUE DOWN



NOISE REDUCING



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

## SPECIFICATIONS

### 18" x 18"

### 18" x 36"

Product Type:	LVF Dry Back	LVF Dry Back
Installation:	Glue Down	Glue Down
Thickness:	5.0 mm	5.0 mm
Wear Layer:	20 Mil (0.508)	20 Mil (0.508)
Finish:	TitanGuard™ Technology	TitanGuard™ Technology
Size:	18" W x 18" L	18" W x 36" L
Underlayment:	N/A	N/A
Bevel:	Beveled	Beveled
Embossing:	Embossed	Embossed
Plank Variation:	6 pcs / 13.5 SF	3 pcs / 13.5 SF
Sq. Ft./Carton:	27	27
Pieces/Carton:	12 pcs/carton	6 pcs/carton
Weight	4.4 lbs per pc/ 52.80 lbs per carton	8.8 lbs per pc/ 52.80 lbs per carton
Warranty:	Limited Lifetime Residential Warranty Limited 30 Year Multifamily Warranty Limited 30 Year Light Commercial Warranty Limited 20 Year Commercial Warranty Limited 10 Year Heavy Commercial Warranty	Limited Lifetime Residential Warranty Limited 30 Year Multifamily Warranty Limited 30 Year Light Commercial Warranty Limited 20 Year Commercial Warranty Limited 10 Year Heavy Commercial Warranty
Installation Advisory:	Please refer to the LVF glue down installation guide for adhesive recommendations, available on <a href="http://daltile.com/LVF">daltile.com/LVF</a>	
Stocking Platform:	5.0 mm   20 mil	
Special order Platform:	Additional platforms available on special order. Minimum quantities apply. Contact your Daltile representative for additional information.	

## PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type B Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010" max
Size and Tolerance:	ASTM F2421 - Passes - ± 0.024 in.
Thickness:	ASTM 386/387 - Passes - ± 0.199 in.
Flexibility:	ASTM F137 - Passes - 1" mandrel, no crack or break
Dimensional Stability:	ASTM F2199 - Passes - L: -0.007 W: -0.006
Static Load Limit:	ASTM F970 - Passes - Average = 0.003 in.
Residual Indentation:	ASTM F1914 - Passes - 4.76%
Resistance To Chemicals:	ASTM F925 - Passes - No change observed
Resistance To Light:	ASTM F1515 - Passes - ΔE < 8.0
Resistance To Heat:	ASTM F1514 - Passes - Average ΔE < 8.0
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (> 0.45w/cm2)
Smoke Density:	ASTM E662 - Part A - Passes - <450 W/cm2

## NOTES

See [daltile.com/LVF](http://daltile.com/LVF) for recommended installation and care guidelines.



7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of  
Daltile® products and information,  
visit our website at [daltile.com/LVF](http://daltile.com/LVF)

**PROSERIES™**  
LUXURY VINYL FLOORING



©2026 Dal-Tile, LLC (03/26)