

CONSTELLAIRE™
GLAZED PORCELAIN FLOOR AND WALL TILE

MARAZZI 

COTTO LOOK



CONSTELLAIRE™

Achieve balance and harmony with Constellaire, Moroccan-inspired porcelain floor and wall tile collection featuring an intricate interlocking cross and star design. Earthy texture and moderate color variation reflect natural elements, allowing connection to enduring traditional motifs, while embracing a contemporary style. This series offers both matte cotto and glossy Zellige-inspired finishes, available in a range of neutral and richly saturated hues, including mixed-finish decorative pieces for added dimension. Curate your combination of star and cross options in Constellaire for design possibilities as endless as the night sky.



Cover photo features Halo, 8 x 8 Star, and Orion 6 x 6 Cross on the floor. Above photo features Aries, 6 x 6 Cross and 8 x 8 Star on the floor & Eclipse, 6 x 6 Cross and Aries, 8 x 8 Star on the walls.

COTTO LOOK


FINISHES: MATTE | GLOSSY

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
FLOOR WALL COUNTERTOP SHOWER FLOOR EXTERIOR FLOOR	PG6 <small>GLAZED PORCELAIN</small>	LOW HIGH	STEPWISE™ TRUEEDGE™ REVEAL SYNCID™ MADE IN THE U.S.A. LARGE FORMAT MOSAIC/DECO ENCAUSTIC TERRAZZO PAVER CUSTOMIZE

COTTO LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

8 x 8 STAR AND 6 x 6 CROSS WALL TILE

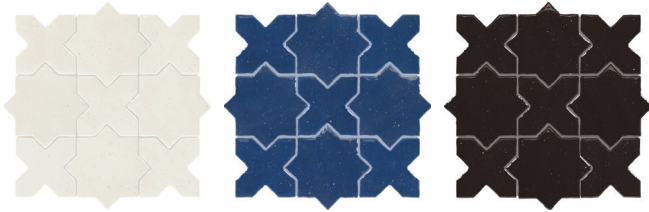


CE57 Callisto CE58 Nova CE59 Eclipse

8 x 8 STAR AND 6 x 6 DECO CROSS WALL TILE



CE64 Helix CE65 Aurora

8 x 8 STAR WALL TILE

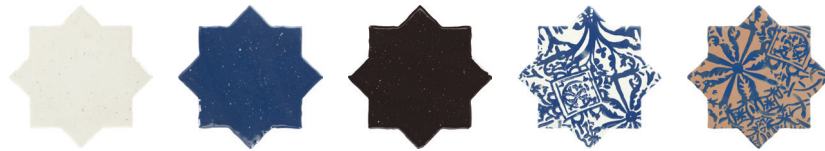


CE57 Callisto CE58 Nova CE59 Eclipse CE64 Helix CE65 Aurora

6 x 6 CROSS WALL TILE



CE57 Callisto CE58 Nova CE59 Eclipse CE64 Helix CE65 Aurora

8 x 8 STAR AND 6 x 6 CROSS FLOOR TILE

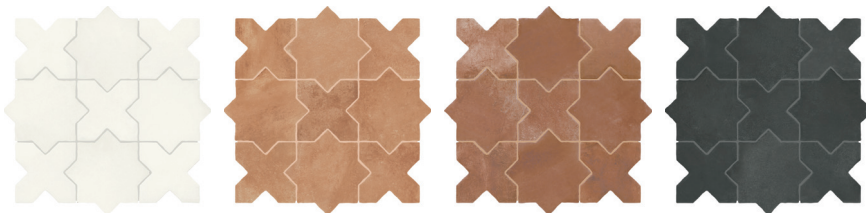

CE60 Orion CE61 Halo CE62 Aries CE63 Nebula

8 x 8 STAR FLOOR TILE



CE60 Orion CE61 Halo CE62 Aries CE63 Nebula

6 x 6 CROSS FLOOR TILE



CE60 Orion CE61 Halo CE62 Aries CE63 Nebula



VISIT MARAZZIUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE | GLOSSY

USAGE	MATERIAL	PRICING	SPECIAL FEATURES
FLOOR WALL COUNTERTOP SHOWER FLOOR EXTERIOR FLOOR	PG GLAZED PORCELAIN	LOW HIGH	STEPWISE™ TRUEEDGE™ REVEAL SYNCID™ MADE IN THE U.S.A. LARGE FORMAT MOSAIC/DECO ENCAUSTIC TERRAZZO PAVER CUSTOMIZE

COTTO LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Finish
	8 x 8 Star Floor Tile	8-1/4" x 8-1/4" (21.00 cm x 21.00 cm)	5/16"	M
	8 x 8 Star Wall Tile	8-1/4" x 8-1/4" (21.00 cm x 21.00 cm)	5/16"	G
	6 x 6 Cross Floor Tile	5-7/8" x 5-7/8" (15.00 cm x 15.00 cm)	5/16"	M
	6 x 6 Cross Wall Tile	5-7/8" x 5-7/8" (15.00 cm x 15.00 cm)	5/16"	G

M Matte Finish **G** Glossy Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■*
Wet & Level – Interior Floor	≥ 0.42	■*
Shower Floors – Standard Center Drain	≥ 0.42	■*
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)
	≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte floor tile only.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

POST-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

ZERO TO X

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	V2 Medium Variation (CE57, CE58, & CE59 only)
	V3 High Variation (CE60, CE63, & CE64 only)
	V4 Random Variation (CE61, CE62, & CE65 only)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	≥ 275 lbf	≥ 275 lbf
Scratch Hardness	C1895	8.0	≥ 6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	③	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Star and Cross tiles are packaged and sold separately. For proper installation, both shapes must be combined to achieve the intended interlocking pattern.