

MODERN FORMATION™

COLORBODY™ PORCELAIN FLOOR WITH STEPWISE™ TECHNOLOGY

MARAZZI®

STONE LOOK



MODERN FORMATION™

Drawing inspiration from the strength and nuanced beauty of natural limestone, Modern Formation redefines what stone-inspired design can be. From serene interiors to dynamic exterior spaces, this series stands as a testament to the evolving relationship between nature and modern architecture.



STEPWISE™

50% MORE
SLIP RESISTANT
THAN ORDINARY TILE†

†When compared to tile meeting ANSI Standards



Cover photo features Modern Formation™ Peak White, 12 x 24 on the floor, with Creativo™ Lucca Blue, 12 x 12 as a decorative border. Above photo features Modern Formation™ Headland Fog, Chevron Mosaic on the wall, and Persuade™ Beige, 12 x 24 on the floor.

STONE LOOK


FINISHES: MATTE | LIGHT POLISHED | TEXTURED




STONE LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

COLORBODY™ PORCELAIN FLOOR TILE

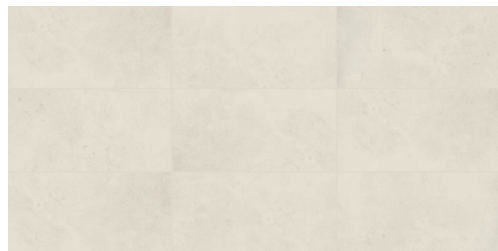

MF01 Peak White

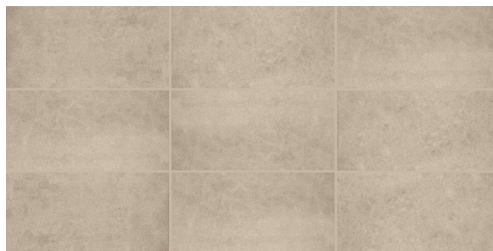

MF02 Overland Beige



MF03 Canyon Taupe



MF04 Headland Fog



MF05 Smoky Ridge



MF06 Mesa Point

MIXED CHEVRON MOSAIC TILE



MF01 Peak White



MF02 Overland Beige



MF03 Canyon Taupe



MF04 Headland Fog



MF05 Smoky Ridge



MF06 Mesa Point

2 x 2 MOSAIC TILE



MF01 Peak White



MF02 Overland Beige



MF03 Canyon Taupe



MF04 Headland Fog



MF05 Smoky Ridge



MF06 Mesa Point



VISIT [MARAZZIUSA.COM/WHYTILE](https://www.marazziusa.com/whytile) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

†When compared to tile meeting ANSI Standards

FINISHES: MATTE | LIGHT POLISHED | TEXTURED

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

MATERIAL

PC

COLORBODY™

PRICING

LOW

HIGH

SPECIAL FEATURES

STEPWISE™

TRUEEDGE™

REVEAL SYNC'D™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

STONE LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
	24 x 48 Floor Tile	23-3/8" x 46-15/16" (59.44 cm x 119.30 cm)	5/16"	M LP	
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	LP	
	12 x 24* Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	M LP T	
	2 x 2 Mosaic - Matte (Mesh-mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	5/16"	M	
	Mixed Chevron Mosaic (Mesh-mounted)	(12" x 13" Sheet) (30.48 cm x 33.02 cm Sheet)	5/16"	MX	

Made in the U.S.A. designation is subject to change. Please visit marazziusa.com for the most current manufacturing information.

M Matte Finish LP Light Polished Finish T Textured Finish

MX Mixed Finish(Matte, Light Polished & Textured)

*Stepwise™ technology is available in the textured finish only.

TRIM

Description	Number	Size	Shape	Finish
Floor Bullnose	P43F9	3 x 24		M LP
Cove Base	P36C9	6 x 12		M
Cove Base Outcorner	PC36C9	1 x 6		M

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

M Matte Finish LP Light Polished Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■
Wet & Level – Interior Floor	≥ 0.42	■*
Shower Floors – Standard Center Drain	≥ 0.42	■**
Shower Floors – Linear Drain	≥ 0.42 (Mosaic)	■**
	≥ 0.60 (Floor)	■***
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	■***
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	■**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

- * Matte, Textured Floor and 2 x 2 Mosaic tile only.
- ** 2 x 2 Mosaic tile only.
- *** 12 x 24 Textured Floor tile only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) Mosaic: 1/8"	High Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Results
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazziusa.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

CERTIFIED PORCELAIN

ZERO TROX

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.